



(51) International Patent Classification:

H01R 13/58 (2006.01) *H01R 13/502* (2006.01)
H01R 13/658 (2011.01) *H01R 13/516* (2006.01)
H01R 9/03 (2006.01)

(21) International Application Number:

PCT/US2011/057503

(22) International Filing Date:

24 October 2011 (24.10.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/911,111 25 October 2010 (25.10.2010) US

(71) Applicant (for all designated States except US): **TYCO ELECTRONICS CORPORATION** [US/US]; 1050 Westlakes Drive, Berwyn, PA 19312 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MYONG, Inho** [US/US]; c/o Tyco Electronics Corporation, 305 Constitution Drive, Menlo Park, CA 94025 (US). **YEE, Keith, Thomas** [US/US]; c/o Tyco Electronics Corporation, 305 Constitution Drive, Menlo Park, CA 94025 (US).

(74) Agent: **GERSTNER, Marguerite, E.**; Tyco Electronics Corporation, Intellectual Property Law Dept., 309 Consti-

tution Drive, MS R34/2A, Menlo Park, CA 94025-1164 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ROTATIONALLY CONFIGURABLE BACKSHELL FOR AN ELECTRICAL CONNECTOR

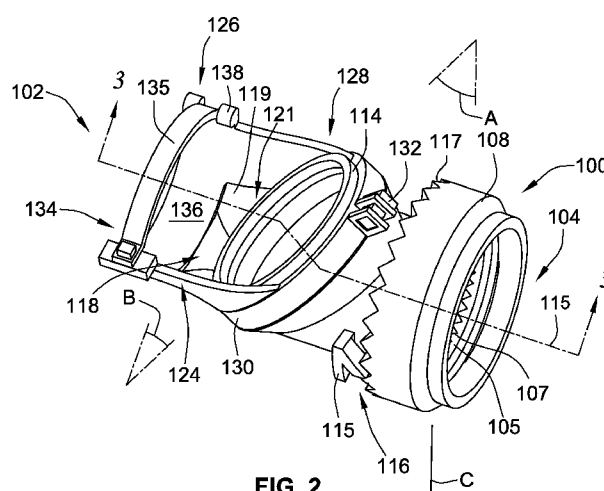


FIG. 2

(57) Abstract: A backshell (60) for an electrical assembly (50) is provided. The backshell includes a shield termination body (114) having a connector end (116) and a relief end (118). The connector end is configured to join to a cable end (56) of an electrical connector (52). A face (117) of the connector end is oriented at an angle with respect to a face (121) of the relief end. A strain relief (124) is provided having a shield end (128) and a cable clamp end (126). A face (129) of the shield end is oriented at an angle with respect to a face (125) of the cable clamp end. The shield end is rotatably coupled to the relief end of the shield termination body. The shield end of the strain relief is rotatable with respect to the relief end of the shield termination body so that the face of the cable clamp end of the strain relief is positionable at variable angles with respect to the face of the connector end of the shield termination body.