



- (51) **International Patent Classification:** Not classified
- (21) **International Application Number:**
PCT/RU2012/000098
- (22) **International Filing Date:**
13 February 2012 (13.02.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2011105298 15 February 2011 (15.02.2011) RU
- (71) **Applicants (for all designated States except US):** **OBSCHESTVO S OGRANICHENNOI OTVETSTVENNOSTYU "KOSMICHESKIE SISTEMY SPASEN-IYA"** [RU/RU]; ul. Leningradskoe Shosse, 25 A, Khimki, Moskovskaya obl., 141400 (RU). **FILATOV, Andrey Vasilyevich** [RU/RU]; ul. Gorkogo, 14b-339, Korolev, Moskovskaya obl., 141080 (RU).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **KULIK, Sergey Vasilyevich** [RU/RU]; ul. Michurinsky prospekt, 29/2-185, Moscow, 117607 (RU). **METELEV, Yury Alekseevich** [RU/RU]; ul. Kulakova, 1-1-10, Moscow, 123181 (RU).
- (74) **Agent:** **KOSUNOV, Olzhibek Almasovich;** p/o box N° 66, Moscow, 105122 (RU).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— of inventorship (Rule 4.17(iv))

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) **Title:** DEVICE AND METHOD FOR RESCUING FROM A HIGH-RISE FACILITY

Fig. 1

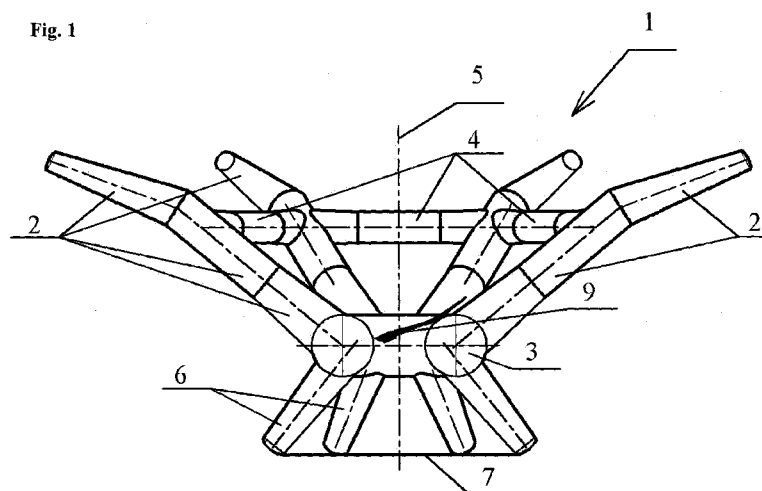

(57) **Abstract:** The present invention relates to the devices and methods for rescuing, particularly to the devices for rescuing people from high-rise facilities, for example, upper floors of multistorey buildings. Disclosed is a device for rescuing from a high-rise facility comprising several resilient for bending spokes interconnected on one end to form a pyramidal figure, wherein the spokes are located on the edges, an aerodynamic deceleration element fastened to the spokes, connectors located between the adjacent resilient for bending spokes, in so doing the connectors are located at some distance from the ends of the resilient for bending spokes, a buffer element fastened in a point of connection of the resilient for bending spokes and a means of fastening an object to be rescued fastened in the point of connection of the resilient for bending spokes on the other side with respect to the buffer element, in so doing each of the resilient for bending spokes is embodied as curved sideways from a central axis of the device.

