

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 February 2002 (07.02.2002)

PCT

(10) International Publication Number
WO 02/011226 A3

(51) International Patent Classification⁷: **H01M 4/94**,
4/86, 8/02, 8/10, 8/12

(21) International Application Number: PCT/US01/20032

(22) International Filing Date: 22 June 2001 (22.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/222,128 31 July 2000 (31.07.2000) US
60/244,208 31 October 2000 (31.10.2000) US

(71) Applicant (for all designated States except US): **NUVANT SYSTEMS, INC.** [US/US]; 10 West 33rd Street, Suite 127, Chicago, IL 60616 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SMOTKIN, Eugene, S.** [US/US]; 720 South Dearborn Street #606, Chicago, IL 60605 (US).

(74) Agent: **MORRISON & FOERSTER LLP**; 2000 Pennsylvania Avenue, N.W., Washington, DC 20006-1888 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
20 November 2003

[Continued on next page]

(54) Title: HYDROGEN PERMEABLE MEMBRANE FOR USE IN FUEL CELLS, AND PARTIAL REFORMATE FUEL CELL SYSTEM HAVING REFORMING CATALYSTS IN THE ANODE FUEL CELL COMPARTMENT

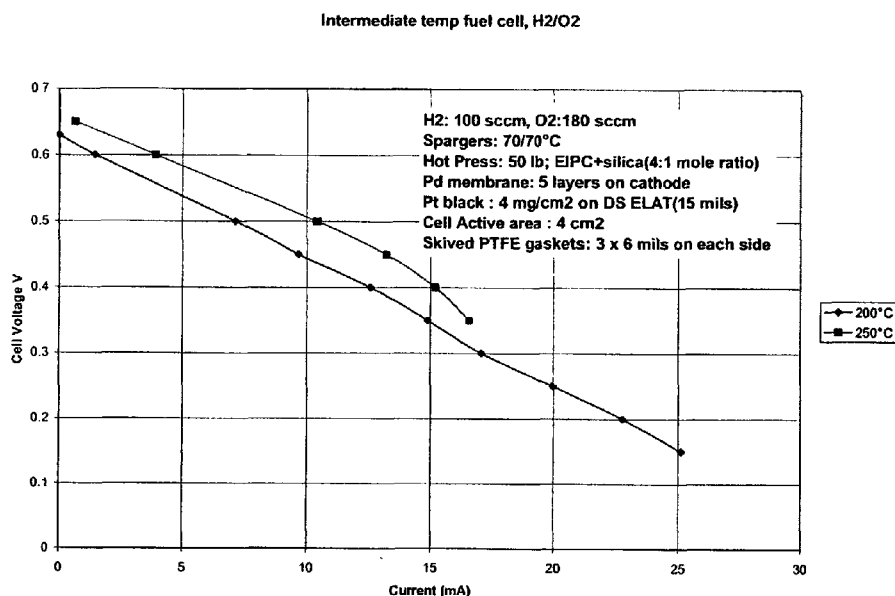

(57) Abstract: An electronically insulating proton conductor (C) is adhered or deposited as a film on a dense phase proton permeable material (D) in a thickness such that the composite C/D has a proton conductivity in a preferred intermediate temperature range of 175-550 °C. The composite C/D is incorporated in a high temperature electrolyte membrane electrolyte assembly (MEA), which is incorporated into a fuel cell that can operate in this intermediate temperature range. The fuel cell in turn is incorporated into a fuel cell system having a fuel reformer in the flow field of a fuel mixture entering the fuel cell or in a mode where the fuel cell receives fuel from an external reformer.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.