



(43) International Publication Date
13 June 2013 (13.06.2013)

- (51) International Patent Classification:
E04B 1/72 (2006.01) *F16K 21/00* (2006.01)
A01M 1/24 (2006.01)
- (21) International Application Number:
PCT/AU2012/001085
- (22) International Filing Date:
11 September 2012 (11.09.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2011905120 8 December 2011 (08.12.2011) AU
2012902368 6 June 2012 (06.06.2012) AU
- (71) Applicant (for all designated States except US):
CHAZANE PTY LTD [AU/AU]; PO Box 204, Cotton
Tree, Queensland 4558 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **ARCHER, Zane**
[AU/AU]; PO Box 204, Cotton Tree, Queensland 4558
(AU).
- (74) Agent: **AHEARN FOX PATENT AND TRADE MARK**
ATTORNEYS; GPO Box 1149, Brisbane, QLD 4001
(AU).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TERMITE BARRIER SEAL

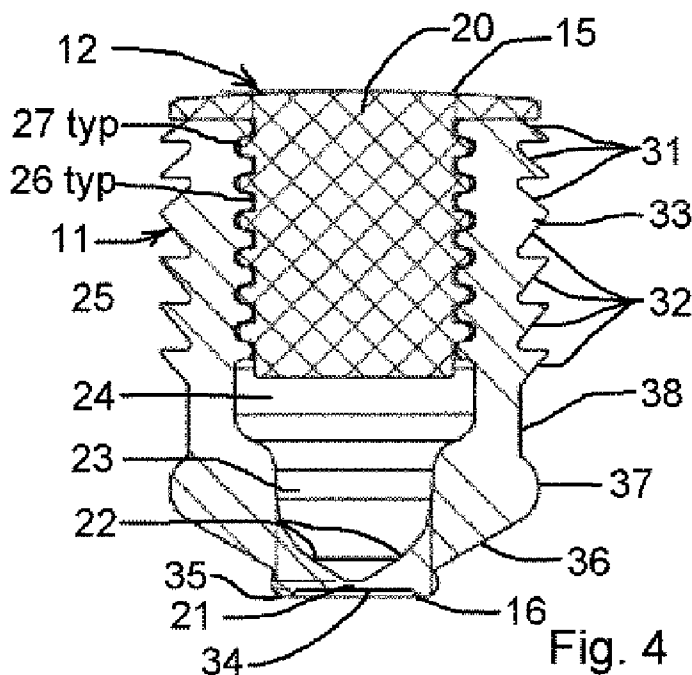

(57) Abstract: A termite barrier seal including: a hollow seal body having a wall surrounding an axial bore extending from an insertion end to a surface end; a closure formation about the surface end for engagement with a closure; the closure for closing the orifice of the bore at the surface end of the seal body when engaged with the closure formation; one-way valving means at or about the insertion or intermediate the insertion end and the surface end of the seal body, the one-way valve means being arranged to permit liquid flow through the axial bore from the surface end to the insertion end, but to prevent liquid flow through the axial bore from the insertion end to the surface end; external seal means about an external surface of the wall of the seal body for sealing the wall of the seal body against the internal surface of a hole drilled through a concrete slab; and internal seal means about an internal surface of the wall of the seal body for sealing the wall of the seal body against an external face of an injector when inserted into the bore of the seal body.

Fig. 4