

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织  
国际局



(10) 国际公布号  
**WO 2020/177157 A1**

(43) 国际公布日  
2020 年 9 月 10 日 (10.09.2020)

(51) 国际专利分类号:  
*G01N 33/49* (2006.01)

国江苏省南京市江宁区科学园乾德路 2 号, Jiangsu 211122 (CN)。

(21) 国际申请号: PCT/CN2019/078980

(22) 国际申请日: 2019 年 3 月 21 日 (21.03.2019)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:  
201910154647.2 2019 年 3 月 1 日 (01.03.2019) CN  
201910154636.4 2019 年 3 月 1 日 (01.03.2019) CN  
201920260232.9 2019 年 3 月 1 日 (01.03.2019) CN

(71) 申请人: 南京岚煜生物科技有限公司 (LANSSION BIOTECHNOLOGY CO., LTD) [CN/CN]; 中国江苏省南京市江宁区科学园乾德路 2 号, Jiangsu 211122 (CN)。

(72) 发明人: 许行尚 (XU, Xingshang); 中国江苏省南京市江宁区科学园乾德路 2 号, Jiangsu 211122 (CN)。 陈杰弗瑞 (CHEN, Jeffery); 中

(74) 代理人: 南京正联知识产权代理有限公司 (NANJING ZHENGLIAN INTELLECTUAL PROPERTY AGENCY CO., LTD.); 中国江苏省南京汉中门大街一号金鹰汉中新城 27 层, Jiangsu 210029 (CN)。

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。

(54) Title: DETECTION SYSTEM FOR MULTI-INDEX COAGULATION ITEMS

(54) 发明名称: 多指标凝血项目检测系统

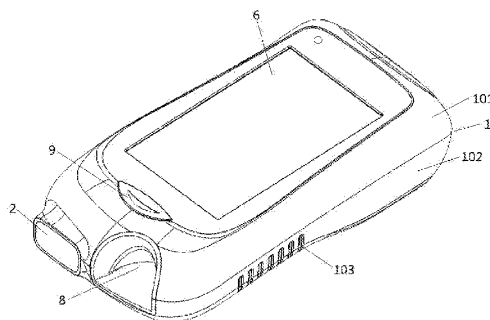


图 1

(57) Abstract: Disclosed is a detection system for multi-index coagulation items, comprising a housing (1), a detection and heating module (4), a battery module (5), a touch display screen (6) and a mainboard (7). The housing (1) comprises an upper housing (101) and a lower housing (102), and the housing (1) is an enclosed space formed by the upper housing (101) abutting the lower housing (102); the mainboard (7) is disposed between the upper housing (101) and the lower housing (102), and is arranged in the enclosed space; the touch display screen (6) is disposed at the upper surface of the upper housing (101), and is connected with the mainboard (7); the detection and heating module (4) is disposed in the enclosed space, and is arranged at the front end of the lower housing (102) for being connected with the mainboard (7); the battery module (5) is arranged at the bottom of the terminal of the lower housing (102), and is connected with the mainboard (7); and a detection inlet (8) used for inserting and placing a detection card (3) is disposed at the front end of the housing (1). No professional is required to operate the described detection system for multi-index coagulation items, and the system has the advantages of immediate detection, high sensitivity, easy operation and high detection precision.

[见续页]

WO 2020/177157 A1

(84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:

— 包括国际检索报告(条约第21条(3))。

(57) 摘要: 一种多指标凝血项目检测系统, 包括外壳(1)、检测加热模块(4)、电池模块(5)、触摸显示屏(6)和主板(7), 外壳(1)包括上壳(101)和下壳(102), 且外壳(1)由上壳(101)和下壳(102)对接围合成密闭空间, 主板(7)设置在上壳(101)与下壳(102)之间且设置在密闭空间内; 触摸显示屏(6)设置在上壳(101)的上表面, 触摸显示屏(6)与主板(7)相连接; 检测加热模块(4)设置在密闭空间内且设置在下壳(102)的前端并与主板(7)相连接, 下壳(102)的末端的底部设有电池模块(5)且电池模块(5)与主板(7)相连接, 外壳(1)的前端设有用于插放测试卡(3)的检测入口(8)。该多指标凝血项目检测系统能够即时检测, 无需专业人员即可操作, 灵敏度高, 操作方便, 且检测精确度高。