

1/3

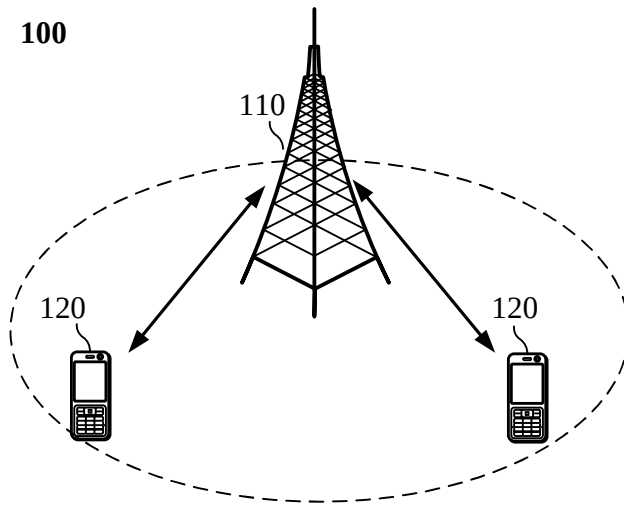


FIG. 1

A communications device obtains a target parameter set, where the target parameter set includes at least one first parameter value and at least one second parameter value

201

The communications device determines, according to the at least one first parameter value, a quantity of bits for transmission of feedback information associated with a first kind of data

202

FIG. 2

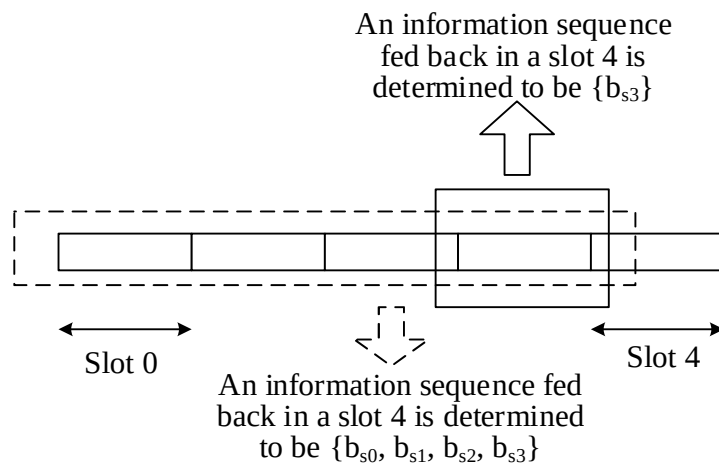


FIG. 3

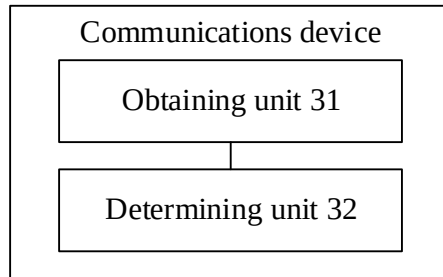


FIG. 4

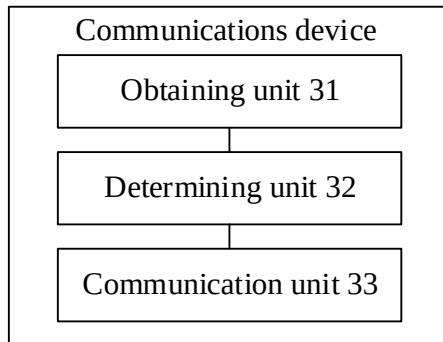


FIG. 5

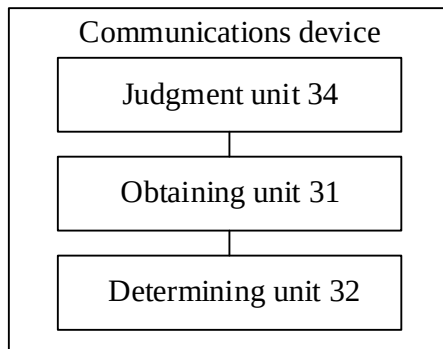


FIG. 6

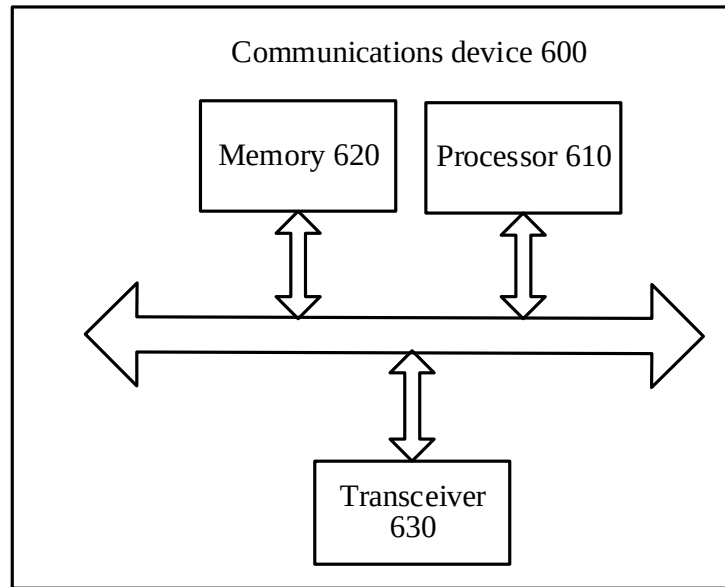


FIG. 7

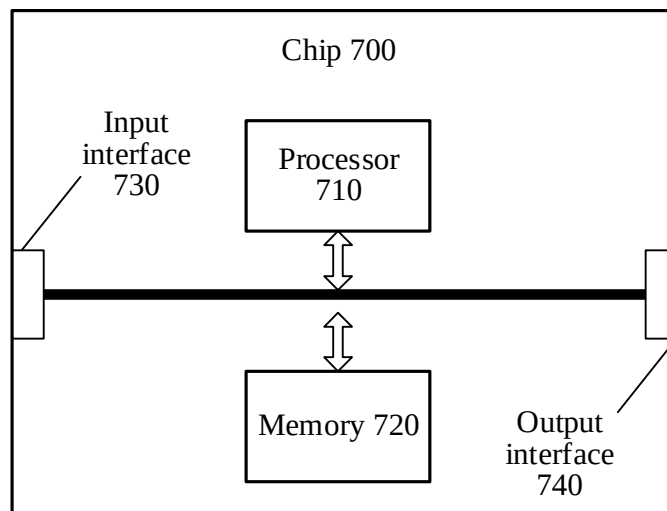


FIG. 8