

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau

\*162162\*

(43) International Publication Date  
14 March 2002 (14.03.2002)

PCT

(10) International Publication Number  
WO 02/20325 A1(51) International Patent Classification<sup>7</sup>: B61B 13/04

(21) International Application Number: PCT/NZ01/00184

(22) International Filing Date:  
7 September 2001 (07.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
506819 8 September 2000 (08.09.2000) NZ

(71) Applicant and

(72) Inventor: CHAPMAN, Lawrence, Hugh [NZ/NZ]; 59  
Felton Mathew Avenue, St Johns, Auckland 1005 (NZ).(74) Agents: WILSON, Kathryn, S. et al.; Level 12, KPMG  
Centre, 85 ALEXANDRA Street, Private Bag, Hamilton 3140  
(NZ).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU,  
ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

Published:


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette

(54) Title: TRANSPORTATION SYSTEM



\*G00002\*

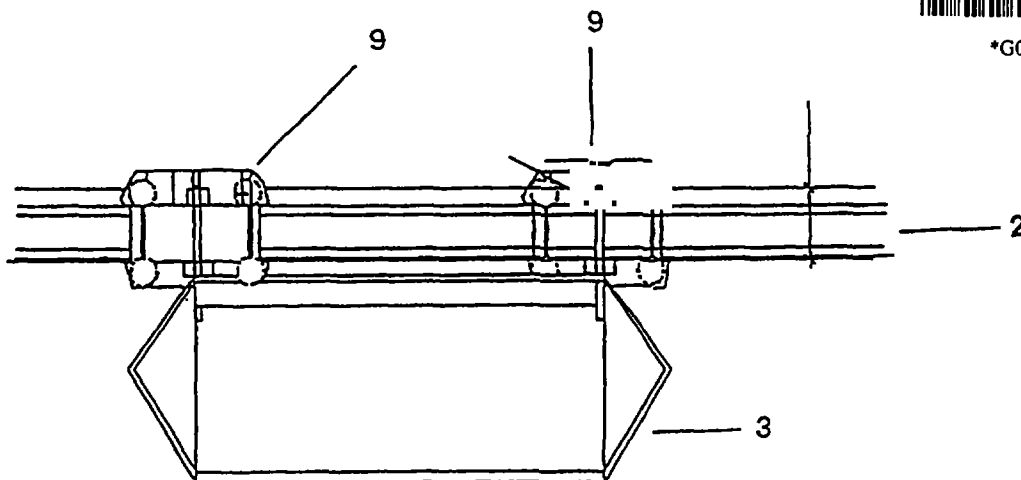

(57) Abstract: The present invention relates to an improved transportation system which includes a plurality of upright supports (1) which elevate at least one track (2). A plurality of cabs (3) are adapted to move along the track or tracks (2) provided where the cabs (3) suspended from a track (2) so that the centre of mass of the cabs (3) is located below the track (2). A single track (2) provides a pair of rail elements on opposite sides of the track (2) where the first rail element is adapted to support cabs (3) moving in substantially the opposite direction to cabs (3) supported by the second rail element of the same track (2).

WO 02/20325 A1