



(51) International Patent Classification:

H01L 25/075 (2006.01) H01L 33/50 (2010.01)
H01L 27/15 (2006.01)

(21) International Application Number:

PCT/GB2021/051137

(22) International Filing Date:

12 May 2021 (12.05.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2007395.3 19 May 2020 (19.05.2020) GB

(71) Applicant: **PLESSEY SEMICONDUCTORS LTD**
[GB/GB]; Tamerton Road, Roborough, Plymouth Devon
PL6 7BQ (GB).


(72) Inventors: **PILKINGTON, James**; c/o Plessey Semiconductors Ltd, Tamerton Road, Roborough, Plymouth Devon
PL6 7BQ (GB). **MEZOUARI, Samir**; c/o Plessey Semiconductors Ltd, Tamerton Road, Roborough, Plymouth Devon

von PL6 7BQ (GB). **TAN, Wei Sin**; c/o Plessey Semiconductors Ltd, Tamerton Road, Roborough, Plymouth Devon
PL6 7BQ (GB). **WHITEMAN, John**; c/o Plessey Semiconductors Ltd, Tamerton Road, Roborough, Plymouth Devon
PL6 7BQ (GB). **STRICKLAND, Keith**; c/o Plessey Semiconductors Ltd, Tamerton Road, Roborough, Plymouth Devon
PL6 7BQ (GB).

(74) Agent: **WITHERS & ROGERS LLP**; 4 More London
Riverside, London, Greater London SE1 2AU (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: MONOLITHIC RGB MICRO LED DISPLAY

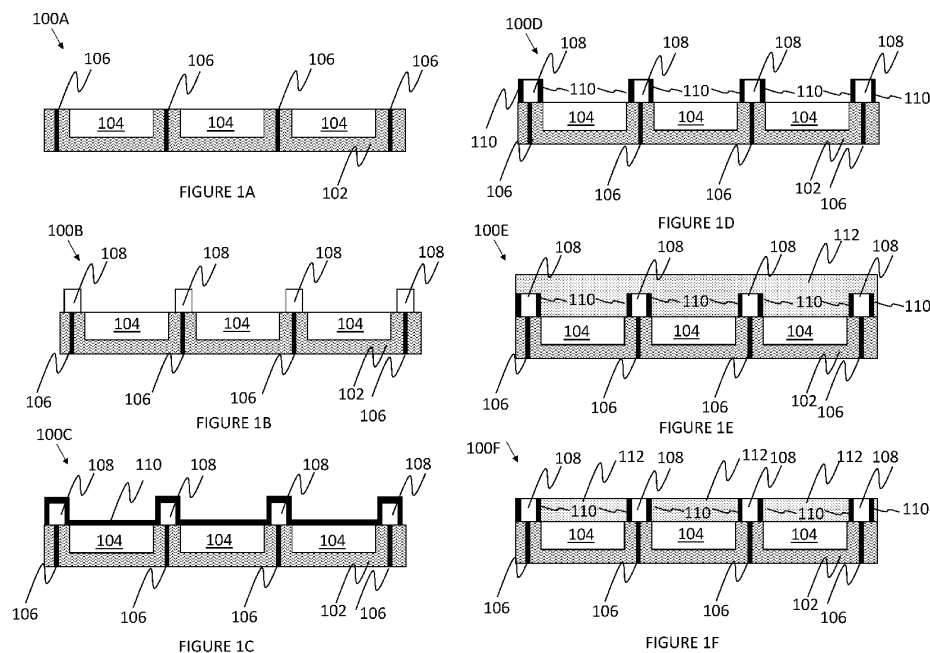

(57) Abstract: A method of forming a light emitting diode array comprising a plurality of light emitting pixels, wherein at least one of the light emitting pixels comprises: a light emitting diode configured to emit light of a first primary peak wavelength; and organic semiconductors dispersed in a medium, wherein the organic semiconductors are configured to receive and convert input light of the first primary peak wavelength from the light emitting diode to provide output light of a second primary peak wavelength.

[Continued on next page]

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))