



- (51) **International Patent Classification:**
H04N 21/854 (2011.01) *H04N 19/117* (2014.01)
- (21) **International Application Number:**
PCT/EP2024/078320
- (22) **International Filing Date:**
09 October 2024 (09.10.2024)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
23306768.5 11 October 2023 (11.10.2023) EP
- (71) **Applicant:** **INTERDIGITAL CE PATENT HOLDINGS, SAS** [FR/FR]; 3 rue du Colonel Moll, 75017 PARIS (FR).
- (72) **Inventors:** **HAMZA, Ahmed**; c/o InterDigital Canada, Ltée., 1000 Sherbrooke St, 10th Floor, MONTREAL, Québec H3A 3G4 (CA). **AUMONT, Franck**; c/o InterDigital, Immeuble ZEN 2, 845A Avenue des Champs Blancs,

35510 CESSON-SEVIGNE (FR). **LE MEUR, Olivier**; c/o InterDigital, Immeuble ZEN 2, 845A Avenue des Champs Blancs, 35510 CESSON-SEVIGNE (FR). **DEMARTY, Claire-Helene**; c/o InterDigital, Immeuble ZEN 2, 845A Avenue des Champs Blancs, 35510 CESSON-SEVIGNE (FR).

(74) **Agent:** **INTERDIGITAL**; Immeuble Zen 2, 845A Avenue des Champs Blancs, 35510 CESSON-SEVIGNE (FR).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,

(54) **Title:** CARRIAGE AND SIGNALING OF DISPLAY ATTENUATION MAPS IN ISOBMFF MEDIA CONTAINERS

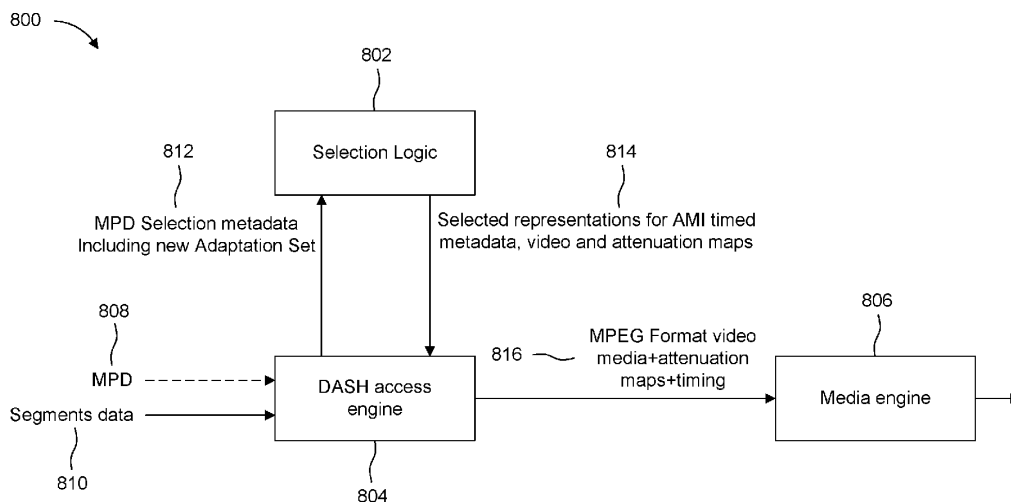


FIG. 8

(57) **Abstract:** A method according to some embodiments comprises obtaining a container file (e.g., an ISOBMFF file), wherein the container file includes: at least one video track representing an encoded video, and a first attenuation map track representing a first attenuation map data stream, the first attenuation map track including a first information box characterizing the first attenuation map data stream. A decoder that obtains the file may decode the video track to obtain a decoded video, decode the first attenuation map track to obtain a decoded attenuation map, and apply the decoded attenuation map to the decoded video to obtain an attenuated video.

[Continued on next page]

TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*