

Description

This invention relates to an aromatic polyester composition. More particularly, this invention relates to an aromatic polyester composition and preparation method thereof, which has excellent mechanical properties such as impact strength, which is excellent in flowability and residence stability in molding, and which has excellent hydrolysis stability, resistance to thermal cycling and weatherability.


Aromatic polyesters represented by polyethylene terephthalate and polybutylene terephthalate are widely used in electric and electronic parts and automobile parts because of their excellent properties. However, aromatic polyesters have intrinsic drawbacks in that they have tendency to decompose during molding and have low hydrolysis stability. Further, as an automobile part, it is increasingly important that the mechanical properties of the automobile parts are not degraded after thermal cycling is repeated. However, since aromatic polyesters have poor resistance to thermal cycling, their use is restricted when used as an underhood part of an automobile. As to the improvement of the hydrolysis stability, it has been proposed to add an epoxy compound or an oxazoline compound to the aromatic polyesters. In particular, the method disclosed in JP-A-82148/80, in which a divalent epoxy compound such as diglycidyl terephthalate is added is relatively more excellent than other methods since the improvement in the hydrolysis stability is greater than those obtained by other methods. However, the resin composition obtained by this method has a drawback in that the flowability and residence stability during molding are extremely poor. To improve the hydrolysis stability without degrading the flowability during molding, it is disclosed in JP-A-87452/82 that a monovalent glycidyl ester compound is added to the aromatic polyesters. However, by this method, the improvement in the hydrolysis stability is small and the heat-aging resistance is poor, so that the method is not satisfactory.

As to the improvement in the resistance to thermal cycling, JP-A-285947/87 discloses a method in which an epoxy group-containing copolymer and a rubbery graft-polymer are added. However, this method has a drawback in that the flowability of the resin during molding is lowered and the hydrolysis stability is low.

Accordingly, the object of the present invention is to provide an aromatic polyester composition and preparation process thereof, which composition gives mouldings having excellent mechanical properties such as impact strength and excels in flowability and residence stability during molding, which also has excellent hydrolysis stability, heat-aging resistance, resistance to thermal cycling and weatherability, and thus which is useful for producing electric or electronic parts and as automobile parts.

The present invention provides according to one aspect, a polyester composition comprising:

- (a) 100 parts by weight of an aromatic polyester;
- (b) 0.005 - 10 parts by weight based on component (a) of an epoxy compound of the formula (I):




(wherein Ar is a C₆ - C₂₀ aromatic group or C₆ - C₂₀ alicyclic group, n is from 0 to 20 inclusive); and

- (c) 1 - 70 parts by weight based on component (a) of at least one elastomer which has at least one functional group selected from epoxy, carboxyl, carboxylate ester, carboxylic acid amide, acid anhydride, imide, carboxylate salt, hydroxyl, amino and cyano groups, the elastomer having a tensile modulus of 1 - 6,000 kg/cm².

According to another aspect, the invention provides a process for producing a polyester composition comprising the steps of:

blending in dry state

- (a) 100 parts by weight of an aromatic polyester;
- (b) 0.005 - 10 parts by weight based on component (a) of an epoxy compound of the formula (I):



(wherein Ar is a C₆ - C₂₀ aromatic group or C₆ - C₂₀ is an alicyclic group, n is from 0 to 20 inclusive); and

(c) 1 - 70 parts by weight based on component (a) of at least one elastomer which has at least one functional group selected from epoxy, carboxyl, carboxylate ester, carboxylic acid amide, acid anhydride, imide, carboxylate salt, hydroxyl, amino and cyano groups, the elastomer having a tensile modulus of 1 - 6,000 kg/cm²; and

thereafter melting and stirring the resulting mixture at a temperature 5-50 °C higher than the melting point of the aromatic polyester.

Further, the object of the present invention has been accomplished more advantageously, in terms of the improvement in the weatherability, by optionally incorporating a hindered phenol derivative compound and/or a sulfur-containing ester compound in the aromatic polyester composition.

The aromatic polyester employed in the present invention is a polyester having an aromatic ring in the repeating unit thereof, and is a polymer or a copolymer obtained by the polycondensation reaction chiefly between an aromatic dicarboxylic acid (or an ester-forming derivative thereof) and a diol (or an ester-forming derivative thereof).

Examples of the aromatic dicarboxylic acid herein used include terephthalic acid, isophthalic acid, orthophthalic acid, 1,5-naphthalene dicarboxylic acid, 2,5-naphthalene dicarboxylic acid, 2,6-naphthalene dicarboxylic acid, 2,7-naphthalene dicarboxylic acid, 2,2'-biphenyldicarboxylic acid, 3,3'-biphenyldicarboxylic acid, 4,4'-biphenyldicarboxylic acid, 4,4'-diphenylether dicarboxylic acid, 4,4'-diphenylmethane dicarboxylic acid, 4,4'-diphenylsulfone dicarboxylic acid, 4,4'-diphenylisopropylidene dicarboxylic acid, 1,2-bis(phenoxy)-ethane-4,4'-dicarboxylic acid, 2,5-anthracene dicarboxylic acid, 2,6-anthracene dicarboxylic acid, 4,4''-p-terphenylene dicarboxylic acid and 2,5-pyridine dicarboxylic acid. Terephthalic acid may preferably be used.

Two or more aromatic dicarboxylic acids may be used in combination. One or more aliphatic dicarboxylic acids such as adipic acid, azelaic acid, dodecanedioic acid, sebacic acid and dimer acid; and/or one or more alicyclic dicarboxylic acids such as cyclohexane dicarboxylic acid may be used in combination with the aromatic dicarboxylic acid as long as their amount is small.

Examples of the diol component include aliphatic diols such as ethylene glycol, propylene glycol, butylene glycol, 1,5-pentane diol, hexylene glycol, neopentyl glycol, 2-methyl-1,3-propane diol, diethylene glycol and triethylene glycol; alicyclic diols such as 1,4-cyclohexane dimethanol; as well as mixtures thereof. Small amount of one or more long-chain diols with a molecular weight of 400 - 6,000 - such as polyethylene glycol, polypropylene glycol and polytetramethylene glycol may be copolymerized.

Specific examples of the aromatic polyester include polyethylene terephthalate, polypropylene terephthalate, polybutylene terephthalate, polycyclohexanedimethylene terephthalate, polyethylene naphthalate, polybutylene naphthalate, polyethylene-1,2-bis(phenoxy)ethane-4,4'-dicarboxylate; as well as polyester copolymers such as polyethylene isophthalate/terephthalate, polybutylene terephthalate/isophthalate, polybutylene terephthalate/decanedioic acid and polyethylene terephthalate/4,4'-biphenyl dicarboxylate. Among these, polybutylene terephthalate and polyethylene terephthalate which have well balanced mechanical properties and flowability may preferably be used.

The aromatic polyester which is used in the present invention may have a relative viscosity of 1.10 - 2 and preferably has a relative viscosity of 1.15 - 2.0, more preferably 1.3 - 1.85, at 25 °C when measured as a 0.5% solution in o-chlorophenol. If the relative viscosity of the aromatic polyester is less than 1.15, sufficient mechanical strength cannot be obtained. If the relative viscosity is more than 2.0, a molded article with good surface gloss cannot be obtained.

The epoxy compound employed in the present invention is represented by the above-described formula (I).

Preferred examples of the group Ar include 1,4-phenylene, 1,3-phenylene, 1,2-phenylene, 2-methyl-1,4-phenylene, 4,4'-biphenylene, 3,3'-biphenylene, 2,2'-biphenylene, 3,4'-biphenylene, 1,4-naphthylene, 1,5-naphthylene, 2,6-naphthylene, 2,7-naphthylene, 1,4-cyclohexylene, 1,3-cyclohexylene, 1,2-cyclohexylene, 4,4'-bicyclohexylene and 2,6-decahydronaphthylene. Among these, 1,4-phenylene, 1,3-phenylene and 2,6-naphthylene are especially preferred.

The degree of polymerization "n" in the formula (I) is from 0 to 20 inclusive and may be 0 or an integer of 1 - 20, preferably 0 or 1 - 10. The epoxy compound may be a mixture of compounds with various degrees of polymerization

The process for preparation of the epoxy compound represented by the formula (I) is not restricted. For example, it may be obtained by reacting a hydroxycarboxylic acid with an epihalohydrin under the presence of a catalyst such as a quaternary ammonium salt, tertiary amine and tertiary phosphine at 40 °C to 150 °C to halohydrin ester-etherify the hydroxycarboxylic acid and then adding an alkaline metal salt to eliminate

hydrogen halide from the reaction product. Epoxy compounds with high degree of polymerization may be obtained by reacting the hydroxycarboxylic acid at varying ratios in the presence of a catalyst.

The content of the epoxy compound in the composition of the present invention is 0.005 to 10 parts by weight, preferably 0.05 - 5 parts by weight, and more preferably 0.2 - 3 parts by weight with respect to 100 parts by weight of the polyester. If the content of the epoxy compound is less than 0.005 parts by weight, the improvement in the hydrolysis stability is not sufficient, and if the content of the epoxy compound is more than 10 parts by weight, the mechanical properties of the aromatic polyester resin are degraded.

The elastomer employed in the present invention, which has at least one functional group selected from epoxy, carboxyl, carboxylate ester, carboxylic acid amide, acid anhydride, imide, carboxylate salt, hydroxyl, amino and cyano groups, which has a tensile modulus of 1 - 6,000 kg/cm² may be any elastomer which has, in any form in its molecular chain, at least one functional group selected from epoxy, carboxyl, carboxylate ester, carboxylic acid amide, acid anhydride, imide, carboxylate salt hydroxyl, amino and cyano groups, and which has a tensile modulus of 1 - 6,000 kg/cm². It should be noted, however, those elastomers having a glass transition temperature of not higher than 0 °C are preferred. Further, those elastomers having a tensile modulus of 5 - 2,000 kg/cm² are preferred.


The elastomer employed in the present invention preferably has an MI (melt index) of 0.1 - 100, more preferably 0.5 - 30. If the MI is outside the above range, the improvement in the resistance to thermal cycling of the polyester composition is small, so that it is not preferred. The MI herein means that determined in accordance with ASTM D-1238 (measured at 190 °C) and is expressed in terms of g/10 minutes.

The content of the elastomer is 1 - 70 parts by weight, preferably 2 - 50 parts by weight, for example, 3 - 40 parts by weight, with respect to 100 parts by weight of the aromatic polyester. If the content of the elastomer is less than 1 part by weight, the improvement in the impact strength of the aromatic polyester composition is not sufficient. If the content of the elastomer is more than 70 parts by weight, the flowability of the resin composition is lowered.

Preferred examples of the elastomer employed in the present invention include the following (i) - (iv).

- (i) glycidyl group-containing copolymers of an α -olefin and a glycidyl ester of an α , β -unsaturated acid;
- (ii) modified ethylene-based copolymers obtained by graft-copolymerizing an ethylene-based polymer with 0.01 to 10% by weight of an unsaturated carboxylic acid or a derivative thereof;
- (iii) ethylene-based random copolymers of ethylene and an unsaturated carboxylic acid or a derivative thereof;
- (iv) acrylic polymers which may or may not contain a diene-based polymer; and
- (v) conjugated diene-based polymers having at least one functional group selected from hydroxyl, carboxylic, acid anhydride, amino and cyano groups.

Examples of the α -olefin in the glycidyl group-containing copolymers (i) of an α -olefin and a glycidyl ester of an α , β -unsaturated acid include ethylene, propylene, butene-1 and octene-1, and ethylene may preferably be used. The glycidyl ester of an α , β -unsaturated acid means a compound represented by the general formula:



(wherein R is hydrogen, a lower alkyl group or lower alkyl group substituted with a glycidyl ester group). Examples of the compound include glycidyl acrylate, glycidyl methacrylate, glycidyl ethacrylate and glycidyl itaconate. Among these, glycidyl methacrylate and glycidyl acrylate may preferably be used.

The glycidyl group-containing copolymer may be copolymerized with one or more other copolymerizable monomers, for example, vinyl ethers, vinyl esters such as vinyl acetate, vinyl cyanates, aromatic vinyls, carbon monoxide and unsaturated monomer esters, in particular, C₁ - C₁₀ alkyl acrylate and C₁ - C₁₀ alkyl methacrylate.

The content of the copolymerized glycidyl ester of the α , β -unsaturated acid in the glycidyl group-containing copolymer is preferably 0.1 - 50% by weight, more preferably 1 - 25% by weight of the glycidyl group-containing copolymer. If the content of the copolymerized glycidyl ester is less than 0.1% by weight, the improvement in the mechanical properties of the polyester composition is small, and if the content is more than 50% by weight, the flowability during molding is decreased.

Preferred examples of the glycidyl group-containing copolymers include ethylene/glycidyl methacrylate copolymers, ethylene/vinyl acetate/glycidyl methacrylate copolymers, ethylene/glycidyl acrylate copolymers,

ethylene/ethyl acrylate/glycidyl methacrylate copolymers, ethylene/vinyl acetate/glycidyl acrylate copolymers and ethylene/glycidyl acrylate/butyl acrylate copolymers. Ethylene/glycidyl methacrylate copolymers are most preferred.

The modified ethylene-based copolymers (ii) obtained by graft copolymerizing an ethylene-based polymer with a 0.01 to 10% by weight of an unsaturated carboxylic acid or a derivative thereof are preferably those obtained by graft-copolymerizing an unmodified ethylene-based copolymer with 0.01 - 10% by weight of an unsaturated carboxylic acid or a derivative thereof.

Preferred examples of the unmodified ethylene-based copolymer employed as the stem polymer include the following (A) to (E) :

(A) Copolymers of ethylene and an α -olefin such as propylene and/or butene-1. Examples thereof include ethylene/propylene copolymers, ethylene/butene-1 copolymers and ethylene/pentene-1 copolymers.

(B) Copolymers of ethylene, propylene and/or butene-1 and a $C_6 - C_{20}$ non-conjugated diene. Examples of the non-conjugated diene include 1,4-hexadiene, dicyclopentadiene and ethylidene norbornane. Examples of the copolymer include ethylene/propylene/ethylidene norbornane copolymers, ethylene/propylene/dicyclopentadiene copolymers and ethylene/butene-1/ethylidene norbornane copolymers.

(C) Copolymers of ethylene and $C_1 - C_{10}$ alkyl acrylate or $C_1 - C_{10}$ alkyl methacrylate. Examples of these copolymers include ethylene/ethyl acrylate copolymers, ethylene/methyl acrylate copolymers, ethylene/methyl methacrylate copolymers, and ethylene/butyl acrylate copolymers.

(D) Copolymers of ethylene and saponified or non-saponified vinyl acetate. Examples of these copolymers include ethylene/vinyl acetate copolymers, partially saponified ethylene/vinyl acetate copolymers, and saponified ethylene/vinyl acetate copolymers (ethylene/vinyl alcohol copolymers).

(E) Hydrogenated styrene-butadiene block copolymers or hydrogenated styrene-isoprene block copolymers. Examples of these copolymers include hydrogenated styrene-isoprene-styrene ternary block copolymers, and hydrogenated styrene-butadiene block copolymers.

The unsaturated carboxylic acid which is graft-copolymerized with the ethylene-based copolymer may preferably be a $C_3 - C_{40}$, more preferably $C_3 - C_{20}$, unsaturated carboxylic acid. Examples thereof include acrylic acid, methacrylic acid, crotonic acid, maleic acid, fumaric acid, itaconic acid, 5-norbornene-2,3-dicarboxylic acid, tetrahydrophthalic acid, dimer acid, and methylenedimethylene tetrahydrophthalic acid (also known as methyl-5-norbornene-2,3-dicarboxylic acid). Examples of the derivatives of the unsaturated carboxylic acid include anhydrides, esters (especially glycidyl esters), amides, imides and metal salts of the above-mentioned unsaturated carboxylic acids.

In particular, preferred examples of the unsaturated carboxylic acid or the derivative thereof include acrylic acid, methacrylic acid, maleic anhydride, itaconic anhydride, tetrahydrophthalic anhydride, glycidylacrylate, glycidylmethacrylate, diglycidyl maleate, diglycidyl tetrahydrophthalate, diglycidyl dimerate, acrylamide, methacrylamide, maleic imide, N-phenylmaleic imide, and sodium methacrylate.

The method of graft-copolymerizing the ethylene-based copolymer with the unsaturated carboxylic acid or the derivative thereof is not restricted. The graft-copolymerization may be accomplished, for example, by dissolving the ethylene-based copolymer in a solvent such as benzene and toluene under heat and adding thereto the unsaturated carboxylic acid and/or the derivative thereof and a radical initiator; or by melt-compounding the ethylene-based copolymer, the unsaturated carboxylic acid and/or the derivative thereof and the radical initiator using an extruder or a kneader. When the unsaturated carboxylic acid and/or the unsaturated carboxylic acid anhydride is graft-copolymerized, the resulting copolymer may be treated with an appropriate amount of a metal compound to form a metal salt of the carboxylic acid.

The content of the unsaturated carboxylic acid or the derivative thereof to be graft-copolymerized is 0.01 - 10% by weight, preferably 0.1 - 3% by weight with respect to the modified ethylene copolymer. If the grafting is less than 0.01% by weight, the improvement in the impact strength of the aromatic polyester is not sufficient, and if the content is more than 10% by weight, the flowability of the resin composition during molding is degraded.

Preferred examples of the unsaturated carboxylic acid constituting the ethylene-based random copolymers (iii) of ethylene and an unsaturated carboxylic acid or a derivative thereof include $C_3 - C_{20}$ unsaturated carboxylic acids. Specific examples thereof include acrylic acid, methacrylic acid, crotonic acid, maleic acid, fumaric acid, itaconic acid, 5-norbornene-2,3-dicarboxylic acid, tetrahydrophthalic acid, dimer acid and methylenedimethylenetetrahydrophthalic acid. Among these, acrylic acid and methacrylic acid are especially preferred. Preferred examples of the derivative of the unsaturated carboxylic acid include metal salts such as lithium, sodium, potassium, magnesium, barium, zinc, aluminum and calcium salt; and $C_1 - C_8$ alkyl esters of the unsaturated carboxylic acid. Preferred examples of the ethylene-based random copolymer include ethylene/methyl acrylate copolymers, ethylene/ethyl acrylate copolymers, ethylene/butyl

acrylate copolymers, ethylene/methyl methacrylate copolymers, ethylene/ethyl methacrylate copolymers, ethylene/acrylic acid copolymers and 0 - 100% neutralized sodium or zinc salt thereof, ethylene/methacrylic acid copolymers and 0 - 100% neutralized sodium or zinc salt thereof, and ethylene/butyl acrylate/methacrylic acid copolymers and 0 - 100% neutralized sodium or zinc salt thereof.

5 The acrylic polymer which may or may not contain a diene-based polymer (iv) is preferably one obtained by graft-copolymerizing one or more unsaturated monomers selected from aromatic monovinyl compounds, vinyl cyanate derivatives, (meth)acrylic acid and (meth)acrylate compounds, with a graft base of polyacrylate which may contain the diene-based polymer.

10 Examples of the polyacrylic graft base include acrylate polymers and copolymers which may contain a diene-based rubber nucleus such as polybutadiene, the acrylate being particularly preferably the major constituent. Preferred graft bases in general contain not less than 40% by weight, more preferably not less than 60% by weight of acrylate. As the acrylate, esters of acrylic acid with C₁ - C₈ monovalent alcohols such as methyl, ethyl, propyl, hexyl, 2-ethyl hexyl and octyl alcohol are preferred.

15 The graft base may be copolymerized with a crosslinkable monomer. Examples of the crosslinkable monomer include esters of C₃ - C₈ unsaturated carboxylic acid with C₃ - C₁₂ unsaturated monovalent alcohol (e.g., allyl methacrylate); heterocyclic compounds containing a plurality of unsaturated groups (e.g., triallyl cyanurate, triallyl isocyanurate and tris-acryloyl-S-triazine); polyfunctional vinyl compounds (e.g., di- and tri-vinyl benzene), triallyl phosphate and diallyl phthalate. Among these, allyl methacrylate, ethylene dimethacrylate, diallyl phthalate, triallyl isocyanurate, triallyl cyanurate, triacryloyl hexahydro-S-triazine and 20 triallyl benzene are preferred. The content of the crosslinkable monomer is preferably 0.02 - 5% by weight with respect to the graft base.

The vinyl monomer which is grafted to the polyacrylic graft base may be at least one member selected from aromatic vinyl compounds, cyanated vinyl compounds and (meth)acrylate compounds. Preferred are 25 α -methyl styrene, styrene, acrylonitrile, methyl methacrylate, glycidyl methacrylate and glycidyl acrylate, as well as mixtures thereof. The above-mentioned crosslinkable monomers may be copolymerized in combination with the graft component. The acrylic polymer may be of any structure, and may preferably be a multi-step polymer of so called core-shell type.

30 As the above-mentioned rubbery copolymer, those commercially available such as sold under the trade names of "Acryloid" (commercially available from Rohm and Haas Co.), "Kane-Ace" (commercially available from Kanegafuchi Chemical Industry Co., Ltd.), "Blendix" (commercially available from Vorg-Warner Co., Ltd.), and "BTA" and "HIA" (commercially available from Kureha Chemical Industry Co., Ltd.) may also be used.

35 The conjugated diene-based polymers (v) having at least one functional group selected from hydroxyl, carboxylic acid anhydride, amino and cyano groups may be obtained by graft-copolymerizing or random-copolymerizing an unsaturated monomer having the above-mentioned functional group with the conjugated diene-based polymer.

40 The conjugated diene-based polymer used as the base of the graft-copolymerization may be a polymer obtained by polymerizing a conjugated diene-based monomer such as butadiene, isoprene and cyclopentadiene, as well as a copolymer obtained by copolymerizing the conjugated diene-based monomer with a copolymerizable monomer such as aromatic vinyls such as styrene, cyanated vinyls such as acrylonitrile, and acrylates such as ethylacrylate or methylmethacrylate.

Examples of the conjugated diene-based polymer include polybutadiene, butadiene/styrene copolymers, butadiene/acrylonitrile copolymers, styrene/butadiene block copolymers and styrene/isoprene block copolymers.


45 The monomer to be graft-copolymerized with the conjugated diene-based polymer may be any monomer as long as it has a hydroxyl group, carboxyl group, acid anhydride group, amino group or cyano group. Preferred examples of the monomer include methacrylic acid, acrylic acid, maleic anhydride, acrylamide, methacrylamide and acrylonitrile.

50 Preferred examples of the copolymer include butadiene/acrylonitrile copolymers, butadiene/styrene/acrylonitrile copolymers, butadiene/acrylonitrile/acrylic acid copolymers, butadiene/styrene-g-methylmethacrylate/styrene copolymers, styrene/butadiene-g-maleic anhydride copolymers and styrene/isoprene-g-maleic anhydride copolymers.

Among the above-described elastomers (i) - (v), more preferred are (i), (ii), (iii) and (iv), especially (i) and (ii). These elastomers may be used individually or in combination.

55 Although not essential, the weatherability of the polyester composition may further be promoted by blending therein a hindered phenol derivative and/or a sulfur-containing ester compound.

Preferred examples of the hindered phenol compound which may be used in the present invention are those having a structural unit represented by the following formula (II):



(II)

(wherein R_1 represents a $C_1 - C_{10}$ alkyl group such as methyl, ethyl, propyl and t-butyl group).

Those having a molecular weight of not less than 500 are preferred. Specific examples of the hindered phenol compound include triethylene glycol-bis-3-(3'-t-butyl-4'-hydroxy-5-methylphenyl) propionate, 1,3,5-tris(3',5'-di-t-butyl-4'-hydroxybenzoyl) isocyanurate,

1,3,5-trimethyl-2,4,6-tris(3',5'-di-t-butyl-4'-hydroxybenzyl) benzene, hexamethylene glycol-bis- β -(3,5-di-t-butyl-4-hydroxy-phenyl) propionate], 6-(4'-hydroxy-3',5'-di-t-butylanilino)-2,4-bis-octylthio-1,3,5-triazine, tetrakis[methylene-3(3',5'-di-t-butyl-4'-hydroxy-phenyl)propionate] methane, 2,2'-thio[diethyl-bis-3(3',5'-di-t-butyl-4'-hydroxyphenyl)propionate],


n-octadecyl-3-(4'-hydroxy-3',5'-di-t-butylphenol)propionate,

N,N'-hexamethylene-bis-3-(3',5'-di-t-butyl-hydroxy-propamide), 1,3,5-tris(3',5'-di-t-butyl-4'-hydroxybenzyl)-isocyanurate, 3,5-di-t-butyl-4-hydroxy-benzyl phosphoric acid dimethyl ester and bis(3,5-di-t-butyl-4-hydroxy-benzyl phosphoric acid) monomethyl ester nickel salt. Among these,

n-octadecyl-3-(4'-hydroxy-3',5'-di-t-butylphenol) propionate,

tetrakis[methylene-3(3',5'-di-t-butyl-4'-hydroxy-phenyl) propionate] methane and triethylene glycol-bis-3-(3'-t-butyl-4'-hydroxy-5-methylphenyl) propionate are preferred.

The sulfur-containing ester compounds which may be used in the present invention are esters containing at least one sulfur atom in the molecule. Preferred examples of the ester compounds may be represented by the following formulae (III) and (IV).



(wherein each of R_2 and R_4 independently represents a $C_1 - C_{10}$ alkylene group, each of R_3 and R_5 independently represents a $C_3 - C_{40}$ alkyl group)

Preferred examples of R_2 and R_4 include methylene, ethylene, propylene, butylene and hexylene groups. Preferred examples of R_3 and R_5 include octyl, decyl, lauryl, dodecyl, myristyl and stearyl groups.

Specific examples of the sulfur-containing compounds include dioctylthiodipropionate, didodecylthiodipropionate, dodecylstearylthiodipropionate, distearylthiodipropionate, dimyristylthiodipropionate, ditridecylthiodipropionate, didodecyl β , β' -thiodibutylate, distearyl- β , β' -thiodibutylate, pentaerythritol-tetrakis(dodecylthiopropionate), pentaerythritol-tetrakis(dodecylthioacetate), pentaerythritol-tetrakis(dodecylthiobutylate) and pentaerythritol-tetrakis(octadecylthiopropionate). Among these, didodecylthiodipropionate, distearylthiodipropionate, distearyl- β , β' -thiodibutylate and pentaerythritol-tetrakis(dodecylthiopropionate) are preferred.

The total content of the hindered phenol derivative and/or the sulfur-containing ester compound may be 0.01 - 5 parts by weight, preferably 0.05 - 3 parts by weight, more preferably 0.05 - 0.5 parts by weight with respect to 100 parts by weight of the polyester. By incorporating the hindered phenol derivative and/or sulfur-containing ester compound in the polyester composition in the amount as mentioned above, the properties of the composition of the present invention may be promoted, and the weatherability is also improved.

Although not essential, the rigidity of the composition of the present invention may greatly be promoted without degrading other properties by incorporating in the composition a fibrous and/or granular filler.

By incorporating a filler, the resistance to thermal cycling is further promoted due to the synergistic effect of the epoxy compound and the elastomer.

Examples of the filler include glass fibers, carbon fibers, metal fibers (e.g., stainless steel fibers), aramide fibers, asbestos, potassium titanate whiskers, wallastonite, glass flakes, glass beads, talc, mica, clay, sepiolite, calcium carbonate, barium sulfate, barium carbonate titanium oxide, aluminum oxide and

gypsum fibers. Among these, glass fibers of the chopped strand type are especially preferred. The content of the filler is usually not more than 50 parts by weight with respect to 100 parts by weight of the aromatic polyester composition.

The aromatic polyester composition of the present invention may further contain one or more of the conventional additives such as antioxidants, heat stabilizers, ultraviolet absorbers, lubricants, mold releasing agents, dyes, colorants including pigments and nucleating agents.

Although the preparation process of the composition of the present invention is not restricted, the composition may preferably be prepared by (a) melt-compounding the three components, i.e., aromatic polyester, the elastomer and the epoxy compound at a temperature higher than the melting point of the aromatic polyester using an extruder, or (b) by blending in a dry state the aromatic polyester, the epoxy compound and the elastomer and thereafter melting and stirring the resulting mixture at a temperature 5-50°C higher than the melting point of the aromatic polyester or (c) by adding the two components at the end of the polymerization of the aromatic polyester.

In cases where the fibrous and/or granular filler is incorporated, an aromatic polyester composition with extremely great resistance to thermal cycling may be obtained by first melt-mixing the aromatic polyester, the epoxy compound represented by the formula (I) and the fibrous and/or granular filler, and then melt-mixing the elastomer therewith.

Although the preparation process in this case is not restricted, a process in which the three components, i.e., the aromatic polyester compound, the epoxy compound and the fibrous and/or granular filler are first melt-mixed using an extruder to pelletize the resulting mixture, and then the pellets and the elastomer are melted and mixed using an extruder; or a process in which the three components are fed into an extruder from the hopper which is farthestmost from the extrusion die and the elastomer is fed from the hopper nearest from the extrusion die, may preferably be employed.

The resin composition of the present invention may easily be molded by the conventional methods such as injection molding and extrusion molding, and the resulting molded article has excellent properties.

The effects of the present invention will further be described by way of examples and comparative examples thereof. These examples are presented for the illustration purpose only and the scope of the invention is not limited thereto.

Examples 1 - 20, Comparative Examples 1 - 13

One hundred parts by weight of a polybutylene terephthalate with a relative viscosity of 1.65, the elastomer (A-1) to (A-19) listed in Table 1, the epoxy compound (B-1) to (B-6) listed in Table 2, were dry-blended using a V-blender in the mixing ratio shown in Table 3, and the resulting blend was melt-compounded, and pelletized using a 30 mm ϕ twin screw extruder. The obtained pellets were fed in a 5-ounce injection molder of screw-in-line type. Setting the cylinder temperature to 250°C, mold temperature to 90°C, and the molding cycle (injection time/cooling time/interval time) to 15 seconds/20 seconds/10 seconds (hereinafter referred to as molding cycle [A]), ASTM-1 dumbbell and Izod impact test pieces with 1/4 inch width were obtained and the minimum injection pressure (guage pressure) which is the minimum pressure required to feed the resin in the mold cavity was determined. The smaller this value, the greater the flowability of the composition during molding. If this value sharply decreases after long period of residence, it means that the residence stability is poor.

To determine the influence by the residence time on molding, test samples were obtained in the same manner as described above except that the molding cycle (injection time/cooling time/interval time) was 15 seconds/20 seconds/900 seconds (hereinafter referred to as molding cycle [B]).

The obtained test samples were treated with boiling water at a temperature of 100°C for 15 days.

The resulting test samples were subjected to tensile test in accordance with ASTM D-638, and to Izod impact test in accordance with ASTM D-256.

Table 1

Elastomer No.	MI (g/10 min)	Tg (°C)	Tensile Modulus (kg/cm ²)	Elastomer Composition
A-1	3.0	-22	900	E/GMA (90/10 (wt/wt))
A-2	2.5	-24	750	E/VAC/GMA (80/10/10 (wt/wt))
A-3	3.2	-45	150	E/P-g-MAH (74/26) (mol/mol) -g- 1.5 (wt ratio)
A-4	3.4	-35	100	E/B-g-GMA (76/14 (mol/mol) -g-3.2 (wt ratio)
A-5	16	-18	250	E/EA-g-MAH (72/28-g-1.5 (wt ratio))
A-6	1.2	-39	75	SEBS-g-MAH (styrene content 13%, -g- 1.5 wt%)
A-7	6.4	-32	300	E/P-g-AAM (82/18-g-2.0 (wt ratio))
A-8	16	-30	400	E/EA (68/32 (wt/wt))
A-9	7	-8	850	E/AA (82/18 (wt/wt))
A-10	0.7	-19	1200	80% zinc-neutralized E/MA/IBA (75/15/10 (wt ratio)
A-11	16	-37	650	BA/EDM/MMA/ST (69.5/0.5//16/14 (wt ratio)

Table 1 (continued)

Elastomer No.	MI (g/10 min)	Tg (°C)	Tensile Modulus (kg/cm ²)	Elastomer Composition
A-12	17	-55	340	BD/ST/MMA/DVB//ST//MMA/BDM (71/3/4/1//11//11//0.1, (wt ratio))
A-13	27	-18	970	BD/MMA (70/30 (wt/wt))
A-14	45	-6	1050	BD/AN/AA (72/26/2 (wt ratio))
A-15	3.2	-49	100	E/P (74/26 (mol/mol))
A-16	7.5	-45	50	SEBS (styrene content 138)
A-17	16	-19	430	ST/BD (30/70 (wt/wt))
A-18	6	-1	7400	E/P-g-GMA (10/90 - 2 (wt ratio))
A-19	25	+16	760	BMA/GMA (98/2 (wt/wt))

Abbreviation:

E: ethylene, GMA: glycidyl methacrylate, VAC: vinyl acetate, P: propylene, MAH: maleic anhydride, EA: ethyl acrylate, SEBS: hydrogenated styrene-butadiene-styrene triblock copolymer, AAM: acrylamide, AA: acrylic acid, MA: methacrylic acid, IBA: isobutylacrylate, BA: n-butyl acrylate, EDM: ethylene dimethacrylate, MMA: methyl methacrylate, BMA: n-butyl methacrylate, ST: styrene, BD: butadiene, DVB: divinyl benzene, BDM: butylene dimethacrylate, AN: acrylonitrile, /: copolymer, -g-: graft, //: surface graft, Tg: glass transition temperature

Table 2


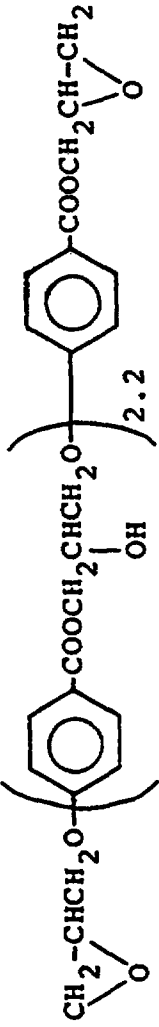
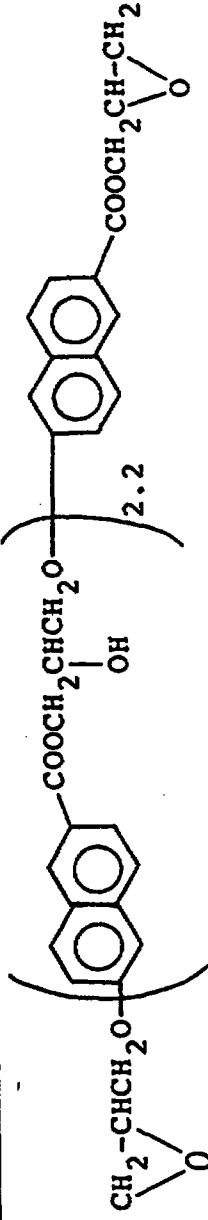
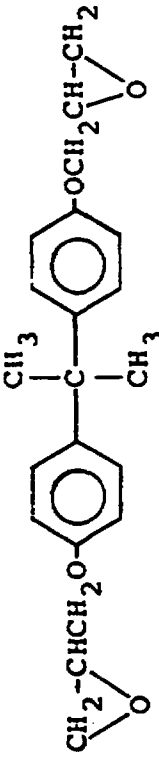
Epoxy Compound No.	Structure
B-1	
B-2	
B-3	
B-4	

Table 2 (continued)



Epoxy Compound No.	Structure
B-5	
B-6	

Table 3

Example No.	Elastomer		Epoxy Compound		Molding Cycle [A]				
	No.	Amount (parts by wt)	No.	Amount (parts by wt)	Minimum Injection Pressure (kg/cm ²)	Non-Treated Article		Boiling Water-Treated Article	
						Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)
1	A-1	20	B-1	0.5	49	395	59	365	48
2	A-1	20	B-1	1.0	47	400	60	380	52
3	A-1	20	B-1	2.0	43	405	62	395	53
4	A-1	20	B-2	1.0	46	395	57	385	51
5	A-1	20	B-3	1.0	47	410	62	395	53
6	A-2	20	B-1	1.0	50	425	65	405	51
7	A-3	20	B-1	1.0	50	420	62	385	51
8	A-4	20	B-1	1.0	47	395	62	385	55
9	A-5	5	B-1	1.0	39	440	19	425	15
10	A-5	20	B-1	1.0	47	400	72	390	60
11	A-5	35	B-1	1.0	54	360	>90	355	78
12	A-6	20	B-1	1.0	54	420	80	395	62

Table 3 - 2

Example No.	Elastomer No.	Amount (parts by wt)	Epoxy Compound		Molding Cycle [A]				Boiling Water-Treated Article	
					Minimum Injection Pressure (kg/cm ²)	Non-Treated Article Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	Impact Strength (kg·cm/cm)		
13	A-7	20	B-1	1.0	47	385	59	375	55	
14	A-8	20	B-1	1.0	42	410	48	405	39	
15	A-9	20	B-1	1.0	53	420	57	380	41	
16	A-10	20	B-1	1.0	54	405	53	395	39	
17	A-11	20	B-1	1.0	40	385	39	375	28	
18	A-12	20	B-1	1.0	42	375	42	370	31	
19	A-13	20	B-1	1.0	43	375	45	355	29	
20	A-14	20	B-1	1.0	45	380	39	350	32	
Comp. Ex. 1	A-15	5	B-1	1.0	59	250	6.0	170	5.5	
Comp. Ex. 2	A-16	20	B-1	1.0	57	235	5.0	185	5.0	
Comp. Ex. 3	A-17	20	B-1	1.0	56	320	12.5	295	11.5	

Table 3 - 3

Example No.	Elastomer		Epoxy Compound		Molding Cycle [A]				
	No.	Amount (parts by wt)	No.	Amount (parts by wt)	Minimum Injection Pressure (kg/cm ²)	Non-Treated Article		Boiling Water-Treated Article	
						Tensile Strength (kg/cm ²)	Impact Strength (kg.cm/cm)	Tensile Strength (kg/cm ²)	Impact Strength (kg.cm/cm)
Comp. Ex. 4	A-18	20	B-1	1.0	62	420	13.5	285	4.5
Comp. Ex. 5	A-19	20	B-1	1.0	52	430	6.5	395	6.5
Comp. Ex. 6	A-5	20	B-4	1.0	48	350	45	270	10.5
Comp. Ex. 7	A-5	20	B-5	1.0	120	380	35	275	13.5
Comp. Ex. 8	A-5	20	B-6	1.0	52	350	40	260	9.0
Comp. Ex. 9	A-5	20	B-4 B-5	0.5 0.5	80	395	42	265	17.5
Comp. Ex. 10	A-5	20	B-1	0.001	51	350	44	265	12.0
Comp. Ex. 11	A-5	20	B-1	15	26	120	4.0	75	4.0
Comp. Ex. 12	A-5	0.1	B-1	1.0	37	550	4.5	250	4.0
Comp. Ex. 13	A-5	100	B-1	1.0	85	165	>90	155	35

Table 3 - 4

Example No.	Molding Cycle [B]			
	Minimum Injection Pressure (kg/cm ²)	Non-Treated Article		Impact Strength (kg·cm/cm)
		Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	
1	51	390	53	29
2	48	405	57	34
3	43	400	58	36
4	47	405	45	42
5	49	405	47	41
6	48	390	42	30
7	48	405	49	41
8	49	400	56	32
9	40	435	14	12
10	45	380	61	50
11	51	370	>90	62
12	51	395	51	39

Table 3 - 5

Example No.	Molding Cycle [B]				
	Minimum Injection Pressure (kg/cm ²)	Non-Treated Article		Boiling Water-Treated Article	
		Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)
13	46	370	53	360	42
14	42	395	42	360	36
15	42	375	39	330	29
16	59	420	52	370	42
17	38	370	29	355	18
18	37	360	27	350	16
19	38	345	27	340	21
20	37	335	27	320	23
Comp. Ex. 1	55	165	5.0	145	4.0
Comp. Ex. 2	56	160	4.5	155	4.5
Comp. Ex. 3	37	175	6.0	170	4.0

Table 3 - 6

Example No.	Molding Cycle [B]				
	Minimum Injection Pressure (kg/cm ²)	Non-Treated Article		Boiling Water-Treated Article	
		Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)
Comp. Ex. 4	59	355	9.5	225	4.0
Comp. Ex. 5	42	370	5.5	350	5.0
Comp. Ex. 6	49	335	35	225	8.5
Comp. Ex. 7	145	395	32	275	7.5
Comp. Ex. 8	42	280	17	190	13.5
Comp. Ex. 9	92	380	12.5	225	5.5
Comp. Ex. 10	47	330	7.5	195	4.5
Comp. Ex. 11	85	720	2.0	240	1.5
Comp. Ex. 12	37	545	4.0	230	3.0
Comp. Ex. 13	95	105	>90	85	13.5

Examples 21 - 27, Comparative Examples 14 - 17

Using 100 parts by weight of a polybutylene terephthalate with a relative viscosity of 1.45, 20 parts by weight of glass fibers (3 mm length, chopped strand type), elastomer (A-1) or (A-5) and epoxy compound (B-1) or (B-4), in the amount shown in Table 4, melt-mixing and molding were conducted as in Example 1.

The ASTM-1 dumbbells obtained through molding cycle [A] were subjected to a heat cycling test in which thermal shock of 150 thermal cycles consisting of 150°C for 2 hours and -40°C for 2 hours was given.

5 The ASTM-1 dumbbells obtained through molding cycle [A] were treated using Sunshine Weatherometer under the conditions of arc current of 50 A/arc voltage of 80 V, rain 12 minutes/cycle 60 minutes/room temperature of 90°C, for 40 days.

10 Further, test samples obtained in the same manner as in Example 1 except that the aromatic polyester was polyethylene terephthalate with a relative viscosity of 1.35 (extrusion and molding temperature of 285°C, mold temperature in molding of 120°C) (Example 26) and test samples obtained in the same manner as in Example 1 except that the aromatic polyester was polycyclohexanedimethylene terephthalate with a relative viscosity of 1.42 (extrusion and molding temperature of 300°C, mold temperature in molding of 120°C) (Example 27) were also tested in the same manner as described above. The results are shown in Table 4 in summary.

15

20

25

30

35

40

45

50

55

Table 4

Example No.	Aromatic Polyester	Elastomer		Epoxy Compound		Molding Cycle [A]		
		No.	Amount (parts by wt)	No.	Amount (parts by wt)	Minimum Injection Pressure (kg/cm ²)	Non-Treated Article Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)
21	PBT	A-1	3	B-1	1.0	62	915	13.0
22	PBT	A-1	10	B-1	1.0	58	865	15.5
23	PBT	A-1	20	B-1	1.0	64	825	17.5
24	PBT	A-5	10	B-1	0.5	51	845	15.0
25	PBT	A-5	10	B-1	1.0	49	840	15.5
26	PET	A-1	10	B-1	0.5	32	975	16.5
27	PCT	A-1	10	B-1	0.5	37	1015	15.5
Comp. Ex. 14	PBT	A-1	0.1	B-1	1.0	64	1035	7.0
Comp. Ex. 15	PBT	A-1	10	B-1	0.001	59	870	14.0
Comp. Ex. 16	PPT	A-1	10	B-4	1.0	58	875	13.5

Table 4 - 2

Example No.	Molding Cycle [A]			
	Boiling Water-Treated Article		Heat Cycle-Treated Article	Weatherometer-Treated Article
	Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	Tensile Strength (kg/cm ²)	Tensile Strength (kg/cm ²)
21	860	11.5	830	835
22	805	12.0	670	740
23	695	13.5	725	730
24	735	13.5	660	680
25	775	14.0	720	720
26	895	15.5	885	880
27	960	13.5	865	775
Comp. Ex. 14	965	6.5	320	855
Comp. Ex. 15	395	9.5	315	555
Comp. Ex. 16	405	5.5	410	575

Table 4 - 3

Example No.	Molding Cycle [B]				
	Minimum Injection Pressure (kg/cm ²)	Non-Treated Article Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	Boiling Water-Treated Article Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)
21	63	890	12.5	850	11.5
22	59	855	14.5	835	11.0
23	62	830	17.0	805	11.5
24	54	825	14.5	800	11.0
25	52	835	15.5	825	12.0
26	30	930	13.5	885	11.0
27	27	835	12.5	805	10.5
Comp. Ex. 14	63	930	6.5	885	5.5
Comp. Ex. 15	59	865	13.5	375	5.0
Comp. Ex. 16	58	875	13.5	395	4.5


[Abbreviation]

PBT: polybutylene terephthalate, PET: polyethylene terephthalate,
 PCT: polycyclohexanedimethyl terephthalate

Examples 28 - 30

Melt-mixing, molding and evaluation of the properties of the resulting products were conducted as in Example 21 using 100 parts by weight of polybutylene terephthalate with a relative viscosity of 1.45, 20

parts by weight of glass fibers (3 mm length, chopped strand type), 10 parts by weight of elastomer (A-1), 1.0 part by weight of epoxy compound (B-1), and the following hindered phenol compound (C-1) and/or the following sulfur-containing ester compound (C-2) in the amount shown in Table 5. The results are shown in Table 5.

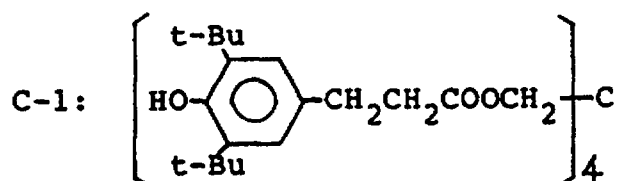

C-2: $S(CH_2CH_2COOC_{12}H_{25})_2$

Table 5

Example No.	Additives (parts by wt)	Molding Cycle [A]			
		Minimum Injection Pressure (kg/cm ²)	Non-Treated Article Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	Boiling Water-Treated Article Impact Strength (kg·cm/cm)
28	C-1 (0.2)	56	885	16.0	14.5
29	C-1 (0.2)	55	870	16.0	15.5
30	C-1 (0.2) C-2 (0.2)	53	890	16.5	15.5

Table 5 - 2

Example No.	Molding Cycle [A]	
	Heat Cycle-Treated Article	Weatherometer-Treated Article
	Tensile Strength (kg/cm ²)	Tensile Strength (kg/cm ²)
28	745	820
29	740	825
30	755	830

Table 5 - 3

Example No.	Molding Cycle [B]			
	Minimum Injection Pressure (kg/cm ²)	Non-Treated Article		Boiling Water-Treated Article Impact Strength (kg·cm/cm)
		Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	
28	56	880	15.0	815
29	54	870	15.5	830
30	52	895	16.0	855

Claims

1. A polyester composition comprising:
 - (a) 100 parts by weight of an aromatic polyester;



Table 5 - 3


Example No.	Molding Cycle [B]				
	Minimum Injection Pressure (kg/cm ²)	Non-Treated Article		Boiling Water-Treated Article	
		Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)	Tensile Strength (kg/cm ²)	Impact Strength (kg·cm/cm)
28	56	880	15.0	815	13.5
29	54	870	15.5	830	13.0
30	52	895	16.0	855	13.5

Claims

1. A polyester composition comprising:
 - (a) 100 parts by weight of an aromatic polyester;



(b) 0.005 - 10 parts by weight based on component (a) of an epoxy compound of the formula (I):



(wherein Ar is a C₆ - C₂₀ aromatic group or C₆ - C₂₀ alicyclic group, n is from 0 to 20 inclusive); and
(c) 1 - 70 parts by weight based on component (a) of at least one elastomer which has at least one functional group selected from epoxy, carboxyl, carboxylate ester, carboxylic acid amide, acid anhydride, imide, carboxylate salt, hydroxyl, amino and cyano groups, the elastomer having a tensile modulus of 1 - 6,000 kg/cm².

2. The composition of claim 1, wherein the aromatic polyester has a relative viscosity of 1.10 - 2.0 at 25 °C when measured as a 0.5% solution in o-chlorophenol.
3. The composition of claim 1 or 2, wherein the aromatic polyester is a polyalkylene terephthalate.
4. The composition of claim 1 or 2, wherein the aromatic polyester is a polycyclohexanedimethylene terephthalate.
5. The composition of claim 3, wherein the polyalkylene terephthalate is polybutylene terephthalate or polyethylene terephthalate.
6. The composition of any preceding claim, wherein Ar in the formula (I) is a phenylene group, biphenylene group or naphthylene group.
7. The composition of any of claims 1 to 5, wherein Ar in the formula (I) is a 1,4-phenylene group.
8. The composition of any preceding claim, wherein the content of the epoxy compound is 0.05 - 5 parts by weight based on component (a).
9. The composition of claim 8, wherein the content of the epoxy compound is 0.2 - 3 parts by weight based on component (a).
10. The composition of any preceding claim, wherein the elastomer has a glass transition temperature of not higher than 0 °C.
11. The composition of any preceding claim, wherein the tensile modulus of the elastomer is 5 - 2,000 kg/cm².
12. The composition of any preceding claim, wherein the content of the elastomer is 3 - 40 parts by weight based on component (a).
13. The composition of any preceding claim, wherein the elastomer is selected from:
 - (i) glycidyl group-containing copolymers of an α-olefin and a glycidyl ester of an α, β-unsaturated acid;
 - (ii) modified ethylene-based copolymers obtained by graft copolymerizing an ethylene-based polymer with 0.01 to 10% by weight of an unsaturated carboxylic acid or a derivative thereof;
 - (iii) ethylene-based random copolymers of ethylene and an unsaturated carboxylic acid or a derivative thereof;
 - (iv) acrylic polymers which may or may not contain a diene-based polymer; and
 - (v) conjugated diene-based polymers having at least one functional group selected from hydroxyl, carboxylic, acid anhydride, amino and cyano groups.
14. The composition of claim 13, wherein the α-olefin in the glycidyl group-containing copolymer is ethylene and the glycidyl ester of the α, β-unsaturated acid is glycidyl methacrylate and/or glycidyl




acrylate.

15. The composition of claim 14, wherein at least one unsaturated monomer selected from C₁ - C₁₀ alkyl acrylate, C₁ - C₁₀ alkyl methacrylate and vinyl acetate is further copolymerized with the glycidyl group-containing copolymer..
16. The composition of claim 13, 14, or 15, wherein the content of the glycidyl ester of the α , β -unsaturated acid in the glycidyl group-containing copolymer is 0.1 - 50% by weight.
17. The composition of claim 16, wherein the content of the glycidyl ester of the α , β -unsaturated acid in the glycidyl group-containing copolymer is 1 - 25% by weight.
18. The composition of claim 13, wherein the unsaturated carboxylic acid or the derivative thereof in the modified ethylene-based copolymer is at least one of C₃ - C₂₀ unsaturated carboxylic acids, acid anhydrides thereof, glycidyl esters thereof, imides thereof, amides thereof and metal salts thereof.
19. The composition of claim 13, wherein the ethylene-based polymer in the modified ethylene-based copolymer is selected from (A) copolymers of ethylene and propylene and/or butene-1; (B) copolymers of ethylene, propylene and/or butene-1 and C₆ - C₂₀ non-conjugated diene; (C) copolymers of ethylene and C₁ - C₁₀ alkylacrylate or C₁ - C₁₀ alkylmethacrylate; (D) copolymers of ethylene and saponified or non-saponified vinyl acetate; and (E) hydrogenated styrene-butadiene block copolymers or hydrogenated styrene-isoprene block copolymers.
20. The composition of claim 19, wherein the ethylene-based polymer in the modified ethylene-based copolymer is selected from ethylene/propylene copolymers, ethylene/propylene copolymers in which at least one non-conjugated diene of 1,4-hexadiene, dicyclopentadiene, or ethylidene norbornane is further copolymerized, ethylene/butene-1 copolymers, ethylene/butene-1 copolymers in which at least one non-conjugated diene of 1,4-hexadiene, dicyclopentadiene, or ethylidene norbornane is further copolymerized, ethylene/methyl acrylate copolymers, ethylene/ethyl acrylate copolymers, ethylene/butyl acrylate copolymers, ethylene/methyl methacrylate copolymers, ethylene/vinyl acetate copolymers, saponified ethylene/vinyl acetate copolymers, hydrogenated styrene-butadiene block copolymers and hydrogenated styrene-isoprene block copolymers.
21. The composition of any of claims 13 and 16 to 20, wherein the unsaturated carboxylic acid or the derivative thereof in the modified ethylene-based copolymer is selected from acrylic acid, methacrylic acid, maleic acid, fumaric acid, itaconic acid, crotonic acid, tetrahydrophthalic acid, 5-norbornene-2,3-dicarboxylic acid, methylenedimethylene tetrahydrophthalic acid and acid anhydrides, glycidyl esters and imides thereof.
22. The composition of claim 13, wherein the unsaturated carboxylic acid or the derivative thereof in the ethylene-based random copolymer is acrylic acid, methacrylic acid or a metal salt or a C₁ - C₈ alkyl ester thereof.
23. The composition of claim 13, wherein the acrylic polymer which may contain the diene-based polymer is a graft-copolymer which is obtained by graft copolymerizing at least one unsaturated monomer selected from acrylic acid, methacrylic acid, C₁ - C₈ alkylesters and glycidyl ester thereof, aromatic monovinyls and cyanated monovinyls with a graft base containing as its major constituent a C₁ - C₈ alkylacrylate or a C₁ - C₈ alkylmethacrylate, which may or may not contain polybutadiene.
24. The composition of claim 13, wherein the conjugated diene-based polymer is selected from the group consisting of polybutadiene, butadiene/styrene copolymers, butadiene-styrene block copolymers, styrene-isoprene block copolymers, butadiene/acrylonitrile copolymers obtained by copolymerizing or graft copolymerizing an unsaturated monomer having hydroxyl group, carboxyl group, acid anhydride group or amino group.
25. The composition of any preceding claim, wherein the elastomer has a melt flow rate of 0.1 - 100 g/10 minutes which is determined in accordance with ASTM D1238.



26. The composition of any preceding claim further comprising 0.01 - 5 parts by weight based on component (a) of a hindered phenol derivative and/or a sulfur-containing ester compound.


27. The composition of claim 26, wherein the hindered phenol-based compound has a structural unit represented by the formula (II):



(II)

(wherein R¹ is C₁ - C₁₀ alkyl)
and has a molecular weight not less than 500.

28. The composition of claim 26, wherein the sulfur-containing ester compound is represented by the formula (III) or (IV):



(wherein each of R² and R⁴, which may be the same or different, is a C₁ - C₁₀ alkyl group, and each of R³ and R⁵, which may be the same or different, is a C₃ - C₄₀ alkyl group).


29. The composition of any preceding claim further comprising a filler in an amount of 50% by weight with respect to the whole composition.

30. The composition of claim 29, wherein the filler is selected from glass fibers, carbon fibers, metal fibers, aramide fibers, potassium titanate whiskers, glass flakes, glass beads, wollastonite, gypsum fibers, clay, mica, talc, sepiolite, titanium oxide, aluminum oxide, calcium carbonate and barium carbonate.

31. A process for producing a polyester composition comprising the steps of:
blending in dry state

(a) 100 parts by weight of an aromatic polyester;

(b) 0.005 - 10 parts by weight based on component (a) of an epoxy compound of the formula (I):



(wherein Ar is a C₆ - C₂₀ aromatic group or C₆ - C₂₀ alicyclic group, n is from 0 to 20 inclusive); and

(c) 1 - 70 parts by weight based on component (a) of at least one elastomer which has at least one functional group selected from epoxy,

carboxyl, carboxylate ester, carboxylic acid amide, acid anhydride, imide, carboxylate salt, hydroxyl, amino and cyano groups, the elastomer having a tensile modulus of 1 - 6,000 kg/cm²; and

thereafter melting and stirring the resulting mixture at a temperature 5 - 50 °C higher than the melting point of the aromatic polyester.


Patentansprüche

1. Polyesterzusammensetzung, umfassend:



(a) 100 Gew.-Teile eines aromatischen Polyesters;

(b) 0,005 - 10 Gew.-Teile, bezogen auf Bestandteil (a), einer Epoxyverbindung der Formel (I):



(worin Ar eine aromatische C₆-C₂₀-Gruppe oder alizyklische C₆-C₂₀-Gruppe und n von 0 bis einschließlich 20 ist); und

(c) 1 - 70 Gew.-Teile, bezogen auf Bestandteil (a), von zumindest einem Elastomer, das zumindest eine aus Epoxy-, Carboxyl-, Carboxylatester-, Karbonsäureamid-, Säureanhydrid-, Imid-, Carboxylatsalz-, Hydroxyl-, Amino- und Cyanogruppen ausgewählte funktionelle Gruppe aufweist, wobei das Elastomer einen Elastizitätsmodul von 1 - 6.000 kg/cm² aufweist.

2. Zusammensetzung nach Anspruch 1, worin der aromatische Polyester bei 25 °C eine relative Viskosität von 1,10 - 2,0 aufweist, wenn er als 0,5%ige Lösung in o-Chlorphenol gemessen wird.

3. Zusammensetzung nach Anspruch 1 oder 2, worin der aromatische Polyester ein Polyalkylenterephthalat ist.

4. Zusammensetzung nach Anspruch 1 oder 2, worin der aromatische Polyester ein Polyzyklohexandimethylenterephthalat ist.

5. Zusammensetzung nach Anspruch 3, worin das Polyalkylenterephthalat Polybutylenterephthalat oder Polyäthylenterephthalat ist.

6. Zusammensetzung nach einem der vorhergehenden Ansprüche, worin Ar in der Formel (I) eine Phenylengruppe, Biphenylengruppe oder Naphthylengruppe ist.

7. Zusammensetzung nach einem der Ansprüche 1 bis 5, worin Ar in der Formel (I) eine 1,4-Phenylengruppe ist.

8. Zusammensetzung nach einem der vorhergehenden Ansprüche, worin der Gehalt der Epoxyverbindung 0,05 - 5 Gew.-Teile, ausgehend von Bestandteil (a), ist.

9. Zusammensetzung nach Anspruch 8, worin der Gehalt der Epoxyverbindung 0,2 - 3 Gew.-Teile, bezogen auf Bestandteil (a), ist.

10. Zusammensetzung nach einem der vorhergehenden Ansprüche, worin das Elastomer eine Glasübergangstemperatur von nicht mehr als 0 °C aufweist.

11. Zusammensetzung nach einem der vorhergehenden Ansprüche, worin der Elastizitätsmodul des Elastomers 5 - 2.000 kg/cm² beträgt.

12. Zusammensetzung nach einem der vorhergehenden Ansprüche, worin der Gehalt des Elastomers 3 - 40 Gew.-Teile, bezogen auf Bestandteil (a), ist.

13. Zusammensetzung nach einem der vorhergehenden Ansprüche, worin das Elastomer ausgewählt ist aus:

(i) Glycidylgruppe enthaltenden Copolymeren aus einem α-Olefin und einem Glycidylester einer α,β-ungesättigten Säure;

(ii) modifizierten Copolymeren auf Äthylenbasis, die durch Pfropfcopolymerisation eines Polymers auf Äthylenbasis mit 0,01 bis 10 Gew.-% einer ungesättigten Karbonsäure oder eines Derivats davon erhalten wurden;

(iii) Zufallscopolymeren auf Äthylenbasis aus Äthylen und einer ungesättigten Karbonsäure oder einem Derivat davon;



- (iv) Acrylpolymeren, die ein Polymer auf Dienbasis enthalten können oder nicht; und
(v) konjugierten Polymeren auf Dienbasis, die zumindest eine aus Hydroxyl-, Carboxyl-, Säureanhydrid-, Amino- und Cyanogruppen ausgewählte funktionelle Gruppe aufweisen.

- 5 14. Zusammensetzung nach Anspruch 13, worin das α -Olefin im Glycidylgruppe enthaltenden Copolymer Äthylen ist und der Glycidylester der α,β -ungesättigten Säure Glycidylmethacrylat und/oder Glycidylacrylat ist.
- 10 15. Zusammensetzung nach Anspruch 14, worin zumindest ein aus C_1 - C_{10} -Alkylacrylat, C_1 - C_{10} -Alkylmethacrylat und Vinylacetat ausgewähltes ungesättigtes Monomer weiter mit dem Glycidylgruppe enthaltenden Copolymer copolymerisiert ist.
- 15 16. Zusammensetzung nach Anspruch 13, 14 oder 15, worin der Gehalt an Glycidylester der α,β -ungesättigten Säure im Glycidylgruppe enthaltenden Copolymer 0,1 - 50 Gew.-% beträgt.
17. Zusammensetzung nach Anspruch 16, worin der Gehalt an Glycidylester der α,β -ungesättigten Säure im Glycidylgruppe enthaltenden Copolymer 1 - 25 Gew.-% beträgt.
- 20 18. Zusammensetzung nach Anspruch 13, worin die ungesättigte Karbonsäure oder das Derivat davon im modifizierten Copolymer auf Äthylenbasis zumindest eines aus ungesättigten C_3 - C_{20} -Karbonsäuren, Säureanhydriden davon, Glycidylestern davon, Imiden davon, Amiden davon und Metallsalzen davon ist.
- 25 19. Zusammensetzung nach Anspruch 13, worin das Polymer auf Äthylenbasis im modifizierten Copolymer auf Äthylenbasis aus (A) Copolymeren aus Äthylen und Propylen und/oder Buten-1; (B) Copolymeren aus Äthylen, Propylen und/oder Buten-1 und nichtkonjugiertem C_6 - C_{20} -Dien; (C) Copolymeren aus Äthylen und C_1 - C_{10} -Alkylacrylat oder C_1 - C_{10} -Alkylmethacrylat; (D) Copolymeren aus Äthylen und verseiftem oder nichtverseiftem Vinylacetat; und (E) hydrierten Styrol-Butadien-Blockcopolymeren oder hydrierten Styrol-Isopren-Blockcopolymeren ausgewählt ist.
- 30 20. Zusammensetzung nach Anspruch 19, worin das Polymer auf Äthylenbasis im modifizierten Copolymer auf Äthylenbasis aus Äthylen/Propylen-Copolymeren, Äthylen/Propylen-Copolymeren, worin zumindest ein nichtkonjugiertes Dien aus 1,4-Hexadien, Dizyklopentadien oder Ethylidennorbornan weiter copolymerisiert ist, Äthylen/Buten-1-Copolymeren, Äthylen/Buten-1-Copolymeren worin zumindest ein nichtkonjugiertes Dien aus 1,4-Hexadien, Dizyklopentadien oder Äthylidennorbornan weiter copolymerisiert ist, Äthylen/Methylacrylat-Copolymeren, Äthylen/Äthylacrylat-Copolymeren, Äthylen/Butylacrylat-Copolymeren, Äthylen/Methylmethacrylat-Copolymeren, Äthylen/Vinylacetat-Copolymeren, verseiften Äthylen/Vinylacetat-Copolymeren, hydrierten Styrol-Butadien-Blockcopolymeren und hydrierten Styrol-Isopren-Blockcopolymeren ausgewählt ist.
- 35 21. Zusammensetzung nach einem der Ansprüche 13 und 16 bis 20, worin die ungesättigte Karbonsäure oder das Derivat davon im modifizierten Copolymer auf Äthylenbasis aus Acrylsäure, Methacrylsäure, Maleinsäure, Fumarsäure, Itakonsäure, Krotonsäure, Tetrahydrophthalsäure, 5-Norbornan-2,3-Dikarbonsäure, Methylendomethylentetrahydrophthalsäure und Säureanhydriden, Glycidylestern und Imiden davon ausgewählt ist.
- 40 22. Zusammensetzung nach Anspruch 13, worin die ungesättigte Carbonsäure oder das Derivat davon im Zufallscopolymer auf Äthylenbasis Acrylsäure, Methacrylsäure oder ein Metallsalz oder ein C_1 - C_8 -Alkylester davon ist.
- 45 23. Zusammensetzung nach Anspruch 13, worin das Acrylpolymer, das das Polymer auf Dienbasis enthalten kann, ein Ppropfcopolymer ist, das durch Ppropfcopolymerisation von zumindest einem aus Acrylsäure, Methacrylsäure, C_1 - C_8 -Alkylestern und Glycidylestern davon ausgewählten ungesättigten Monomeren, aromatischen Monovinylen und cyanierten Monovinylen mit einer Ppropfbasis erhalten wird, die als ihren Hauptbestandteil ein C_1 - C_8 -Alkylacrylat oder ein C_1 - C_8 -Alkylmethacrylat enthält, das Polybutadien enthalten kann oder nicht.
- 50
- 55




24. Zusammensetzung nach Anspruch 13, worin das konjugierte Polymer auf Dienbasis aus der Gruppe ausgewählt ist, die aus Polybutadien, Butadien/Styrol-Copolymeren, Butadien-Styrol-Blockcopolymeren, Styrol-Isopren-Blockcopolymeren, Butadien/Acrylnitril-Copolymeren besteht, die durch das Copolymerisieren oder Pfropfcopolymerisieren eines ungesättigten Monomers, das Hydroxylgruppe, Carboxylgruppe, Säureanhydridgruppe oder Aminogruppe enthält, erhalten werden.

25. Zusammensetzung nach einem der vorhergehenden Ansprüche, worin das Elastomer eine Schmelzflußrate von 0,1 - 100 g/10 Minuten aufweist, bestimmt nach ASTM D1238.

26. Zusammensetzung nach einem der vorhergehenden Ansprüche, die weiters 0,01-5 Gew.-Teile, bezogen auf Bestandteil (a), eines gehinderten Phenolderivats und/oder einer schwefelhaltigen Esterverbindung umfaßt.


27. Zusammensetzung nach Anspruch 26, worin die gehinderte Verbindung auf Phenolbasis eine Struktureinheit der Formel (II):



(II)

aufweist (worin R_1 C_1 - C_{10} -Alkyl ist) und ein Molekulargewicht von nicht weniger als 500 aufweist.

28. Zusammensetzung nach Anspruch 26, worin die schwefelhaltige Esterverbindung durch die Formel (III) oder (IV) dargestellt ist:



(worin jedes aus R^2 und R^4 , die gleich oder voneinander verschieden sein können, eine C_1 - C_{10} -Alkylgruppe ist und jedes aus R^3 und R^5 , die gleich oder voneinander verschieden sein können, eine C_3 - C_{40} -Alkylgruppe ist).


29. Zusammensetzung nach einem der vorhergehenden Ansprüche, die weiters einen Füllstoff in einer Menge von 50 Gew.-%, bezogen auf die gesamte Zusammensetzung, umfaßt.

30. Zusammensetzung nach Anspruch 29, worin der Füllstoff aus Glasfasern, Kohlenstofffasern, Metallfasern, Aramidfasern, Kaliumtitanatwhiskern, Glasflocken, Glaskugeln, Wollastonit, Gipsfasern, Ton, Glimmer, Talk, Sepiolit, Titanoxid, Aluminiumoxid, Kalziumkarbonat und Bariumkarbonat ausgewählt ist.

31. Verfahren zur Herstellung einer Polyesterzusammensetzung, folgende Schritte umfassend: das Mischen in trockenem Zustand von

(a) 100 Gew.-Teilen eines aromatischen Polyesters;

(b) 0,005 - 10 Gew.-Teilen, bezogen auf Bestandteil (a), einer Epoxyverbindung der Formel (I):



(c) 1-70 Gew.-Teilen, bezogen auf Bestandteil (a), von zumindest einem Elastomer, das zumindest eine aus Epoxy-, Carboxyl-, Carboxylatester-, Karbonsäureamid-, Säureanhydrid, Imid-, Carboxylatsalz-, Hydroxyl-, Amino- und Cyanogruppen ausgewählte funktionelle Gruppe aufweist, wobei das Elastomer einen Elastizitätsmodul von 1 - 6.000 kg/cm² aufweist; und

10 Revendications

- (a) 100 parties en poids d'un polyester aromatique ;

- 15



25

- 25

- 30

- 35

- 40

- 45

- 50

- 55

- 55



12. Composition selon toute revendication précédente, où la teneur en élastomère est de 3-40 parties en poids, en se basant sur le composant (a).

13. Composition selon toute revendication précédente, où l'élastomère est choisi parmi :

- (i) copolymères contenant un groupe glycidyle d'une α -oléfine et d'un ester glycidyle d'un acide α,β -insaturé ;
- (ii) copolymères modifiés à base d'éthylène obtenus en copolymérisant par greffe un polymère à base d'éthylène avec 0,01 à 10% en poids d'un acide carboxylique insaturé ou un dérivé ;
- (iii) copolymères statistiques à base d'éthylène, d'éthylène et d'un acide carboxylique insaturé ou un dérivé ;
- (iv) polymères acryliques qui peuvent ou non contenir un polymère à base d'un diène ; et
- (v) polymères conjugués à base d'un diène ayant au moins un groupe fonctionnel choisi parmi des groupes hydroxyles, carboxyliques, anhydrides d'acide, amino et cyano.

14. Composition de la revendication 13, où l' α -oléfine dans le copolymère contenant un groupe glycidyle est de l'éthylène et l'ester glycidyle de l'acide α,β -insaturé et le méthacrylate de glycidyle et/ou l'acrylate de glycidyle.

15. Composition de la revendication 14, où au moins un monomère insaturé choisi parmi un acrylate d'alkyle C_1 - C_{10} , un méthacrylate d'alkyle C_1 - C_{10} et de l'acétate de vinyle est de plus copolymérisé avec le copolymère contenant un groupe glycidyle.

16. Composition de la revendication 13, 14 ou 15, où la teneur en ester glycidyle de l'acide α,β -insaturé dans le copolymère contenant un groupe glycidyle, est de 0,1- 50% en poids.

17. Composition de la revendication 16, où la teneur en ester glycidyle de l'acide α,β -insaturé dans le copolymère contenant un groupe glycidyle est de 1%-25% en poids.

18. Composition de la revendication 13, où l'acide carboxylique insaturé ou son dérivé dans le copolymère à base d'éthylène modifié est au moins un parmi des acides carboxyliques insaturés C_3 - C_{20} , leurs anhydrides d'acide, leurs esters glycidyliques, leurs imides, leurs amides et leurs sels de métaux.

19. Composition de la revendication 13, où le polymère à base d'éthylène, dans le copolymère modifié à base d'éthylène, est choisi parmi (A) des copolymères d'éthylène et de propylène et/ou butène-1 ; (B) des copolymères d'éthylène, propylène et/ou butène-1, et un diène non conjugué C_6 - C_{20} ; (C) des copolymères d'éthylène et d'acrylate d'alkyle C_1 - C_{10} ou de méthacrylate d'alkyle C_1 - C_{10} ; (D) des copolymères d'éthylène et d'acétate de vinyle saponifié ou non saponifié; et (E) des copolymères séquencés et hydrogénés de styrène-butadiène ou des copolymères séquencés et hydrogénés de styrène-isoprène.

20. Composition de la revendication 19, où le polymère à base d'éthylène, dans le copolymère modifié à base d'éthylène, est choisi parmi des copolymères d'éthylène/propylène, des copolymères d'éthylène/propylène où au moins un diène non conjugué de 1,4-hexadiène, dicyclopentadiène ou éthylidène norbornane est, de plus, copolymérisé, des copolymères d'éthylène/butène-1, des copolymères d'éthylène/butène-1 où au moins un diène non conjugué de 1,4-hexadiène, dicyclopentadiène ou éthylidène norbornane est, de plus, copolymérisé, des copolymères d'éthylène/acrylate de méthyle, des copolymères d'éthylène/acrylate d'éthyle, des copolymères d'éthylène/acrylate de butyle, des copolymères d'éthylène/méthacrylate de méthyle, des copolymères d'éthylène/acétate de vinyle, des copolymères saponifiés d'éthylène/acétate de vinyle, des copolymères séquencés hydrogénés de styrène/butadiène et des copolymères séquencés hydrogénés de styrène/isoprène.

21. Composition selon l'une quelconque des revendications 13 et 16 à 20, où l'acide carboxylique insaturé ou son dérivé dans le copolymère modifié à base d'éthylène, est choisi parmi acide acrylique, acide méthacrylique, acide maléique, acide fumarique, acide itaconique, acide crotonique, acide tétrahydrophthalique, acide 5-norbornane-2,3-dicarboxylique, acide méthylendo-méthylène tétrahydrophthalique et anhydrides d'acide, leurs esters glycidyliques et leurs imides.



22. Composition de la revendication 13, où l'acide carboxylique insaturé ou son dérivé, dans le copolymère statistique à base d'éthylène, est l'acide acrylique, l'acide méthacrylique ou un sel de métal ou son ester alkylé C₁-C₈.


23. Composition de la revendication 13, où le polymère acrylique qui peut contenir le polymère à base de diène est un copolymère greffé qui est obtenu en copolymérisant par greffe au moins un monomère insaturé choisi parmi l'acide acrylique, l'acide méthacrylique, des esters alkylés C₁-C₈ et leurs esters glycidiques, des monovinyliques aromatiques et des monovinyliques cyanurés avec une base de greffe contenant, comme constituant majeur un acrylate d'alkyle C₁-C₈ ou un méthacrylate d'alkyle C₁-C₈ pouvant ou non contenir du polybutadiène.

24. Composition de la revendication 13, où le polymère à base d'un diène conjugué est choisi dans le groupe consistant en polybutadiène, copolymères de butadiène/styrène, copolymères séquencés de butadiène-styrène, copolymères séquencés de styrène-isoprène, copolymères de butadiène/acrylonitrile obtenus par copolymérisation ou copolymérisation par greffe d'un monomère insaturé ayant un groupe hydroxyle, un groupe carboxyle, un groupe anhydride d'acide ou un groupe amino.

25. Composition selon toute revendication précédente, où l'élastomère a un débit en phase fondue de 0,1-100 g/10 minutes qui est déterminé selon ASTM D1238.


26. Composition selon toute revendication précédente, contenant de plus 0,01-5 parties en poids, en se basant sur le composant (a), d'un dérivé de phénol empêché et/ou d'un composé d'ester contenant du soufre.

27. Composition de la revendication 26, où le composé à base de phénol empêché a une unité de structure représentée par la formule (II) :

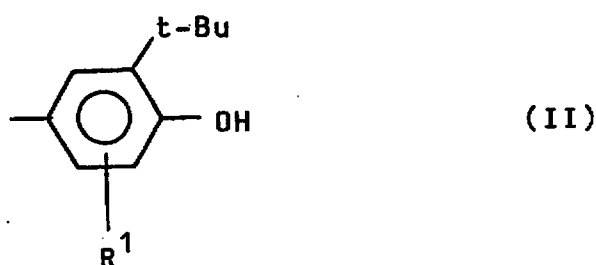

(où R¹ est alkyle C₁-C₁₀) et a un poids moléculaire de pas moins de 500.

28. Composition de la revendication 26, où le composé d'ester contenant du soufre est représenté par la formule (III) ou (IV) :



(où chacun de R² et R⁴, qui peuvent être identiques ou différents, est un groupe alkyle C₁-C₁₀ et chacun de R³ et R⁴ qui peuvent être identiques ou différents, est un groupe alkyle C₃-C₄₀).

29. Composition selon toute revendication précédente, comprenant de plus une charge en une quantité de 50% en poids par rapport à la totalité de la composition.

30. Composition de la revendication 29, où la charge est choisie parmi des fibres de verre, des fibres de carbone, des fibres de métal, des fibres d'Aramid, des barbes de titanate de potassium, des paillettes de verre, des perles de verre, de la wollastonite, des fibres de gypse, de l'argile, du mica, du talc, de la




zéolite, de l'oxyde de titane, de l'oxyde d'aluminium, du carbonate de calcium et du carbonate de baryum.

31. Procédé de production d'une composition de polyester comprenant les étapes de :

mélanger à l'état sec

(a) 100 parties en poids d'un polyester aromatique ;

(b) 0,005-10 parties en poids, en se basant sur le composant (a), d'un composé époxy de la formule (I) :



(où Ar est un groupe aromatique C₆-C₂₀ ou un groupe alicyclique C₆-C₂₀, n est compris entre 0 et 20 inclus; et

(c) 1-70 parties en poids, en se basant sur le composant (a), d'au moins un élastomère qui a au moins un groupe fonctionnel choisi parmi les groupes époxy, carboxyle, ester de carboxylate, amide d'acide carboxylique, anhydride d'acide, imide, sel de carboxylate, hydroxyle, amino et cyano, l'élastomère ayant un module de traction de 1-6.000 kg/cm²; et

ensuite, fondre et soumettre à agitation le mélange résultant à une température plus élevée de 5-50 °C que le point de fusion du polyester aromatique.