




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H03G 3/20	A2	(11) International Publication Number: WO 99/31798 (43) International Publication Date: 24 June 1999 (24.06.99)
(21) International Application Number: PCT/IB98/01960 (22) International Filing Date: 7 December 1998 (07.12.98) (30) Priority Data: 97203902.8 12 December 1997 (12.12.97) EP (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors: BERGVELD, Hendrik, J.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). SCHOOF, Franciscus, A., C., M.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: DEGUELLE, Wilhelmus, H., G.; Internationaal Oc- troobureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).	(81) Designated States: CN, IN, JP, KR, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished</i> <i>upon receipt of that report.</i>	

(54) Title: A COMMUNICATION SYSTEM, DEVICE AND METHOD

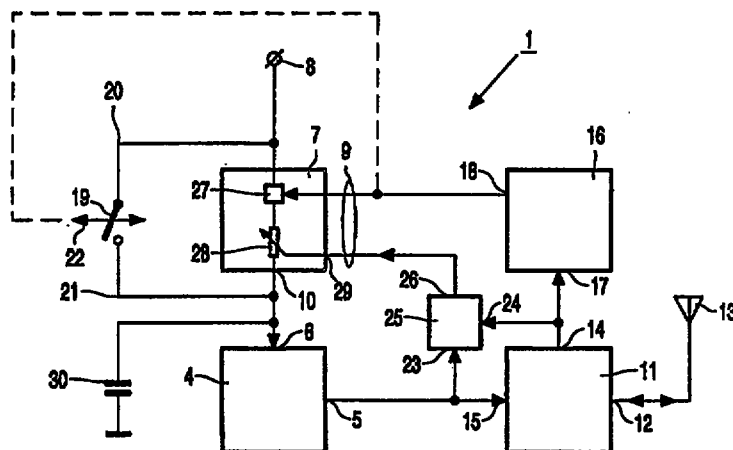

(57) Abstract

A communication system such as a telephone system has at least a base station and a communication device to communicate with the base station, the communication device comprises an RF power amplifier having an RF output for coupling to an antenna and an RF output power control input, a power supply having a power supply terminal, a control input and a supply output coupled to the RF output power control input for controlling an RF output power on the RF output in dependence on a signal on the control input of the power supply, a data receiver means for coupling to the antenna, the data receiver means having a data output for providing data received from the base station which represents information about said RF output power, and a table means containing a listing of possible power supply control input values related to possible RF output power values, the table means having a table selection input coupled to the data output of the data receiver means and a table output coupled to the control input of the power supply for using said RF output power related information to select that power supply control input value in the table means which corresponds to a desired RF output power value.