



- (51) International Patent Classification:
C11C 5/00 (2006.01) *F23D 3/16* (2006.01)
- (21) International Application Number:
PCT/IL2014/050799
- (22) International Filing Date:
9 September 2014 (09.09.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
228306 9 September 2013 (09.09.2013) IL
- (71) Applicant: KOMI ORI LTD. [IL/IL]; 72 Pinto Haim St.,
8756948 Ofakim (IL).
- (72) Inventor: AZAR, Yosi; 72/6 Pinto Haim St., 8756948
Ofakim (IL).
- (74) Agent: STERN, Guillaume; Reinhold Cohn and Partners,
P.O.Box 13239, 6113102 Tel Aviv (IL).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: LIQUID CANDLE SYSTEM

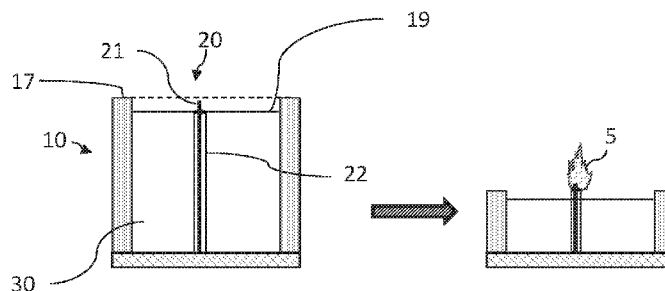


Fig. 3

(57) Abstract: The present disclosure provides a candle system comprising a fuel recipient comprising a self-collapsing cavity configured for receiving a predetermined liquid fuel; and a wick, wherein the self-collapsing cavity is configured for progressively collapsing when the cavity is filled with the predetermined liquid fuel and the wick is lit.