

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

B27B 5/10

A1

(11) International Publication Number:

WO 96/21544

(43) International Publication Date:

18 July 1996 (18.07.96)

(21) International Application Number: PCT/US95/17032

(22) International Filing Date: 29 December 1995 (29.12.95)

(30) Priority Data:

08/370,374

9 January 1995 (09.01.95)

US

(71) Applicant: DIAMANT BOART, INC. [US/US]; 4320 Clary Boulevard, Kansas City, MO 64130 (US).

(72) Inventors: KINGSLEY, Michael, G.; 15401 East 33rd Street, Independence, MO 64050 (US). WILSON, Kevin, R.; 2609 NE Hunters Walk Trail, Blue Springs, MO 64014 (US). MEISTER, Donald, F.; 11626 Monrovia, Overland Park, KS 66210 (US).


(74) Agents: BOWMAN, Joseph, B. et al.; Kokjer, Kircher, Bowman & Johnson, P.C., 2414 Commerce Tower, 911 Main Street, Kansas City, MO 64105 (US).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.
With amended claims.

(54) Title: SELF PROPELLED SAW

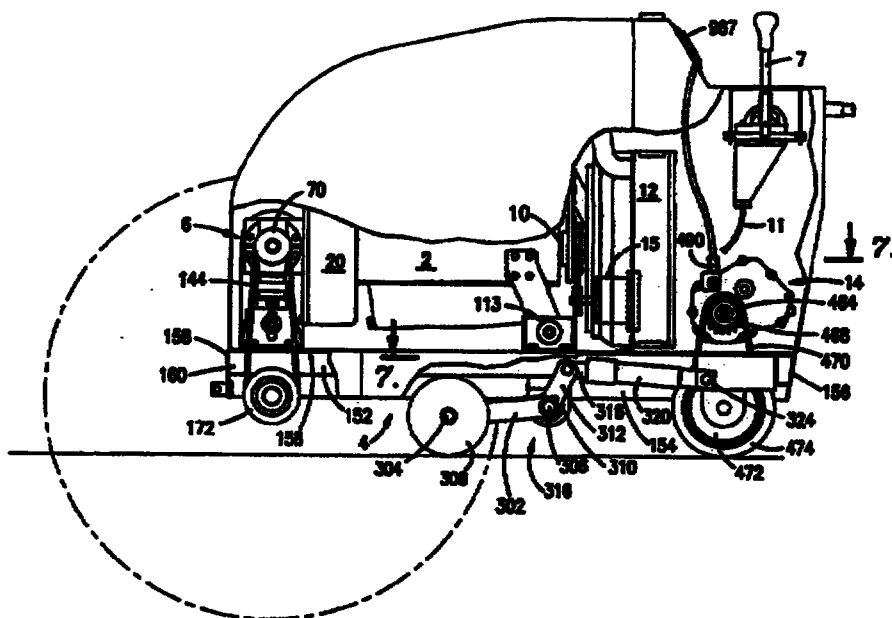

(57) Abstract

A concrete saw is provided having an engine (2) aligned along a longitudinal axis of the saw frame to minimize the width of the saw and provide a more balanced system. A right angle gear box (60) is provided proximate the driven side of a clutch assembly to transfer driving rotational forces from the engine to a transversely aligned driven shaft (58). The driven shaft includes drive pulleys (70, 71) mounted upon opposite ends thereof, which are aligned with driven pulleys (172, 174) mounted upon opposite ends of a blade support shaft (178) and linked to one another via multiple belts (144, 146).