

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
15 November 2001 (15.11.2001)

PCT

(10) International Publication Number
WO 01/86190 A1

(51) International Patent Classification⁷: **F16L 55/128**

[GB/GB], 6 Old Forge Close, Digswell Water, Welwyn,
Herts AL6 0SR (GB)

(21) International Application Number: PCT/GB01/01927

(22) International Filing Date: 3 May 2001 (03 05 2001)

(74) Agent: **Andrew MACKENZIE**, Sommerville & Rushton,
45 Grosvenor Road, St. Albans AL1 3AW (GB)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0011250.8 11 May 2000 (11.05.2000) GB

(71) Applicant (for all designated States except US): **TEX-
TRON FASTENING SYSTEMS LIMITED** [GB/GB],
Mundells, Welwyn Garden City, Herts AL7 1EZ (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KEITH, Denham**

[Continued on next page]

(54) Title: CLOSED END SEALING PLUG

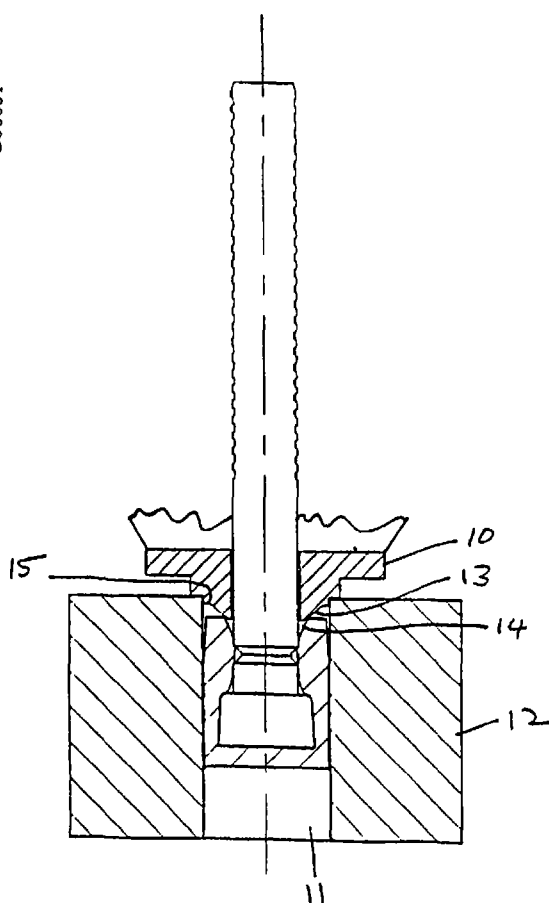

(57) Abstract: A sealing plug for blind installation in a suitable hole thereby to plug and seal the hole, which sealing plug comprises a sleeve (1) having one end closed, a stem (2) having a head (4) at least part of which is radially enlarged with respect to the remainder of the stem, the stem head being within the sleeve and the stem protruding from the open end of the sleeve by passing through a part of the sleeve which has an internal cross-sectional dimension less than that of the stem head, the stem head having a shoulder (8), and there being an abutment of sleeve material against at least the radially outer part of the shoulder, the stem head being of a material which is harder than that of the sleeve and being formed with a weakened portion at a position intermediate the head and the part of the stem remote therefrom, whereby, when the sealing plug is inserted in a suitable hole, with the sleeve entirely within the hole, and increasing tension force is applied to the stem with respect to the sleeve, axial compression is applied by the shoulder to engage with the hole, and thereafter the stem breaks at the weakened portion (3) so that the head remains within the sleeve



IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG)

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette

Published:

— *with international search report*