

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number
WO 01/51356 A1

- (51) International Patent Classification⁷: B64F 1/32, B65G 67/08
- (74) Agent: CHAS. HUDE A/S; 33 H.C. Andersens Boulevard, DK-1780 Copenhagen V (DK).
- (21) International Application Number: PCT/DK01/00012
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 10 January 2001 (10.01.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PA 2000 00031 11 January 2000 (11.01.2000) DK
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): SCANDINAVIAN AIRLINES SYSTEM [DK/DK]; P.O. Box 150, DK-2770 Kastrup (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): THØGERSEN, Lars [DK/DK]; Svend Vonvedsvej 1, DK-2300 Copenhagen S (DK).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: AN APPARATUS FOR LOADING AND UNLOADING AIRCRAFTS

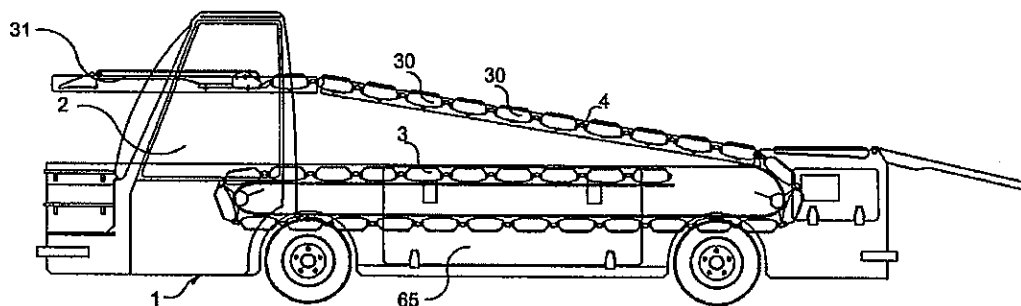

(57) Abstract: An apparatus for loading and unloading aircrafts comprises a tiltable first conveyor part (7) adjustable in height and provided with a conveyor path (11) advancing and removing luggage (59), such as suitcases, parcels and the like cargo items, to and from the apparatus. The apparatus comprises further a second conveyor part (8) extendable from the first conveyor part and being adapted to be moved through an opening in the aircraft and into the cargo compartment of said aircraft. This second conveyor part (8) comprises a conveyor path advancing or removing the luggage to or from the storing site inside the cargo compartment. The second conveyor part (8) comprises a plurality of pivotally interconnected conveyor units (30, 31) with their respective activatable conveyor paths and their respective sets of wheels (44).

WO 01/51356 A1

Title: An Apparatus for Loading and Unloading Aircrafts.

Technical Field

The invention relates to an apparatus for loading and unloading aircrafts, where said apparatus comprises a tiltable first conveyor part adjustable in height and comprising
5 a conveyor path advancing and removing luggage, such as suitcases, parcels and the like cargo items, to and from a second conveyor part connected to and being extend-
able from said first conveyor part, where said second conveyor part is adapted to be extended into the aircraft through an opening therein and into the cargo compartment of said aircraft, and where said second conveyor part comprises a conveyor path
10 advancing and removing the luggage to or from the storing site inside the cargo compartment.

In connection with the loading and unloading of small aircrafts, such as DC 9, MD 80'ies and Boeing 737 etc., viz. the so-called narrow body aircrafts, it is common knowledge that the work involved is very stressful to the persons involved. The latter
15 is due to the facts that the time available is often very short and that the cargo compartment is of such a small size that the person in question must lie on his knees or sit down inside said cargo compartment while handling the luggage. Accordingly, a relatively high risk of physical damages applies.

Several suggestions have been made to facilitate the work in question. The use of any
20 kind of auxiliary equipment is usually conditioned by said equipment being removed from the aircraft once the loading and unloading operations have been terminated because the weight of said auxiliary equipment has the effect that it cannot be left in the aircraft. In addition, the auxiliary equipment must be movable into and out of the aircraft in a relatively quick manner due to the rather short period available.

25 WO 98/54073 discloses an apparatus for a manual loading and unloading of aircrafts.

This known apparatus comprises a telescopic conveyor being moved into the cargo compartment and being provided at the end with a table adjustable in height, said table being placed inside the cargo compartment so as to allow a piling of the cargo items therefrom. A conveyor belt is arranged outside the aircraft, said conveyor belt advancing the cargo items to the telescopic conveyor part.

DK-PS No. 170863 discloses a conveyor with a plurality of linked units, where each unit on the upper face comprises a plurality of carrier rollers. These carrier rollers are in turn carried by transverse shafts and are provided with wheels on the bottom side, said wheels allowing the units to roll on a base. A plurality of these linked units is pulled into the cargo compartment of the aircraft from a storing compartment below a belt conveyor arranged outside said aircraft.

Brief Description of the Invention

The object of the invention is to provide an apparatus which presents a relatively simple structure, and which allows a relatively easy advancing and removal of cargo items into and out of the cargo compartment of an aircraft while ensuring an easy and continuous movement of said cargo items.

According to one aspect of the invention, there is provided a ground apparatus for loading and unloading an aircraft with a cargo compartment, said apparatus comprising: a height-adjustable and tiltable first conveyor part which is adapted to convey cargo between an area outside said cargo compartment and a second conveyor, said second conveyor having a first end and a second end and being at least partially extendable from said apparatus into said cargo compartment, said second conveyor including a succession of conveyor units of which a first end conveyor unit is arranged at said first end, wherein each conveyor unit has a set of wheels and wherein the conveyor units are mutually interconnected means of coupling members that allow for a sideways mutual pivotal movement of said conveyor units, characterised in that each of said conveyor units define a respective activatable conveyor path and in that said first end conveyor unit includes means for varying the inclination of said conveyor path of said first end conveyor unit, whereby a mutual sideways pivotal movement of at least two successive conveyor units allow for a sideways movement of said first end conveyor unit.

2a

As a result it is relatively easy to handle the extendable second conveyor while simultaneously allowing an easy and continuous movement of the cargo items because the individual conveyor units roll on the floor of the cargo compartment towards and away from the loading site in question inside said cargo compartment and because said conveyor units are adapted to assist in the movement of said cargo items by

means of their own driving means.

According to the invention the conveyor paths of the first and the second conveyor part, respectively, may extend end to end, and the pivotally interconnected conveyor units may at least partially form part of the conveyor paths of both conveyor units
5 because they continue directly into one another from the first to the second conveyor part during the extension and the retraction of the second conveyor part. The resulting total conveyor path of the apparatus is relatively uninterrupted and plane.

According to an advantageous embodiment of the invention, the first conveyor part may comprise a continuous conveyor belt, where the conveyor path of said conveyor
10 belt is adjustable in length in response to the extension or retraction of the conveyor units.

Furthermore, the apparatus according to the invention may comprise a bridge member, by means of which the conveyor units of the second conveyor part are transferred between the apparatus and the aircraft. This bridge member ensures an even
15 transition between the apparatus and the aircraft.

According to the invention it is particularly advantageous when the continuous conveyor belt of the first conveyor part extends between a front turning member placeable adjacent the aircraft and a rearmost turning member, where said first conveyor part in addition comprises an intermediate redirecting member reciprocating in the
20 conveying direction and directing the conveyor belt from a rectilinear upper path between the rearmost turning member and the redirecting member to an intermediate path parallel to the upper path, but on a level below said upper path between the redirecting member and the front turning member, whereby the conveyor belt between the front turning member and the rearmost turning member extends below the
25 upper and the intermediate paths, and whereby the upper path forms at least part of the conveyor path of the first conveyor part, and whereby the rear end of the number

of conveyor units is connected to the redirecting member of the first conveyor part and accordingly adapted to follow the reciprocating movement thereof, said conveyor units being moved above the intermediate path of the first conveyor part while positioned outside the aircraft. As a result the conveyor paths of the first and the second
5 conveyor part, respectively, can in a simple manner continue substantially uninterruptedly into one another while it is simultaneously ensured that room is provided for the number of conveyor units or the rearmost portion thereof when all conveyor units or the rearmost portion thereof are not positioned inside the aircraft.

The apparatus may according to the invention advantageously comprise a supporting
10 means supporting the endless conveyor belt of the first conveyor part during its movement within the upper path.

According to the invention it is particularly advantageous when the conveyor paths of both conveyor parts are formed by means of the conveyor units across their entire length. Furthermore, the apparatus may according to the invention comprise a com-
15 partment for receiving the rearmost end of the number of conveyor units, said conveyor units in sequence being adapted to be moved out of or into said compartment in response to the distance which the front end must be moved into the aircraft. In this manner it is easy to adapt the number of conveyor units to the length of the cargo compartment of the aircraft in question.

20 Moreover, the first conveyor part may comprise an endless conveyor belt and be arranged above the path of the conveyor units to an area adjacent the bridge member with the result that it is possible to limit the number of conveyor units and consequently the associated compartment capacity of the apparatus.

The front conveyor unit may according to the invention comprise a conveyor flap
25 pivotally journalled at the back and which can be arranged with a desired inclination relative to the operating plane of the remaining conveyor units by means of driving

means. As a result the operator can place the front end of the conveyor flap at a desired level opposite the stack of cargo items being handled at the specific time inside the aircraft.

In this connection the conveyor flap may according to the invention at the front end
5 farthest away from the pivoting location be provided with a conveyor front member also being hingedly journalled, and which can be set with a desired inclination relative to the advancing plane of the conveyor flap by means of its own driving means. As a result the operator can place the front member in a plane suited for the most advantageous path in and out of a stack of the cargo item in question.

- 10 According to the invention each conveyor unit may comprise an endless conveyor belt driven by a driving roller and one or more additional rollers which are all carried by a frame, said frame in turn being supported by a wheel-carrying support member. The resulting conveyor unit is particularly simple.

The conveyor flap of the front conveyor unit may according to the invention be
15 formed by the frame and the associated conveyor belt and be pivotally journalled on the wheel-carrying support member, and the driving means thereof may be a plurality of electrically driven actuators. As a result, the front conveyor unit can in a simple manner be moved forwards and backwards inside a cargo compartment although the conveyor flap is arranged with an inclination relative to the floor of said cargo com-
20 partment.

Moreover, the conveyor flap may according to the invention project a distance beyond the associated support member when seen in the conveying direction of the second conveyor part during the loading, and according to the invention the conveyor flap may at its front end or the conveyor front member be provided with wheels for
25 supporting said conveyor flap and said conveyor front member when they are in the flapped down position. As a result, an operator can easily find room below the

conveyor flap for his legs when said conveyor flap is placed in an inclined position. However, when the conveyor front member is flapped down the wheels of said conveyor front member ensure that the flap is supported and can be easily handled together with the remaining conveyor units.

- 5 It is according to the invention particularly advantageous when the front end of the second conveyor part is provided with a control means connected to all the driving means of the apparatus in such a manner that an operator present inside the aircraft can guide said means by activating said control means. As a result the operator has an efficient control of both conveyor parts.
- 10 The conveyor units may according to the invention be interconnected by means of releasable coupling means with the result that the conveyor units are easily replaced and it is possible, if desired, to adjust the number thereof to the prevailing requirements.

- Furthermore, the bridge member may according to the invention comprise guiding
15 means for guiding the second conveyor part while it is moved inwards and outwards of the cargo compartment of the aircraft. The resulting movement can be performed in a relatively easy manner.

- Moreover, at least some of the coupling means of the conveyor units may according to the invention be such that adjacent conveyor units can be mutually displaced
20 transverse to the conveying direction with the result that they are very easily adjusted to the dimensions of the cargo compartment.

According to the invention it is particularly advantageous when the conveyor front member on the front conveyor unit comprises an endless conveyor belt with its own driving means.

Finally, the apparatus may according to the invention suitably be arranged on a vehicle.

Brief Description of the Drawings

The invention is explained in greater detail below with reference to the accompanying
5 drawings, in which

Fig. 1 is a diagrammatic side view of a first embodiment of the apparatus according to the invention, whereby parts have been removed for the sake of clarity,

Fig. 2 is a side view of a first and a second conveyor part of Fig. 1, where the second conveyor part is arranged in the completely extended state,

10 Fig. 3 corresponds to Fig. 1, but where the second conveyor part is arranged in the partly extended state,

Fig. 4 corresponds to Fig. 2, but where the second conveyor part is completely retracted relative to the first conveyor part,

Fig. 5 is a top view of the embodiment of Fig. 4,
15

Fig. 6 is a top view on a larger scale of the embodiment of Fig. 5, but where parts have been removed for the sake of clarity,

Fig. 7 is a side view of the embodiment of Fig. 6,

Figs. 8 to 11 are diagrammatic top views of various steps of the apparatus during the
20 moving of the second conveyor part into the cargo compartment of an aircraft,

Fig. 12 is a diagrammatic view of the apparatus with a bridge member extending through the opening into the cargo compartment of an aircraft, but where the conveyor parts have been removed for the sake of clarity,

5 Figs. 13 and 14 are a top and a side view, respectively, of the various steps of the front end of the second conveyor part,

Fig. 15 is a diagrammatic, perspective view of a conveyor unit forming part of the second conveyor part, whereby parts have been shown separately for the sake of clarity,

10 Figs. 16 and 17 are diagrammatic views of the front end of the second conveyor part during the loading and the unloading, respectively,

Figs. 18 and 19 are diagrammatic views of a second embodiment of the apparatus according to the invention, where both the first and the second conveyor part are formed by a coherent row of conveyor units shown in the extended and the retracted state, respectively,

15 Fig. 20 illustrates an apparatus according to the invention with a tiltable bridge member,

Fig. 21 is a perspective view of a second embodiment of a conveyor unit forming part of the second conveyor part, where the individual parts have been separated for the sake of clarity,

20

Fig. 22 is a perspective view of a second embodiment of the front conveyor unit of the second conveyor part,

Fig. 23 is a perspective view of a second embodiment of a bridge member, and

Fig. 24 illustrates a third embodiment of the apparatus according to the invention, where the first conveyor part is formed by an endless conveyor belt arranged above the row of conveyor units of the first conveyor part within the path of said conveyor units from a storing compartment to the bridge member.

5 Best Mode for Carrying Out the Invention

The apparatus of Fig. 1 comprises a vehicle designated the general reference numeral 1 and provided with a cab 2 and a platform 3. The cab 2 is of a width corresponding to approximately half the width of the platform 3. Next to the cab 2, the vehicle 1 is provided with a ramp 4 tiltably arranged in a manner not described in greater
10 detail. This ramp 4 can be positioned with a suitable inclination relative to the platform 3 of the vehicle 1 by means of an actuator 5. The ramp 4 extends substantially across the entire length of the vehicle 1, the front end 6 of said ramp being positioned in the area around the front side of the cab 2.

The ramp 4 carries a first conveyor part designated the general reference numeral 7,
15 and a second conveyor part 7 designated the general reference numeral 8. The first conveyor part 7 comprises an endless conveyor belt 9 shown in detail in Figs. 1 to 4 where parts of the four sides of the ramp have been removed for the sake of clarity. At the rear end of the ramp 4, this endless conveyor belt 9 runs from a lower path 10 to an upper path 11 or vice versa through a rear turning member 12 which is
20 provided with a plurality of rollers 13, 14 and 15. At its front end, the upper path 11 ends at a redirecting member designated the general reference numeral 16, cf. also Figs. 6 and 7. The redirecting member 16 comprises two interconnected rollers 17 and 18 redirecting the conveyor belt 9 to an intermediate path 19 continuing forwards towards the front end 6 of the ramp parallel to the upper path 11, but on a level
25 therebelow. This intermediate path 19 ends at a front turning member designated the general reference numeral 20 and comprising a single roller 21. The conveyor belt 9 returns to the lower path 10 through the latter single roller 21, said lower path 10

extending parallel to the upper path 11 and the intermediate path 19.

As shown in particular in Figs. 6 and 7, the redirecting member 16 is by means of a U-shaped bracket 22 connected to the rear end of the second conveyor part 8 when seen in the longitudinal direction of the vehicle 1. As the bracket 22 simultaneously
5 engages suitable guides not shown in greater detail along the sides 23 and 24 of the ramp 4, cf. Fig. 6, the reciprocating movement of the second conveyor part 8 relative to the longitudinal direction of the vehicle 1 implies that the redirecting member 16 follows said movement in such a manner that the upper conveyor path 11 of the first conveyor part 7 is of an increasing or decreasing length in response to the position of the rear end of the second conveyor part 8. Within the intermediate path 19,
10 the conveyor belt 9 is supported by a supporting plate 25, cf. Fig. 7, through suitable means (not shown) for reducing the friction.

Within the upper path 11, the conveyor belt 9 is supported by a supporting means 26 comprising a high number of interconnected lamellas 27, said lamellas being hinged-
15 ly interconnected along the longitudinal side farthest away from the conveyor belt 9. At one end, this supporting means 26 is connected to the redirecting member 16 in such a manner that it follows the movement of said redirecting member 16. In addition, the supporting means is adapted to move from a position immediately adjacent the lower path 10 to a position below the upper path 11 through the rear end adjacent
20 the turning member 12 of said supporting plate 25 in such a manner that the number of lamellas in the supporting state below the upper path 11 corresponds substantially to the entire length of the upper path 11. If necessary, the movement from one side to the opposite side of the supporting plate can be facilitated by means of guides not shown in greater detail. In addition, the end of the supporting means 26 farthest away
25 from the redirecting member 16 can also be connected to said redirecting member 16 through conventionally known means in such a manner that the end in question is subjected to a tractive force when the redirecting member 16 is moved downwards towards the rearmost turning member 12.

The second conveyor part 8 comprises a plurality of conveyor units 30, which all are substantially identical apart from the front conveyor unit 31. All the conveyor units 30 comprise a continuous belt 32, cf. Fig. 15, driven around suitable rollers 33, 34 and 35. These rollers are journaled in a frame 36 arranged on a support member 37.

- 5 The support member 37 is arranged on rollers 44. The conveyor units 30, 31 are interconnected by means of flexible coupling means which allow said conveyor units to be mutually turned both in horizontal and in vertical direction and be mutually displaced a short distance in the same directions. The coupling means are surrounded by bellow-shaped tubes of rectangular cross sections and with circumferential waves.
- 10 The frames 36 and the support members 37 are made of a suitable plastic material. The coupling means are furthermore adapted in a manner not described in greater detail to releasably couple the conveyor units 30, 31 together in such a manner that said conveyor units are easily replaceable. In addition, the bellow-shaped tube surrounding the coupling means provides an easy access to passage of a main distribut-
- 15 ing system with associated coupling equipment with the result that the individual conveyor units 30, 31 can be supplied with the desired energy, such as electric current in an easy manner. As mentioned above, the rearmost conveyor unit 30 is connected to the redirecting member 16 of the first conveyor part. The conveyor units are further provided with such a height that the conveying plane thereof, i.e.
- 20 the upper side of the conveyor belts 32, flushes with the upper path 11 of the endless conveyor belt 9, cf. Fig. 7.

- The front conveyor unit 31 comprises a rearwardly journaled conveyor flap 39, cf. in particular Figs. 13 and 14. In Fig. 13, the conveyor flap 39 is shown in two possible positions and in Fig. 14 three possible positions are shown. This conveyor
- 25 flap 39 comprises an endless conveyor belt 40 received in a manner not described in greater detail in a frame 41. At the back, the frame 41 is pivotally journaled in a manner not described in greater detail in a support member 42 also arranged on wheels 44, cf. Fig. 1. Jacks 43 are arranged between the frame 41 and the support

member 42, said jacks allowing an adjustment of the conveyor flap 39 in a position with a desired inclination.

At the front, the conveyor flap 39 is provided with a pivotally journalled conveyor front member 45. When seen from the side, this conveyor front member 45 is of a triangular cross section and also associated with an endless conveyor belt 46. This conveyor front member 45 can be set with a desired inclination relative to the conveyor flap 39 by means of members not shown in greater detail. The upper side of the conveyor belt 46 of the conveyor front member 45 is mainly positioned in a horizontal plane when the conveyor flap 39 is arranged with a predetermined inclination relative to the conveying direction of the remaining conveyor units.

The conveyor front member 45 comprises furthermore wheels 44 implying that said conveyor front member 45 can facilitate the support of the relatively far projecting conveyor flap 39 together with the support member 42.

Handles 47 and 48 are accommodated on the side of the frame 41 of the conveyor flap 39. These handles 47 and 48 allow an operator to manoeuvre the second conveyor part 8. These handles 47 and 48 are in addition adapted to be used as control means such a manner that by a suitable turning of said handles the operator can activate or actuate the various driving means not shown of the first and the second conveyor parts 7, 8.

An extendable bridge member 50 is mounted in connection with the front end of the ramp, cf. Figs. 8 to 12 and 20. This bridge member 50 is tiltable, cf. Fig. 20, and adapted to be arranged in a substantially horizontal position by means of an actuator 28 so as to be moved through an opening 51 into a cargo compartment 52 of an aircraft 53. In Figs. 8 to 12, the door usually closing the opening to a cargo compartment 52 has been removed. Then the bridge member forms a bridge between the ramp 4 and the floor 54 of the cargo compartment 52 directly inside the opening 51.

As illustrated in Fig. 8, the bridge member 50 is positioned directly below the front conveyor unit 31 when said conveyor unit is in the retracted state on the ramp. As illustrated in Fig. 9, the bridge member is moved forwards and through the opening 51 together with the front conveyor unit 31. This inward movement is carried out at
5 the same time as the inclination of the ramp 4 is adjusted so as to mate the floor 54 of the cargo compartment 52. When the bridge member has been positioned so as to rest on the floor 54 inside the cargo compartment 52, the front conveyor unit is lifted outwards to one side or the opposite side of said bridge member 50 in such a manner that from this position it can be pulled backwards or pushed forwards inside said
10 cargo compartment together with the subsequent conveyor units 30. Such a control or guiding of the front conveyor unit 31 and the succeeding conveyor units 30 is enhanced by a raised platform 55 with suitably shaped guiding sides 56 and 57, said conveyor units 30 and 31 sliding against said guiding sides during their movement. Suitable means not shown couple and uncouple the bridge member to and from the
15 front conveyor unit 31 in such a manner that together with said conveyor unit 31 the bridge member can be moved into and out of the opening 51 of the cargo compartment 52.

During the use of the apparatus according to the invention, the second conveyor part is pushed and moved into the cargo compartment in question, cf. Figs. 10 and 11,
20 where an operator can use said second conveyor part for the loading and unloading, respectively, cf. Figs. 16 and 17. As illustrated in Fig. 16, the operator can let the luggage 59 be pulled upwards over his legs by means of the conveyor flap 39 and subsequently by means of the conveyor front member 45 directly on top of a stack 60 of cargo items. During the unloading, the cargo items are pulled out of the stack
25 60 and placed on the front conveyor unit 31 and subsequently moved further out of the cargo compartment. During the use of the apparatus, the operator can, of course, position and use the conveyor flap 39 as he wishes. All the movements and stops as well as the adjustment of the length of the second conveyor part 8 inside the cargo compartment in question can by means of the handles 47 be controlled by the opera-

tor according to the prevailing circumstances inside said cargo compartment.

Figs. 18 and 19 illustrate a second embodiment of the apparatus according to the invention. Here the conveyor paths of both the first and the second conveyor part 7 and 8 are formed by a coherent row of conveyor units 30 and 31. The rear end of this row of conveyor units is received in a compartment 65 below the platform 3 of the vehicle 1, and from this position it is moved through the rear end of the vehicle upwards onto the ramp as the front end of the row is moved into the cargo compartment 52 of the aircraft 53. This embodiment is particularly suited for use in connection with particularly long cargo compartments 52 requiring a relatively high number of conveyor units.

The individual members, and especially the conveyor units of the second conveyor part 8 are made mainly of plastic materials in response to the desired strength. Furthermore, additional conveyors 61 and 62 can be mounted at the rear end of the apparatus so as to facilitate the transition between the equipment for the advancing and removal of luggage and the rear end of the first conveyor part 7. All driving means are connected to power sources in the vehicle 1 in a manner not described in greater detail.

Fig. 21 illustrates a second embodiment of a conveyor unit with a continuous belt 71 supported by rollers 72 and 73, where the first roller 72 is a driving roller supplied with electric energy as indicated through a conduit 116. The rollers 72 and 73 are journaled in a frame 75 by means of brackets 74 and 75. The frame 75 is at both sides provided with a pair of wheels 76 which are protected by means of screens 77 and 78, respectively, in such a manner that they are uncovered both at the top and at the bottom whereby the conveyor units can roll on suitable guides both in a position in which the conveyor belt 71 faces upwards and in a position in which said conveyor belt faces downwards, cf. Fig. 24. Screens 79 and 80 are mounted on the frame 75 along the sides of the conveyor belt 71.

The conveyor units are joined by means of coupling members 81 and 82 preferably made of die-cast aluminium. These coupling members 81 and 82 are pivotally jour-
nalled about axes 83 and 84 in two abutting conveyor units and mutually pivotally
journalled about an axis 85, a rubber unit 86 being placed between said coupling
5 members. This rubber unit 86 ensures both a straightening of the conveyor units
when said conveyor units are not subjected to a mutually turning load, and provides
a protected passage of electric conduits between the conveyor units through suitable
channels 87 and 88. The conveyor units carry members 115 co-operating with the
coupling members 81 and 82 in such a manner that they can only turn in one direc-
10 tion about the axes 83 and 84 away from a common plane through the conveyor units
parallel to their conveyor paths.

Fig. 22 illustrates a second embodiment of the front conveyor unit. This conveyor
unit is designated the general reference numeral 90 and comprises a conveyor flap
91. At the front, the conveyor flap 91 forms a bend in such a manner that the front
15 conveyor unit comprises a front member 92 permanently connected to the remaining
portion of the flap 91. The front conveyor unit 90 comprises an endless conveyor belt
93 extending over the front member through suitable rollers. In front of the continu-
ous belt 93, a pair of loosely journalled rollers 94 and 95 are provided. The conveyor
flap 91 comprises a frame 96, which at the back is pivotally journalled in a support
20 member 97. This support member 97 carries jacks 98 and supporting means 99 and
100 which are hingedly mounted on the support member 97 and displaceably mount-
ed on the frame 96. The support member 97 comprises wheels 101 rotatably arranged
about shafts which extend perpendicular to the plane of the support member 97. In
addition, one or more wheels 102, cf. Fig. 24, are provided below the front member
25 92 of the flap 91, said wheels being of the same type as the wheels 101.

Fig. 23 illustrates a telescoping bridge member 105 comprising guide means 106 and
107. These guide means 106 and 107 allow a guiding of the row of conveyor units
in the desired direction into the cargo compartment of an aircraft. The front guide

means 107 of the two guide means is arranged on a rotatable disc 108 which allows a setting of said guide means 107 in the desired direction. The guide means 106 and 107 are adapted to co-operate with suitable guide members not shown on the bottom side of the conveyor units.

- 5 Fig. 24 illustrates a third embodiment of the invention. Here the conveyor path of the first conveyor part 7 is formed by a first endless conveyor belt 110 mounted above the path of the conveyor units 70 between a compartment 111 and the bridge member 105. The first conveyor part 7 comprises furthermore a front conveying means with a second continuous belt 112, and which in front tapers in such a manner
10 that the cargo items being handled pass in a relatively easy manner to and from the first endless conveyor belt of the first conveyor part 7. As indicated in Fig. 24, rails 113 are provided in the compartment 111, and the conveyor units 70 can run on said rails by means of the wheels 76 while the endless conveyor belts face downwards. The moving of the conveyor units 70 to and from the compartment is carried out by
15 means of a driving, endless conveyor belt 114 which co-operates with the bottom side of the conveyor units 70 in a suitable manner, such as by way of friction.

The invention has been described with reference to preferred embodiments. Many modifications can be carried out without thereby deviating from the scope of the invention. The first and the second conveyor parts 7 and 8 and the associated ramp
20 4 can for instance be mounted on another equipment than the vehicle. In this connection the vital factor is that an adjustment can be performed to the positioning of the opening into the cargo compartment in question.

The invention has been described to be used in connection with aircrafts, but it can, of course, also be used in other situations where similar circumstances apply.

- 25 Instead of lamellas 27, the supporting means 26 can also be provided with rollers, and the conveyor units 30, 31 can be adapted to slide in suitable guides on the sides

of the ramp 4 instead of resting on their own wheels as long as they are positioned on said ramp 4.

Claims

1. A ground apparatus for loading and unloading an aircraft with a cargo compartment, said apparatus comprising:

5 a height-adjustable and tiltable first conveyor part which is adapted to convey cargo between an area outside said cargo compartment and a second conveyor ,

 said second conveyor having a first end and a second end and being at least partially extendable from said apparatus into said cargo compartment, said second
10 conveyor including a succession of conveyor units of which a first end conveyor unit is arranged at said first end,

 wherein each conveyor unit has a set of wheels and wherein the conveyor units are mutually interconnected means of coupling members that allow for a sideways mutual pivotal movement of said conveyor units,

15 characterised in that

 each of said conveyor units define a respective activatable conveyor path and in that said first end conveyor unit includes means for varying the inclination of said conveyor path of said first end conveyor unit,

 whereby a mutual sideways pivotal movement of at least two successive
20 conveyor units allow for a sideways movement of said first end conveyor unit.

2. An apparatus according to the preceding claim, said coupling members also allowing for a mutual pivotal movement of said conveyor units about an essentially
25 horizontal axis.

3. Apparatus as claimed in claim 1, characterised in that the first conveyor comprises a single endless conveyor belt with an upper path that defines a cargo-engaging surface.

30 4. An apparatus according to the preceding claim, wherein the length of the upper path of said conveyor belt is adjustable in response to the extension or retraction of said second conveyor.

5. An apparatus according to the preceding claim, characterised in that the endless conveyor belt extends between a front turning member placeable adjacent the aircraft and a rearmost turning member, where said first conveyor in addition
5 comprises an intermediate redirecting member reciprocating in the conveying direction and directing the conveyor belt from a rectilinear upper path between the rearmost turning member and the redirecting member to an intermediate path, parallel to the upper path, but on a level below said upper path between the redirecting member and the front turning member, whereby the conveyor belt between the front
10 turning member and the rearmost turning member extends below said upper and said intermediate path, and whereby the upper path forms at least part of the conveyor path of the first conveyor, and that the second end of said succession of conveyor units is connected to the redirecting member of the first conveyor and accordingly adapted to follow the reciprocating movement thereof, said conveyor units being
15 moved above the intermediate path of the first conveyor while positioned outside the aircraft.

6. An apparatus as claimed in claim 5, characterised in supporting means for supporting the endless conveyor belt of the first conveyor during its movement
20 within the upper path.

7. An apparatus according to any of the preceding claims, characterised in that the apparatus comprises a bridge member adapted to be supported by said aircraft and to support said conveyor units of the second conveyor during the extension thereof
25 from said apparatus into the cargo compartment.

8. An apparatus according to any of the preceding claims 1 or 2, characterised in that the first conveyor comprises a plurality of interconnected conveyor units each having a set of wheels and begin pivotally interconnected by means of respective
30 coupling means.

9. An apparatus according to any of the preceding claims, characterised in that the apparatus comprises a compartment for receiving said second conveyor.

10. An apparatus according to the preceding claim, characterised in that said first
5 conveyor is arranged above said compartment.

11. An apparatus according to any of claims 2-9, said apparatus having storage means for storing said second conveyor in a state wherein at least two successive conveyor units are mutually pivoted about said essentially horizontal axis.
10

12. An apparatus according to any of the preceding claims, characterised in a conveyor front member which is hingedly mounted to said first end conveyor unit and which can be set with a desired inclination relative to the conveyor path of the first end conveyor unit.
15

13. Apparatus according to any of the preceding claims, characterised in that each conveyor unit comprises an endless conveyor belt .

14. Apparatus according to the preceding claim wherein each endless conveyor belt
20 is driven by a driving roller and one or more further rollers, which are supported by a frame, which in turn is supported by a wheel-carrying support member.

15. An apparatus according to claim 13 or 14, wherein the width of the conveyor belt is greater than the distance between said rollers.
25

16. An apparatus according to any of the preceding claims, characterised in control means whereby an operator present inside the aircraft can control said second conveyor.

17. An apparatus according to any of claims 7 to 16 wherein the bridge member
30 comprises guiding means for guiding the second conveyor .

18. An apparatus according to any of the preceding claims wherein the first end conveyor unit comprises an endless conveyor belt.

19. An apparatus according to any of the preceding claims, characterised in driving
5 means cooperating with said second conveyor for extending said second conveyor from said apparatus, such as by way of friction.

20. An apparatus according to any of the preceding claims, characterised in that it is placed on a vehicle.