(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/20432 A1

(51) International Patent Classification[7]: G06F 1/20

(21) International Application Number: PCT/JP00/06067

(22) International Filing Date:
6 September 2000 (06.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/256567 10 September 1999 (10.09.1999) JP
2000/260712 30 August 2000 (30.08.2000) JP

(71) Applicant: SONY COMPUTER ENTERTAINMENT INC. [JP/JP]; 1-1, Akasaka 7-chome, Minato-ku, Tokyo 107-0052 (JP).

(72) Inventors: SASAKI, Dai; Sony Computer Entertainment Inc., 1-1, Akasaka 7-chome, Minato-ku, Tokyo 107-0052 (JP). AKAZAWA, Toru; Sony Computer Entertainment Inc., 1-1, Akasaka 7-chome, Minato-ku, Tokyo 107-0052 (JP).

(74) Agent: YAMAMOTO, Toshitake; 301, Ogikubo Sunny Garden, 28-9, Ogikubo 4-chome, Suginami-ku, Tokyo 167-0051 (JP).


(81) Designated States *(national)*: AU, BR, CA, CN, KR, MX, NZ, RU, SG.

(84) Designated States *(regional)*: European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published:
— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ELECTRONIC DEVICE WITH TEMPERATURE DETECTOR

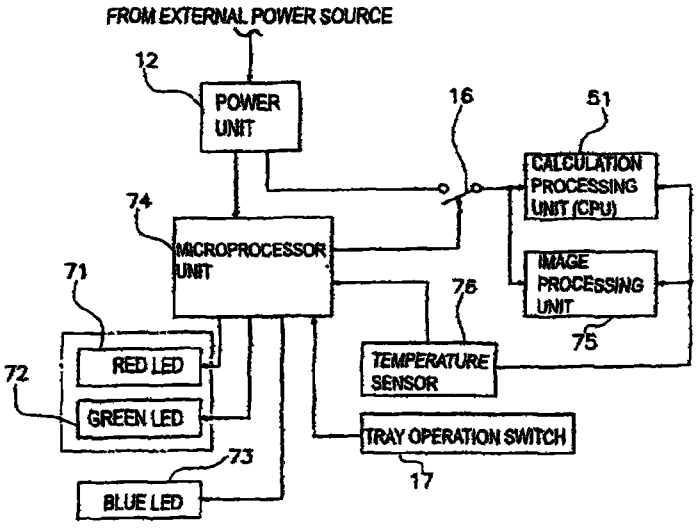

(57) Abstract: It is an object of the present invention to provide an electronic device which makes it possible to easily prevent malfunction of and damage to a calculation processing device. An electronic device according to the present invention has a temperature sensor (76) that detects temperature of a CPU (51), an image processing unit (75); and a microprocessor unit (74) that controls the supply of electric power from a power source unit (12) to the CPU (51), the image processing unit (75) according to the temperature detected by the temperature sensor (76). If the temperature of CPU (51) and/or the image processing unit (75) is detected by the temperature sensor (76) to be near the temperature that causes malfunction or damage to them, the supply of electric power to the CPU (51) and the image processing unit is automatically stopped by the microprocessor unit (74). It is possible to prevent malfunction and damage of the CPU (51) and the image processing unit (75) and to easily prevent the occurrence of runaway programs, etc.

WO 01/20432 A1