

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
23 January 2003 (23.01.2003)

PCT

(10) International Publication Number
WO 03/006889 A3

- (51) International Patent Classification⁷: **F24F 13/20**, 3/044
- (21) International Application Number: PCT/US02/22466
- (22) International Filing Date: 11 July 2002 (11.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/904,672 13 July 2001 (13.07.2001) US
- (71) Applicant: **CARRIER CORPORATION** [US/US]; Carrier Parkway, P.O. Box 4800, Syracuse, NY 13221 (US).
- (72) Inventors: **HERBECK, Christain, C.**; 91 Grandview Drive, Manchester, TN 37355 (US). **AUSTIN, Michael, W.**; 162 Barbara Circle, McMinnville, TN 37110 (US).
- (74) Agent: **HABELT, William, W.**; Carrier Corporation, Intellectual Property Dept., Carrier Parkway, P.O. Box 4800, Syracuse, NY 13221 (US).
- (81) Designated States (*national*): AU, BR, CA, CN, ID, IL, IN, JP, KR, MX, NO, NZ, PL, RU, SG, TR, YU, ZA.
- (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).
- Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (88) Date of publication of the international search report:
10 July 2003
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PANEL SEAL FOR AN AIR HANDLING UNIT

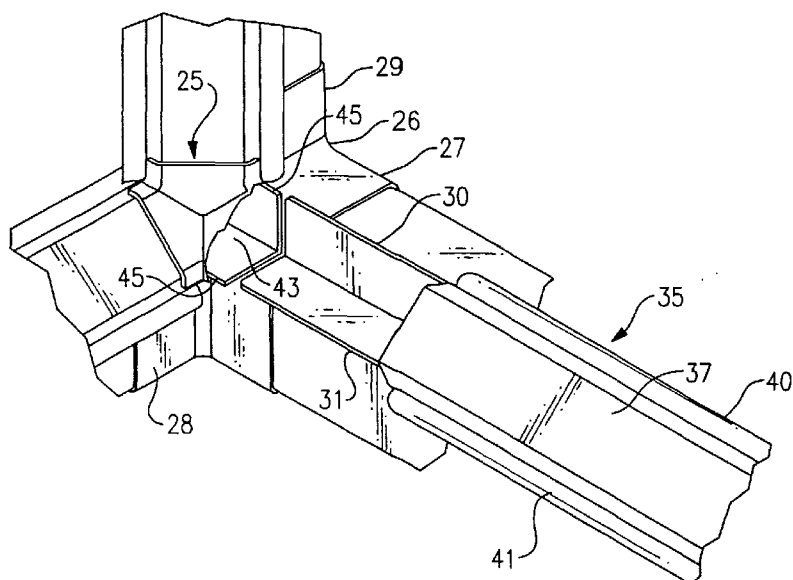

(57) Abstract: An air handling system (10) containing sections each having a framework made up of tubular structural elements defining each perpendicularly aligned openings each (11) of which shares a common structural element with its neighbors (11). The openings are closed by panels (12) that are latched into the openings (11). Said assemblies are installed around the perimeter of each rectangular opening. Each assembly includes a rigid plate (37) having two bulb seals (40, 41) extending along opposite edges of the plate that are coextruded with the plate. The plate is mounted at about a 45° angle along an inside corner edge (25) of each commonly shared structural element so that a seal on one side of the plate services one opening while the other seal services the adjacent opening. The plate is inserted into a slot formed in molded corner retainers that support the structural elements in assembly.



WO 03/006889 A3