



- (51) **International Patent Classification:**
B63B 27/14 (2006.01) *E06C 9/14* (2006.01)
E06C 1/56 (2006.01)
- (21) **International Application Number:**
PCT/NO2013/050080
- (22) **International Filing Date:**
3 May 2013 (03.05.2013)
- (25) **Filing Language:** Norwegian
- (26) **Publication Language:** English
- (30) **Priority Data:**
20120509 4 May 2012 (04.05.2012) NO
- (71) **Applicant:** NORTHWESTCOAST AS [NO/NO]; Post-
boks 79, N-6281 Sövik (NO).
- (72) **Inventors:** DYB, Kristian Bjarne; N-6280 Sövik (NO).
REITAN, Tor Arne; N-6280 Sövik (NO). TOVEN, Arve;
N-6280 Sövik (NO).
- (74) **Agent:** CURO AS; Industriveien 53, N-7080 Heimdal
(NO).
- (81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) **Title:** SHIPS LADDER

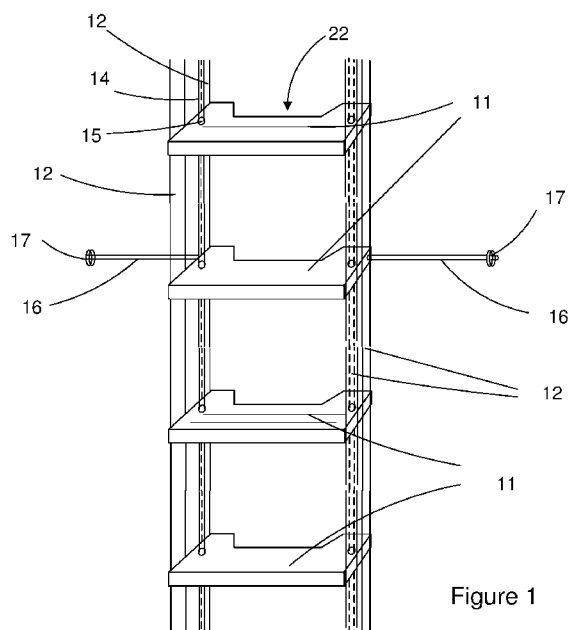


Figure 1

(57) **Abstract:** Ship's ladder comprising rigid steps (11) con-
nected to flexible suspension elements (12). Each short side
of each step (11) has at least two fastening points (13) for the
flexible suspension elements (12), and the steps are provided
with bores (15) which is traversed by a cord (14) adapted to
lower and hoist the ladder.