



- (51) International Patent Classification:
A61M 5/32 (2006.01)
- (21) International Application Number:
PCT/US2014/049962
- (22) International Filing Date:
6 August 2014 (06.08.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/863,098 7 August 2013 (07.08.2013) US
- (71) Applicant: UNITRACT SYRINGE PTY LTD [AU/AU];
Suite 3, Level 11, 1 Chifley Square, Sydney, New South
Wales 2000 (AU).
- (72) Inventors; and
- (71) Applicants : GUPTA, Jyoti [US/US]; 3363 Wood Valley
Road NW, Atlanta, Georgia 30327 (US). MCKEE,
Brandon J. [US/US]; 34 Oak Court, Nesquehoning,
Pennsylvania 18240 (US).
- (74) Agents: SYLVIA, Mary et al.; Wiley Rein LLP, Patent
Administration, 1776 K Street NW, Washington, District
of Columbia 20006 (US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.
- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: LUER CONNECTION ADAPTERS FOR SYRINGES

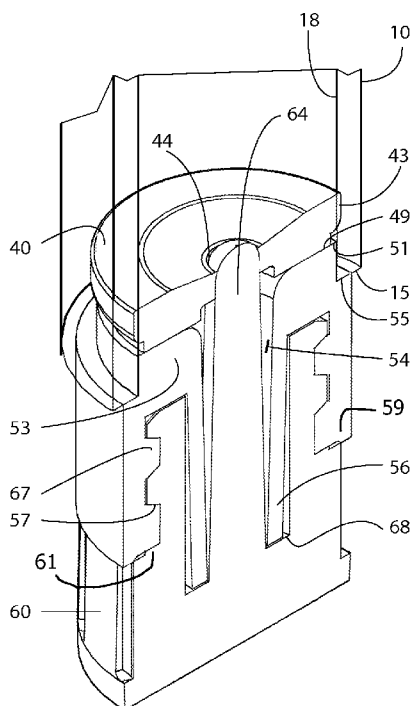


FIG. 1B

(57) Abstract: A connector mountable to a syringe barrel has a proximal barrel-engaging portion, a distal luer fitting portion, and a fluid aperture therethrough. The barrel-engaging portion of the connector includes an axial ledge configured to abut the axial distal edge of a glass syringe barrel. The connector facilitates mounting a luer assembly to the barrel. The luer assembly may be a tip cap, a luer needle assembly, or a luer needle-less assembly, having a complementary luer fitting for connection to the luer fitting portion of the connector. The connector and syringe may further include an immobile, compressible needle seal. The needle seal is adjacent to or engageable with the barrel-engaging portion of the connector.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*