

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 March 2003 (20.03.2003)


PCT

(10) International Publication Number
WO 03/023336 A1

- (51) International Patent Classification⁷: **G01H 13/00**, F02C 7/22
- (74) Agents: **MITCHELL, James, W.** et al.; General Electric Company, 3135 Easton Turnpike W3C, Fairfield, CT 06431 (US).
- (21) International Application Number: PCT/US01/28727
- (22) International Filing Date:
13 September 2001 (13.09.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant: **GENERAL ELECTRIC COMPANY** [US/US]; 1 River Road, Schenectady, NY 12345 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (72) Inventors: **SHAW, Mark, Richard**; 6136 Weber Oaks Drive, Loveland, OH 45140 (US). **VONDERAU, Christen, Staton**; 3702-F East Patterson Road, Beavercreek, OH 45430 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHODS AND APPARATUS FOR MODEL BASED SHROUDED BELLOWS STIFFNESS DETERMINATIONS

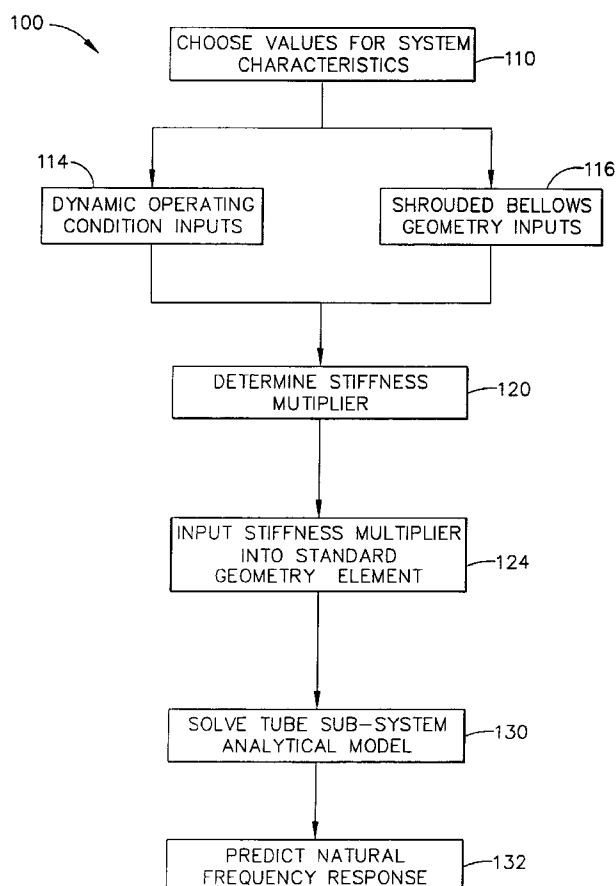

(57) Abstract: A system predicts natural frequency responses (132) in tube sub-systems (10) including shrouded bellows components (12). The system determines a stiffness multiplier from input values (110) and uses the determined flexibility factor to determine the natural frequency responses. The input values include geometry inputs (116) and dynamic operating condition inputs (114). The flexibility factor is determined with a regression equation. The regression equation, based on dynamic stiffness test data of various shrouded bellows configurations, permits the system to characterize the shrouded bellows using a geometry element that includes an assigned flexibility factor based on dynamic stiffness test data.



WO 03/023336 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.