

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2011 年 3 月 24 日(24.03.2011)

(10) 国際公開番号
WO 2011/033895 A1

- (51) 国際特許分類:
F2IS 2/00 (2006.01) *F21Y 103/00* (2006.01)
G02F 1/13357 (2006.01)
- (21) 国際出願番号: PCT/JP2010/063977
- (22) 国際出願日: 2010 年 8 月 19 日(19.08.2010)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2009-215036 2009 年 9 月 16 日(16.09.2009) JP
- (71) 出願人 (米国を除く全ての指定国について):
シャープ株式会社(SHARP KABUSHIKI KAISHA)
[JP/JP]; 〒5458522 大阪府大阪市阿倍野区長池町
2 2 番 2 2 号 Osaka (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 黒水 泰守
(KUROMIZU Yasumori). 中村 真由美(NAKAMU-
RA Mayumi).
- (74) 代理人: 特許業務法人暁合同特許事務所(AKAT-
SUKI UNION PATENT FIRM); 〒4600008 愛知県


名古屋市中区栄二丁目 1 番 1 号 日土地名古
屋ビル 5 階 Aichi (JP).

- (81) 指定国 (表示のない限り、全ての種類の国内保
護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA,
BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO,
CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR,
LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH,
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST,
SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保
護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW,
MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ
(AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT,
NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF,
BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE,
SN, TD, TG).

[続葉有]

(54) Title: LIGHTING DEVICE, DISPLAY APPARATUS, AND TELEVISION RECEIVER

(54) 発明の名称: 照明装置、表示装置、及びテレビ受信装置

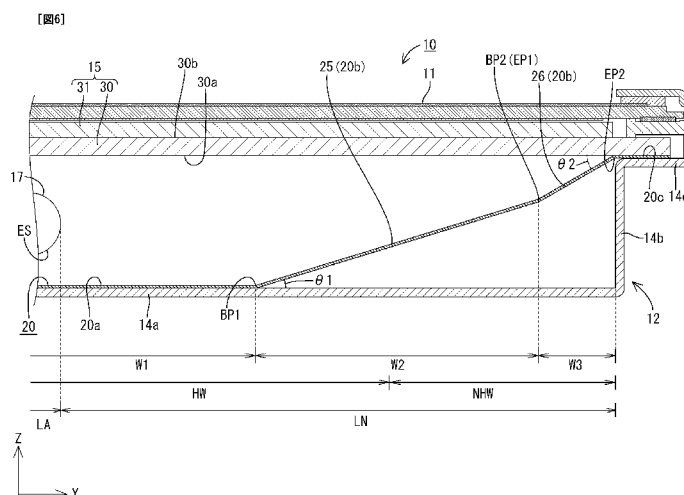

(57) Abstract: In order to suppress the occurrence of uneven luminance in a backlight device, the backlight device (12) is provided with a hot-cathode tube (17), a chassis (14) that has a bottom plate (14a) disposed on the side opposite to the light emission side with respect to the hot-cathode tube (17) and houses the hot-cathode tube (17), a diffuser plate (30) that is an optical member (15) disposed on the light emission side with respect to the hot-cathode tube (17), and a reflection sheet (20) that is disposed in the chassis (14), has a rising portion (20b) rising from the bottom plate (14a) side to the diffuser plate (30) side, and reflects light, wherein the rising portion (20b) is configured to rise in stages and comprises at least a first rising portion (25) the rising base end of which is the bottom plate (14a) that is a base point, and a second rising portion (26) the rising front end of which reaches the diffuser plate (30), and the angle (θ2) which the second rising portion (26) forms with the diffuser plate (30) is larger than the angle (θ1) which the first rising portion (25) forms with the bottom plate (14a).

(57) 要約:

[続葉有]



WO 2011/033895 A1