(12) 특허협력조약에 의하여 공개된 국제출원

(19) 세계지식재산권기구
국제사무국

(43) 국제공개일
2011 년 8 월 4 일 (04.08.2011)

PCT

(10) 국제공개번호
WO 2011/093574 A2

(51) 국제특허분류:
H04N 7/18 (2006.01) *H04N 5/225* (2006.01)

(21) 국제출원번호: PCT/KR2010/006942

(22) 국제출원일: 2010 년 10 월 11 일 (11.10.2010)

(25) 출원언어: 한국어

(26) 공개언어: 한국어

(30) 우선권정보:
10-2010-0009028 2010 년 2 월 1 일 (01.02.2010) KR

(71) 출원인 (US 을(를) 제외한 모든 지정국에 대하여): **주식회사 영국전자 (YOUNGKOOK ELECTRONICS, CO., LTD.)** [KR/KR]; 서울특별시 서초구 서초동 1432-10, 137-070 Seoul (KR).

(72) 발명자; 겸
(75) 발명자/출원인 (US 에 한하여): **김배훈 (KIM, Bae Hoon)** [KR/KR]; 서울특별시 서초구 우면동 67 번지 한라아파트 106 동 301 호, 137-900 Seoul (KR). **이지환 (LEE, Jee hwan)** [KR/KR]; 경기도 광명시 광명 2 동 114-8 번지 우성빌라 101 호, 423-012 Gyonggi-do (KR).

(74) 대리인: **특허법인 다인 (DYNE PATENT & LAW FIRM)**; 서울시 강남구 역삼동 645-21 신명빌딩 3 층, 135-910 Seoul (KR).

(81) 지정국 (별도의 표시가 없는 한, 가능한 모든 종류의 국내 권리의 보호를 위하여): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) 지정국 (별도의 표시가 없는 한, 가능한 모든 종류의 역내 권리의 보호를 위하여): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), 유라시아 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 유럽 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[다음 쪽 계속]

(54) **Title**: TRACKING AND MONITORING CAMERA DEVICE AND REMOTE MONITORING SYSTEM USING SAME

(54) **발명의 명칭** : 추적감시용 카메라 장치 및 이를 채용하는 원격 감시 시스템

[Fig. 1]

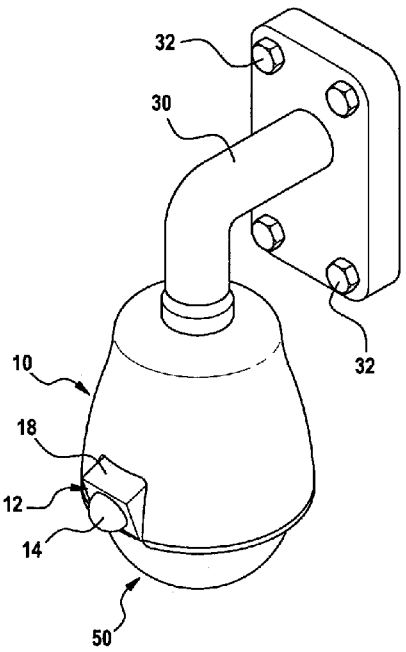

(57) **Abstract**: A camera device can smoothly perform an operation for monitoring an entire situation over a wide area and an intensive monitoring and tracking operation for a specific area or a specific object by integrating a wide monitoring camera and an intensive monitoring camera, and a shadow area is not generated in an area directly below. The camera device of the present invention includes a main frame, a first camera unit, and a second camera unit. The main frame includes a lens location surface of which a normal is directed to a lower part of the outside. The first camera unit comprises: a wide-angle lens which is provided at the main frame and is arranged on the lens location surface to direct an optical axis thereof to the lower part of the outside; and a first image sensor for converting incident light received through the wide-angle lens to an electric signal, so as to photograph circumferential images including a point directly underneath the monitoring camera device. The second camera unit comprises a second image sensor and is provided to rotate horizontally and vertically to the main frame. Desirably, the main frame is protruded from an outer surface to the outside and includes a supporting protrusion having a front surface facing the outside in the downward direction and the wide-angle lens can be attached to the front surface of the supporting protrusion.

(57) 요약서:

[다음 쪽 계속]

WO 2011/093574 A2