

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2007 (10.05.2007)

PCT

(10) International Publication Number
WO 2007/052250 A3

(51) International Patent Classification:
B23D 77/00 (2006.01)

(21) International Application Number:
PCT/IL2006/001199

(22) International Filing Date: 18 October 2006 (18.10.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
171791 6 November 2005 (06.11.2005) IL

(71) Applicant (for all designated States except US): **ISCAR LTD.** [IL/IL]; P.O. Box 11, 24959 Tefen (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HECHT, Gil** [IL/IL]; 30/18 Ahad Ha'am Street, 22443 Nahariya (IL). **ELIEZER, Oleg** [IL/IL]; 7/18 Hasharon Street, 22224 Nahariya (IL). **COHEN, Tsur** [IL/IL]; 84 Hatzav Street, 25147 Kfar Vradim (IL).

(74) Agent: **ISCAR LTD., PATENT DEPARTMENT**; P.O. Box 11, 24959 Tefen (IL).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: ROTARY CUTTING TOOL

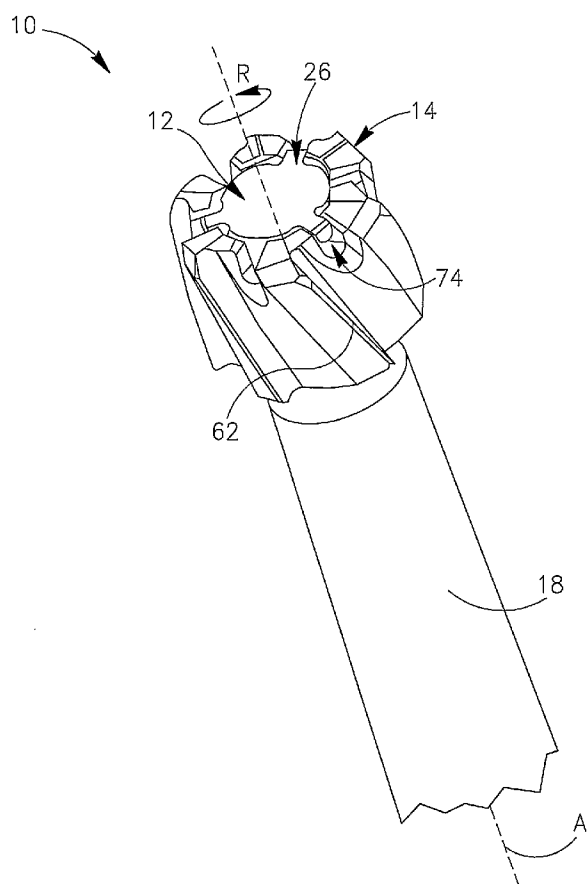

(57) Abstract: A rotary cutting tool comprises a cutting head (14) which is axially secured to a forward end of a shank (18) by a locking screw (12). At least one radially extending locking wing (26) of the locking screw is located in at least one radial recess of the cutting head or at least one radially extending passage (74) is formed between the locking screw and the cutting head.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

12 July 2007