



(51) International Patent Classification:

H01L 21/677 (2006.01) H01L 21/84 (2006.01)
H01L 21/67 (2006.01) H01L 29/786 (2006.01)
H01L 21/268 (2006.01) H01L 21/02 (2006.01)

(21) International Application Number:

PCT/NL2013/050486

(22) International Filing Date:

3 July 2013 (03.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2009147 6 July 2012 (06.07.2012) NL

(71) Applicant: **BESI NETHERLANDS B.V.** [NL/NL]; Ratio
6, NL-6921 RW Duiven (NL).

(72) Inventor: **HUISSTEDE, Jurgén Hendrikus Gerhardus**;
Oude Haaksbergerweg 18, NL-7471 LM Goor (NL).

(74) Agent: **VAN DEN HEUVEL, Ir. H.Th.**; Julianaplein 4,
NL-5211 BC 's Hertogenbosch (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE AND METHOD FOR SEPARATING, AT LEAST PARTIALLY DRYING AND INSPECTING ELECTRONIC COMPONENTS

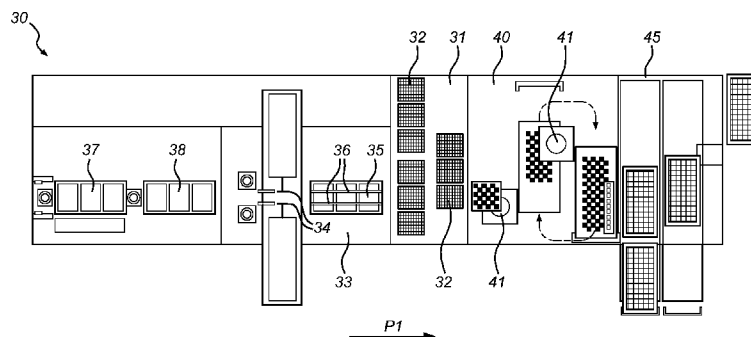


Fig. 3

(57) Abstract: The invention relates to a device for separating, at least partially drying and inspecting electronic components, comprising: separating means, a carrier for the electronic components, a heating source for generating radiant heat, displacing means for displacing the carrier for the electronic components relative to the heating source, and visual inspection means. The heating source is configured to generate radiant heat in order to selectively heat and evaporate moisture present on the separated electronic components.