




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E02F 5/10	A1	(11) International Publication Number: WO 99/23314 (43) International Publication Date: 14 May 1999 (14.05.99)
(21) International Application Number: PCT/IB98/01833 (22) International Filing Date: 3 November 1998 (03.11.98) (30) Priority Data: 08/964,361 4 November 1997 (04.11.97) US (71) Applicant: COFLEXIP, S.A. [FR/FR]; 23, avenue de Neuilly, F-75116 Paris (FR). (72) Inventors: ADAMSON, James, E.; 8000 South Flagler Drive, West Palm Beach, FL 33405 (US). MACHIN, Jonathan, B.; 5 Balnacoll, Rhu-Na-Haven Road, Aboyne, Aberdeenshire AB34 5JD (GB).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <i>Article 19 amendments enclosed (see inside)</i> <i>ICM L</i> <i>23/9/99</i>	

(54) Title: STEERABLE UNDERWATER PLOW

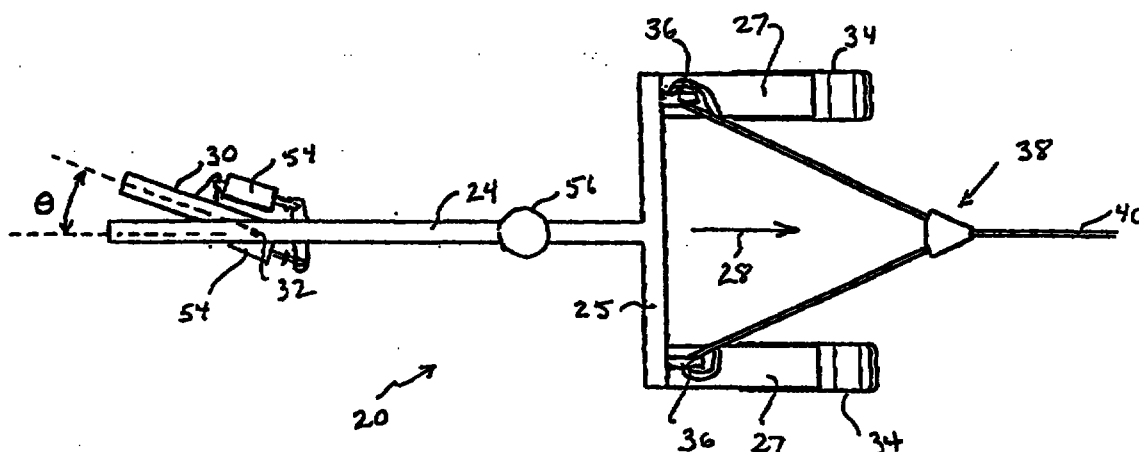

(57) Abstract

A steerable plow (20, 20a-20d) configured for underwater towing along a sea bed. The plow includes a plow body (24) and a soil cutting member (26) attached to the body. The soil cutting member is configured for forming a trench in the sea bed in a forward direction of travel of the plow. A tow member (36) is attached to the body for attaching the plow to a tow cable. The tow member defines an effective tow point which is forward of the cutting member. A steering device (30, 44, 48) is provided for creating a steering moment capable of varying the direction of travel. The steering device is positioned rearwardly relative to said tow member.