



(51) International Patent Classification:
B66B 9/187 (2006.01) **B66B 7/06** (2006.01)

(21) International Application Number:
PCT/FI2010/051055

(22) International Filing Date:
17 December 2010 (17.12.2010)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20090512 31 December 2009 (31.12.2009) FI

(71) Applicant (for all designated States except US): **KONE CORPORATION** [FI/FI]; Kartanontie 1, FI-00330 Helsinki (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PLATHIN, Antti** [FI/FI]; Hangontie 49 B 6, FI-05840 Hyvinkää (FI).

(74) Agent: **KONE CORPORATION/PATENT DEPARTMENT**; PI 677, FI-05801 Hyvinkää (FI).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD IN THE MANUFACTURE OF AN ELEVATOR

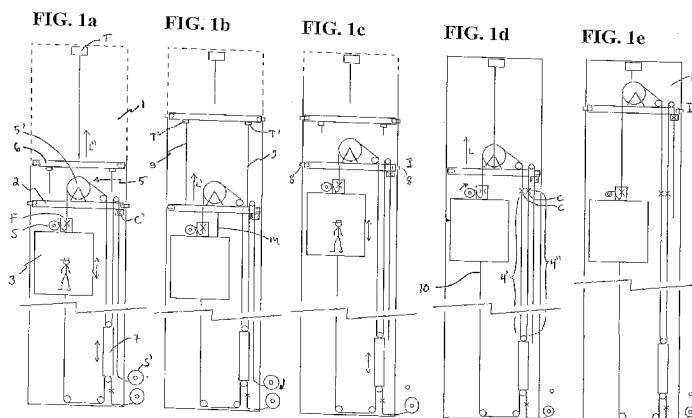

(57) Abstract: In the method according to the invention in the manufacture of an elevator a partially completed elevator is used during the manufacture of the elevator, which elevator comprises a platform (2) that is in the elevator hoistway (1) during the manufacture of the elevator for supporting the elevator car (3) via hoisting roping (4), and hoisting roping (4) supported by the aforementioned platform (2) and hanging in the elevator hoistway (1), in which method a lift is performed, in which the aforementioned platform is lifted to extend the operating area of the elevator car (3) below the aforementioned platform (2) to reach to higher in the elevator hoistway (1). During the lifting of the hoisting roping (4), the downward-pulling force exerted on the platform (2) is reduced by transferring a part of the roping (4) supported by the platform (2) to be supported by a bracket (c) that is separate from the platform (2) for at least the duration of the lifting of the platform (2).