



## (51) International Patent Classification:

*A61B 5/04* (2006.01) *H04B 13/00* (2006.01)  
*A61B 5/0408* (2006.01) *G06F 19/00* (2011.01)

(74) Agent: **FIELD, Bret**; Bozicevic Field & Francis LLP,  
1900 University Avenue, Suite 200, East Palo Alto, California 94303 (US).

## (21) International Application Number:

PCT/US2011/023013

## (22) International Filing Date:

28 January 2011 (28.01.2011)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

61/300,435 1 February 2010 (01.02.2010) US  
61/378,878 31 August 2010 (31.08.2010) US

(71) Applicant (for all designated States except US): **PROTEUS BIOMEDICAL, INC.** [US/US]; 2600 Bridge Parkway, Suite 101, Redwood City, California 94065 (US).

## (72) Inventors; and

(75) Inventors/Applicants (for US only): **ZDEBLICK, Mark** [US/US]; 300 La Mesa Drive, Portola Valley, California 94028 (US). **HUTCHISON, James** [US/US]; 4384 Silva Court, Palo Alto, California 94306 (US). **ARNE, Lawrence** [US/US]; 250 Iris Way, Palo Alto, California 94303 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: DATA GATHERING SYSTEM

FIG. 1

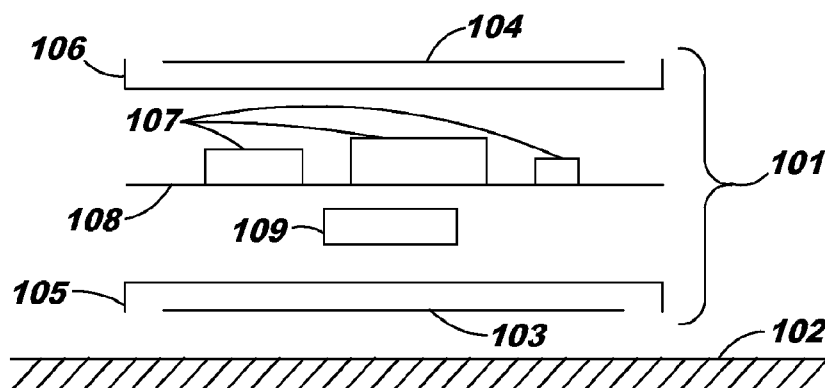

(57) Abstract: A device for gathering data has first and second electrodes. The first electrode is coupled to a surface of interest, and the second electrode is coupled to "everything else" or "the air". The first electrode is shielded from the second, and from most sources of parasitic capacitance, by a shield that is driven by an active driver that drives the shield to track, and ideally to match, the instantaneous potential of the electrode. The second electrode is likewise shielded in a similar way from most sources of parasitic capacitance. These shields likewise help to limit the extent to which RFI from the device electronics couples with either of the electrodes. In this way the sensing device achieves a markedly better signal-to-noise ratio at frequency bands of interest.

