



- (51) International Patent Classification:
B63B 27/14 (2006.01)
- (21) International Application Number:
PCT/NL2014/050713
- (22) International Filing Date:
14 October 2014 (14.10.2014)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data:
2011603 14 October 2013 (14.10.2013) NL
- (71) Applicant: INNOVATIVE INPUT B.V. [NL/NL]; Ringdijk 396, NL-2983 GS Ridderkerk (NL).
- (72) Inventor: KALKMAN, Pieter; Brugweg 78, NL-2741 KV Waddinxveen (NL).
- (74) Agent: NEDERLANDSCH OCTROOIBUREAU; J.W. Frisolaan 13, NL-2517 JS The Hague (NL).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: WALKWAY INSTALLATION, AS WELL AS A VESSEL WITH SUCH A WALKWAY INSTALLATION

Fig. 1

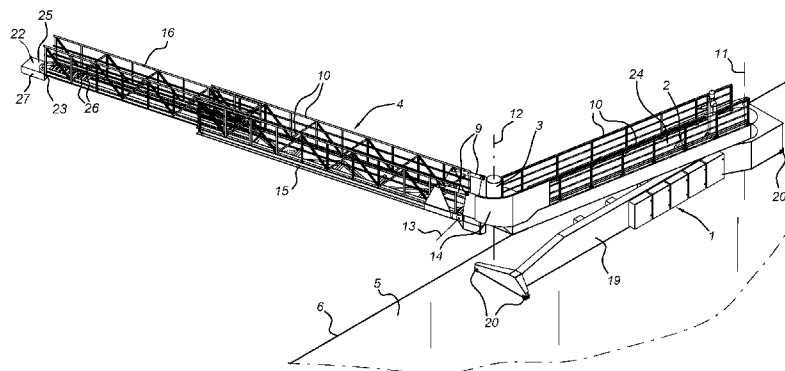

(57) Abstract: A walkway installation comprising a base (1) intended to be fastened to a support construction, such as to the deck (5) of a ship (6), as well as a base bridge part (2) that is connected at one end so it can be rotated around an upright base axis of rotation (11) with the base. Furthermore, a main bridge part (4) is provided on the other end of the base bridge part (1) as well as a hinge construction between the base bridge part (1) and the main bridge part (2). The hinge construction has an upright main axis of rotation (12) and an auxiliary axis of rotation (13) aligned transversely to the upright main axis of rotation and transversely to the main bridge part. By rotating the gangplank parts, the installation may be adjusted in a reliable and quick way in relation to a fixed object or another vessel.

