(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
14 March 2013 (14.03.2013)

WIPO | PCT

(10) International Publication Number
WO 2013/033769 A1

(51) International Patent Classification:
B65D 90/00 (2006.01) *E05B 65/00* (2006.01)

(21) International Application Number:
PCT/AU2012/001054

(22) International Filing Date:
6 September 2012 (06.09.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2011903687 9 September 2011 (09.09.2011) AU

(72) Inventor; and
(71) Applicant : **BEAN, David Robin** [AU/AU]; 386 Bourke Street, Surry Hills, NSW 2010 (AU).

(74) Agent: **SPRUSON & FERGUSON**; GPO Box 3898, Sydney, New South Wales 2001 (AU).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report (Art. 21(3))*

(54) **Title**: A LOCKING ASSEMBLY

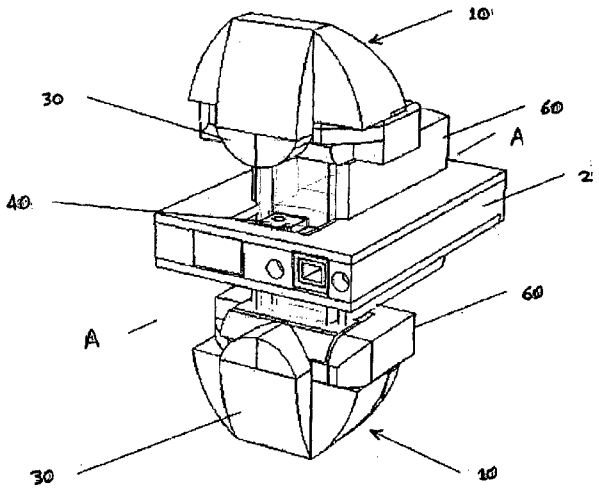


Figure 5

(57) **Abstract**: A locking assembly (1) having a base (2); a pair of arms (4) extending longitudinally away from the base in opposing directions. Each arm has a proximal end engageable with the base and a distal end remote the base. The distal end of the arm has a locking means (10) movable relative to the base and adapted to engage a recess (20) of an object (22) to lock the object to the as - sembly.

WO 2013/033769 A1