

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
25 May 2023 (25.05.2023)



(10) International Publication Number
WO 2023/089048 A1

(51) International Patent Classification:
G01F 1/66 (2006.01) *G01F 15/18* (2006.01)
G01F 1/667 (2022.01)

(21) International Application Number:
PCT/EP2022/082309

(22) International Filing Date:
17 November 2022 (17.11.2022)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
21208708.4 17 November 2021 (17.11.2021) EP

(71) Applicant: LANDIS+GYR GMBH [DE/DE]; Humboldt-
straße 64, 90459 Nürnberg (DE).

(72) Inventors: STUREK, Robert Herr; 69242 Mühlhausen
(DE). MOSSNER, Johannes Herr; 91315 Höchstadt (DE).

(74) Agent: MARKS & CLERK LLP; 15 Fetter Lane, London
EC4A 1BW (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE,
KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU,
LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(54) Title: THROUGHFLOW MEASURING DEVICE HAVING A HOUSING AND MEASURING INSERT

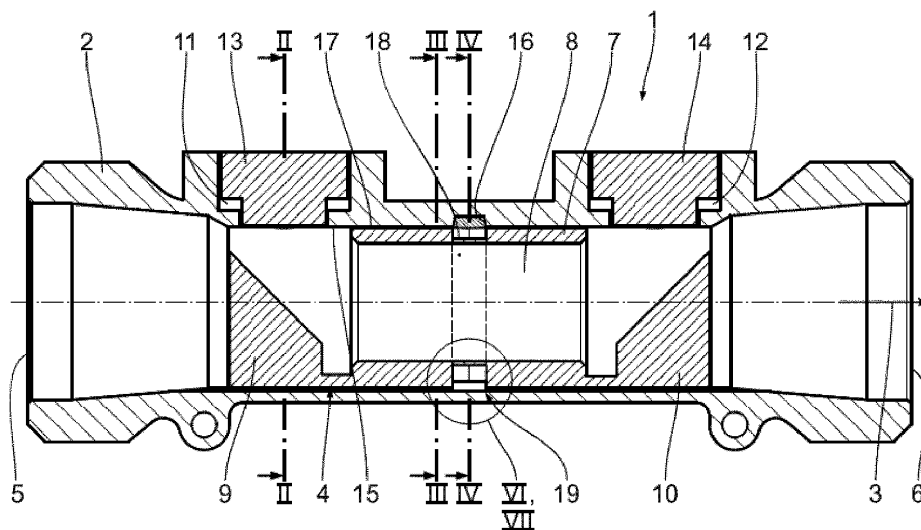


Fig. 1

(57) Abstract: The throughflow measuring device (1) is intended for a liquid or gaseous medium and has a housing (2) and a measuring insert (4) which can be inserted in the housing (2) and which has a measuring path (8). The measuring insert (4) has a throughflow direction (3) in which the medium to be detected flows through the measuring path (8) during operation. The housing (2) has an inner housing wall (15) which is provided with a housing assembly groove (16) which extends perpendicularly to the throughflow direction (3). The measuring insert (4) has a measuring insert outer wall (17) which is provided with a measuring insert assembly groove (18) which extends perpendicularly to the throughflow direction (3). The housing (2) and the measuring insert (4) in the assembled state are orientated relative to each other at least in the throughflow direction (3) and are fixed in the position orientated relative to each other by means of a securing element 10(19), wherein, in order to fix the housing (2) and the measuring insert (4) in the position orientated

WO 2023/089048 A1

[Continued on next page]

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

relative to each other, at least a first partial region of the securing element (19) engages in the housing assembly groove (16) and at least a second partial region of the securing element (19) engages in the measuring insert assembly groove (18).