




[図2]

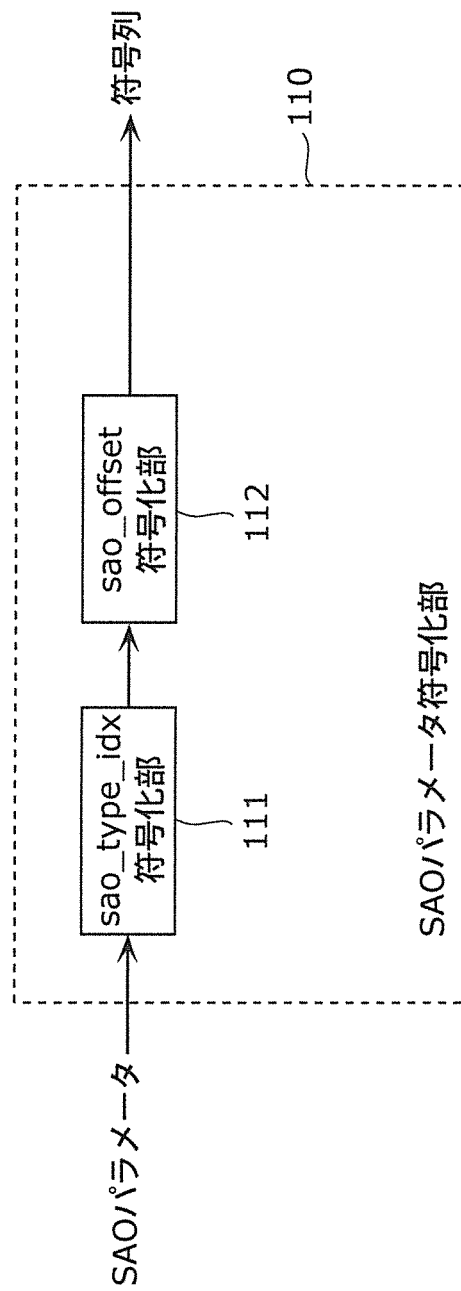


[図3]

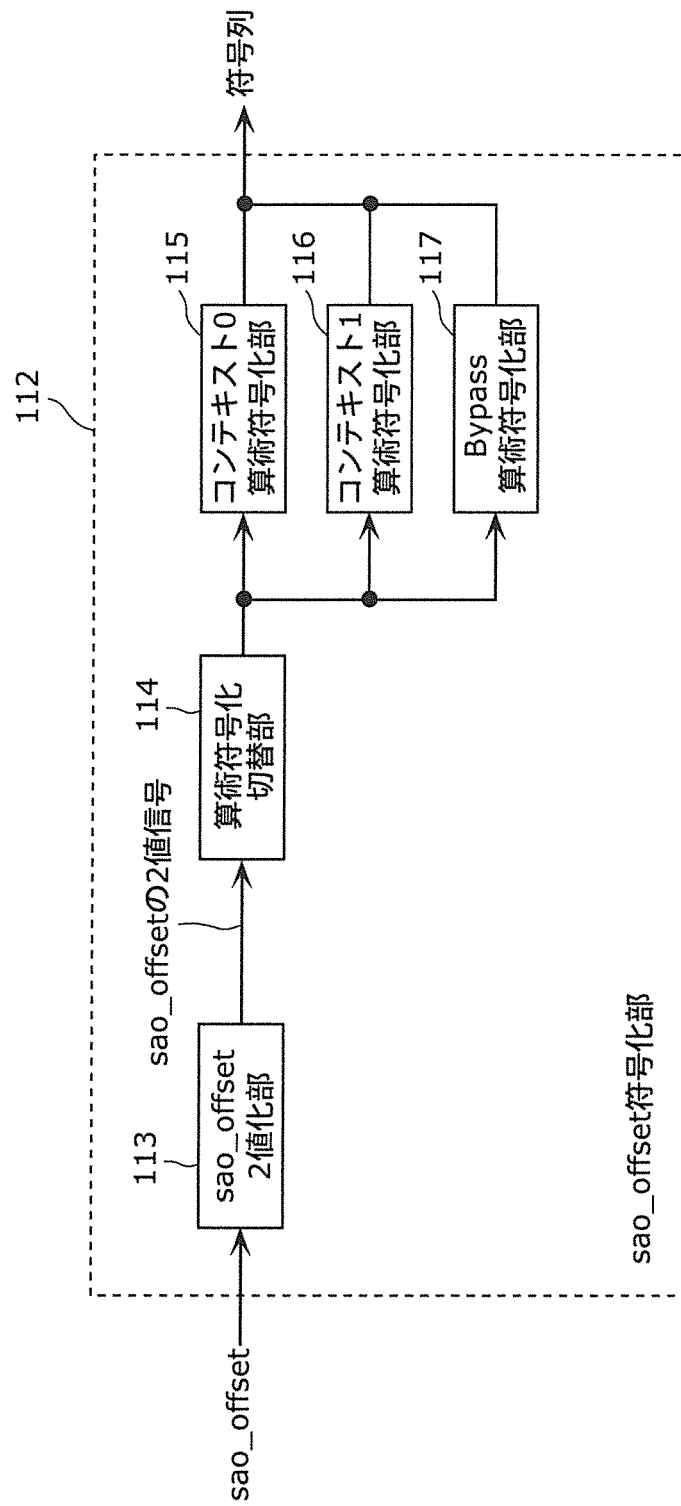


[図4]

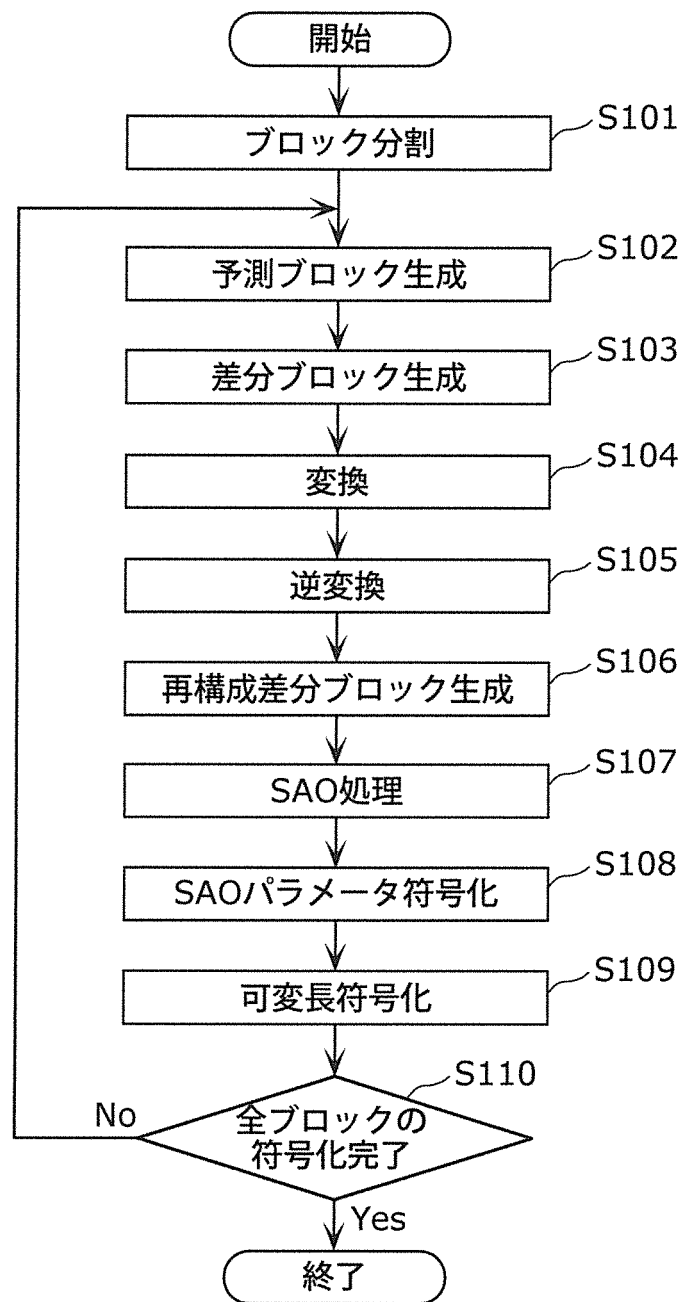


[図5]

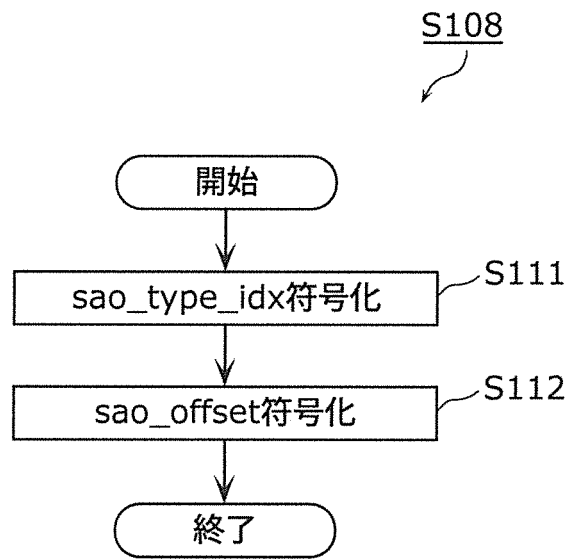

[図6A]

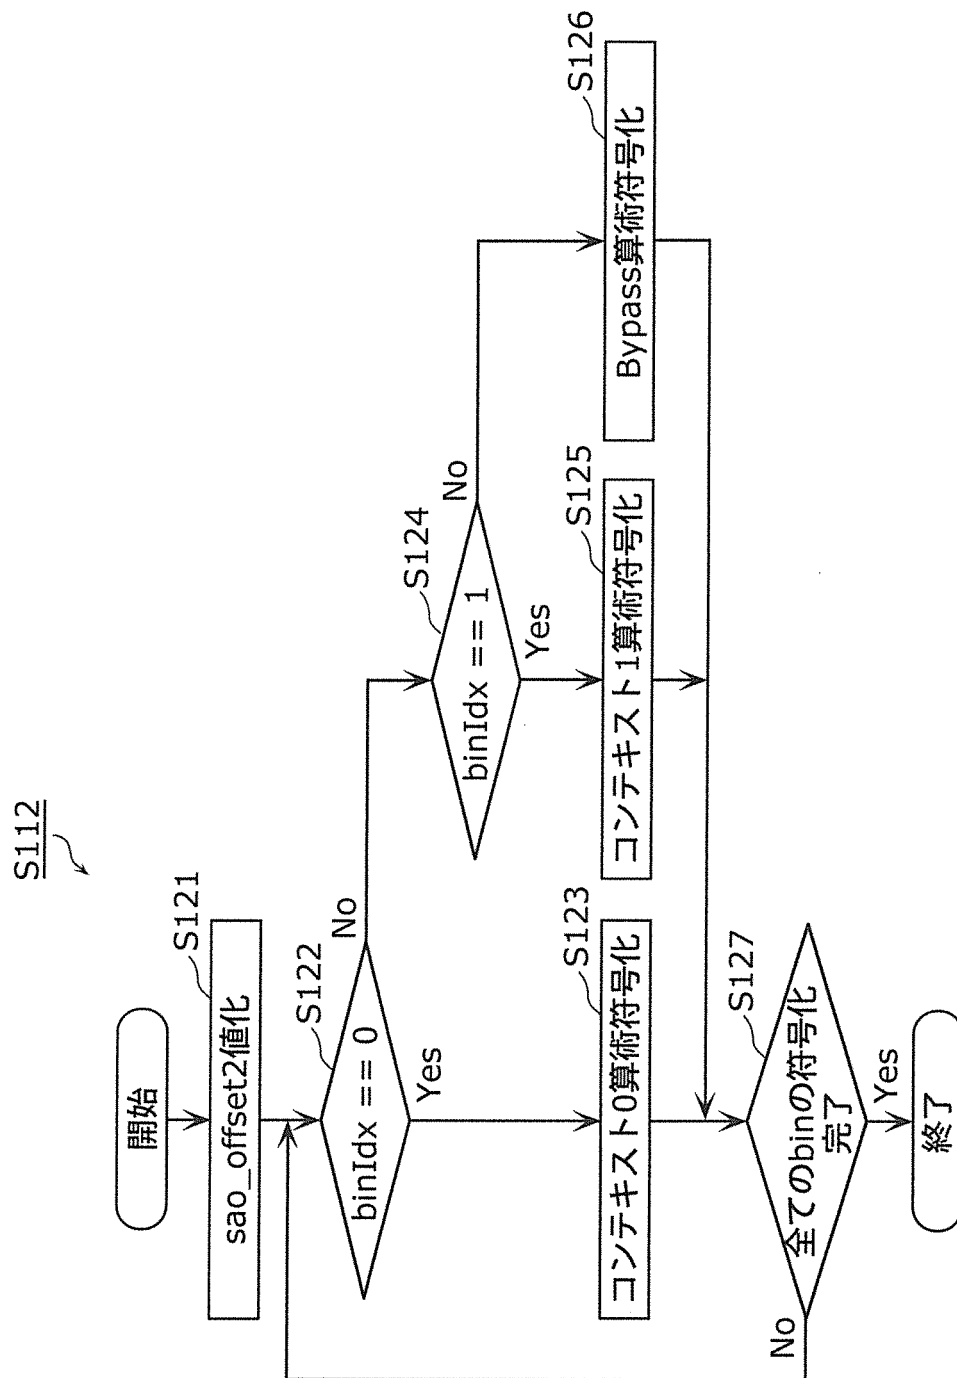

[図6B]

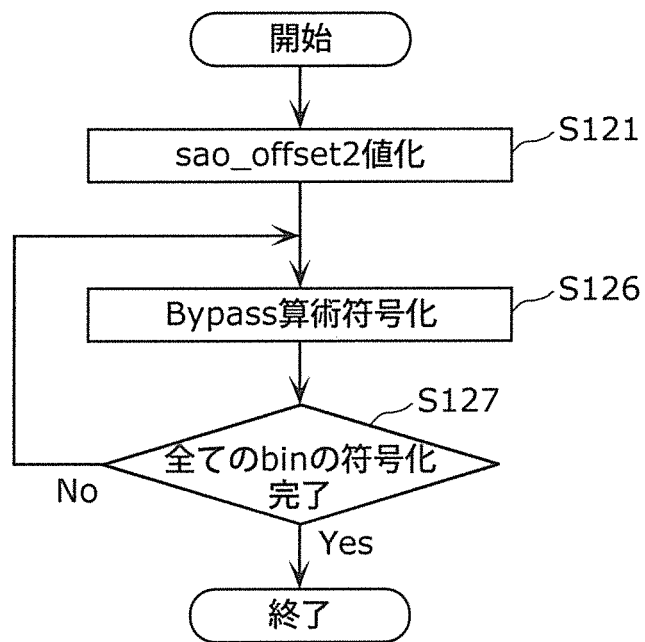

[図7]

多値信号	2値信号						
	binIdx						
	0	1	2	3	4	5	6
0	0						
1	1	0					
2	1	1	0				
3	1	1	1	0			
4	1	1	1	1	0		
5	1	1	1	1	1	0	
6	1	1	1	1	1	1	0
7	1	1	1	1	1	1	1

[図8]


	binIdx					
	0	1	2	3	4	5
実施例1	コンテキスト0	コンテキスト1	Bypass			
変更1	コンテキスト0	Bypass				
変更2	Bypass					

6


[図9]

	Main			HE10		
	AI	RA	LB	AI	RA	LB
実施例1	0.00	-0.01	0.02	0.01	0.05	0.04
変更1	0.01	0.04	0.08	0.01	0.07	0.07
変更2	0.03	0.04	0.07	0.01	0.06	0.07


[図10]

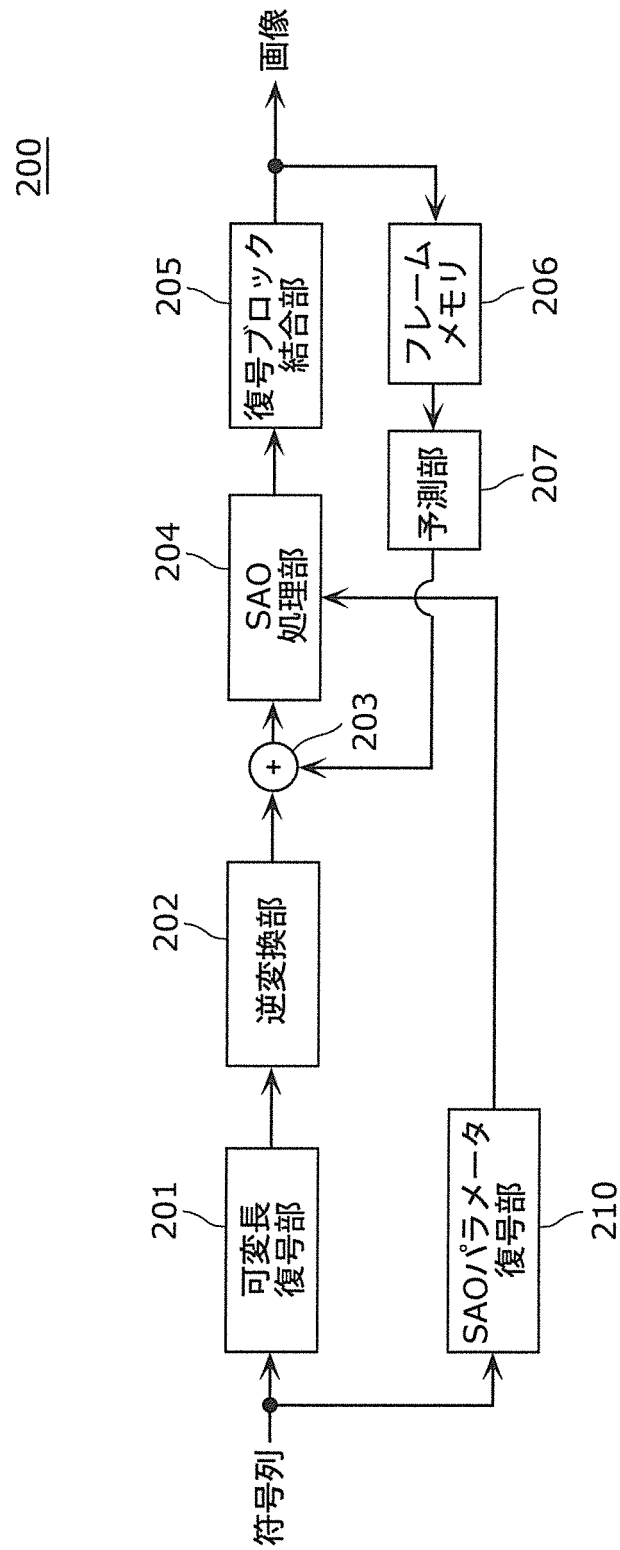


[図11]

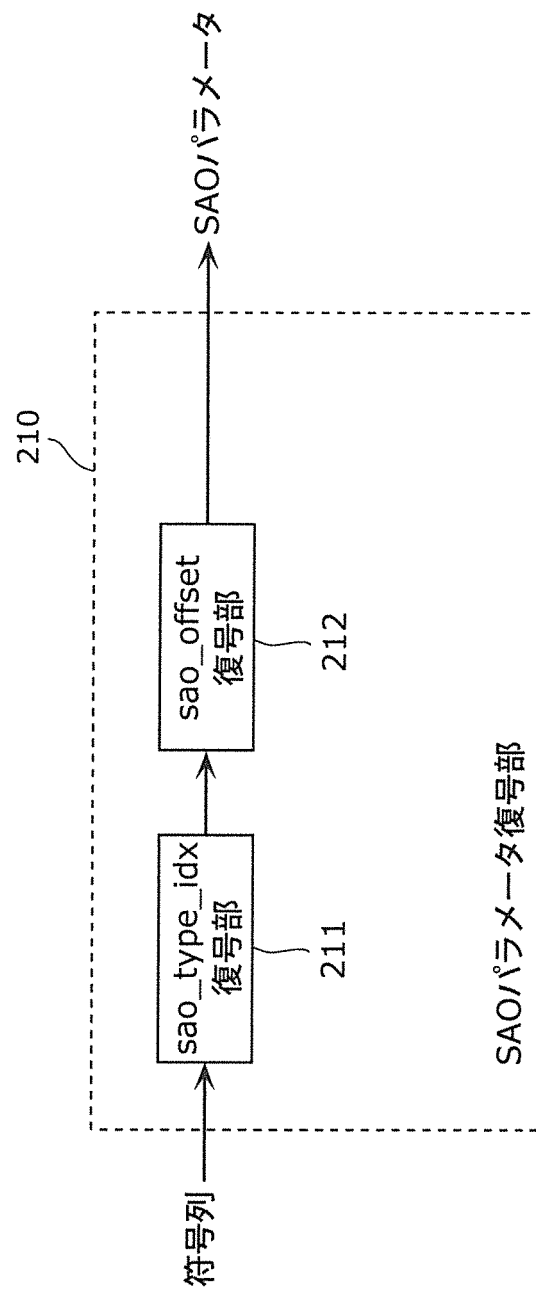


[図12]

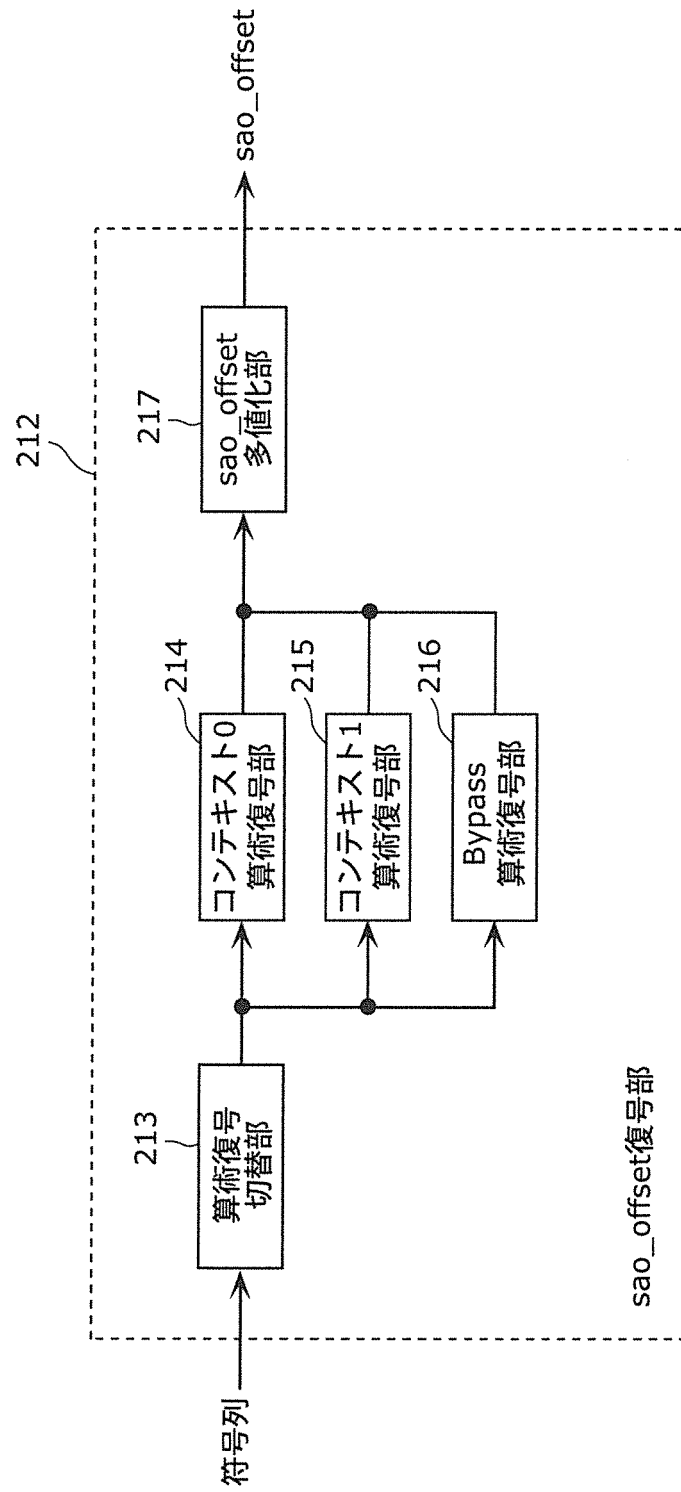


[図13]

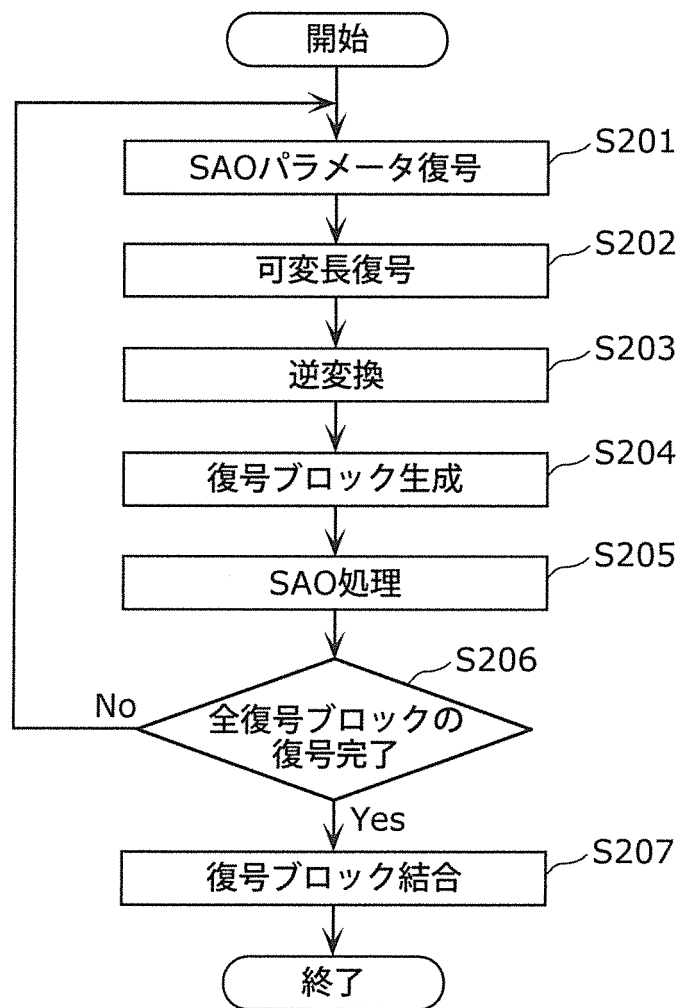


[図14]

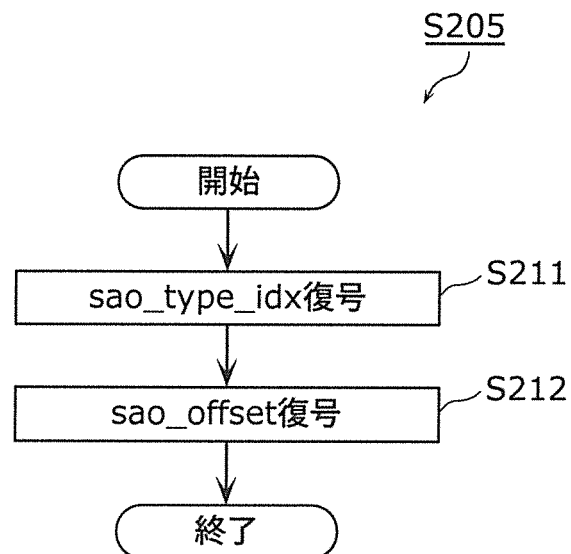


[図15A]

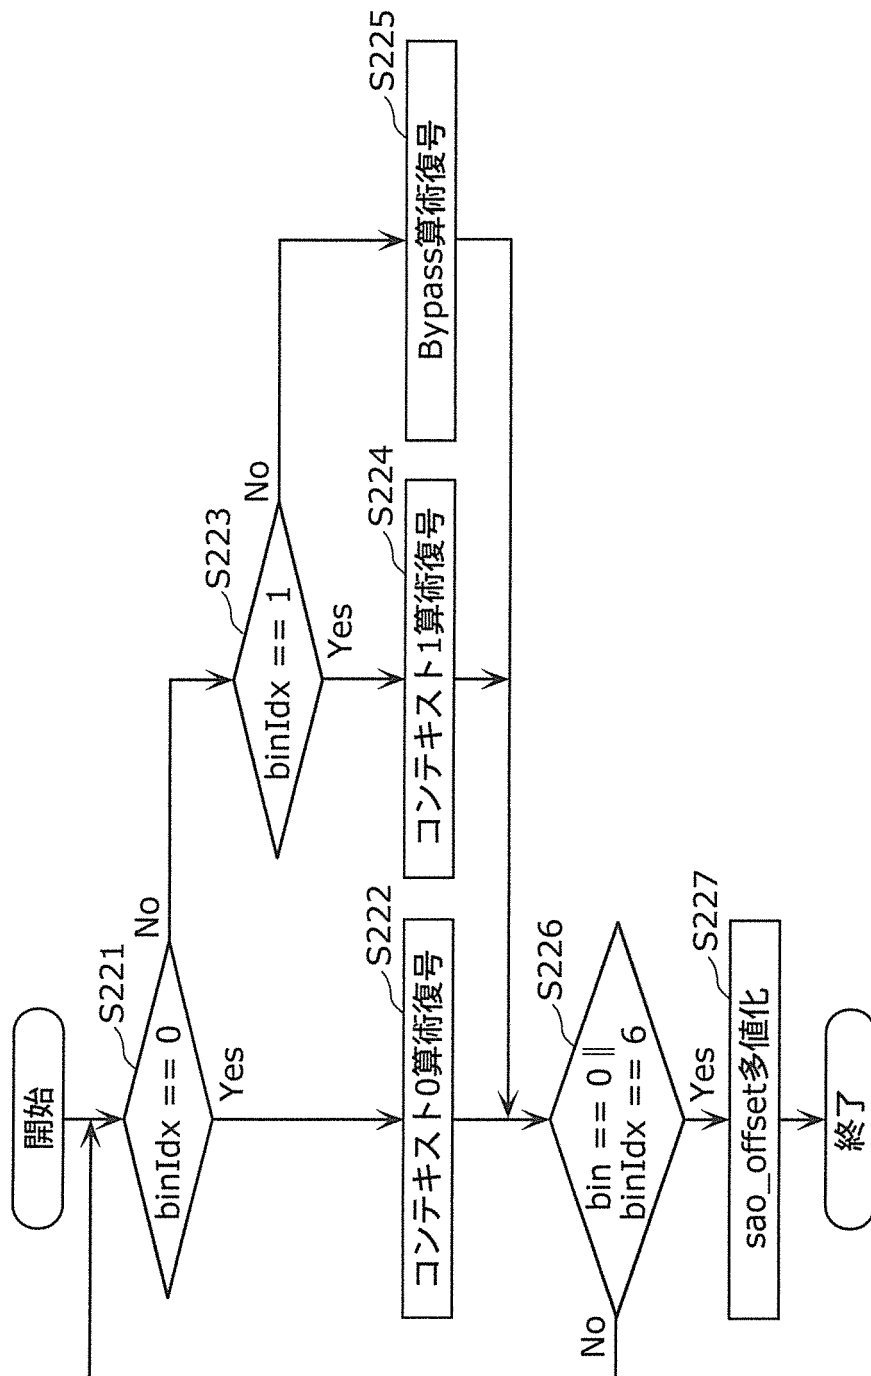


[図15B]

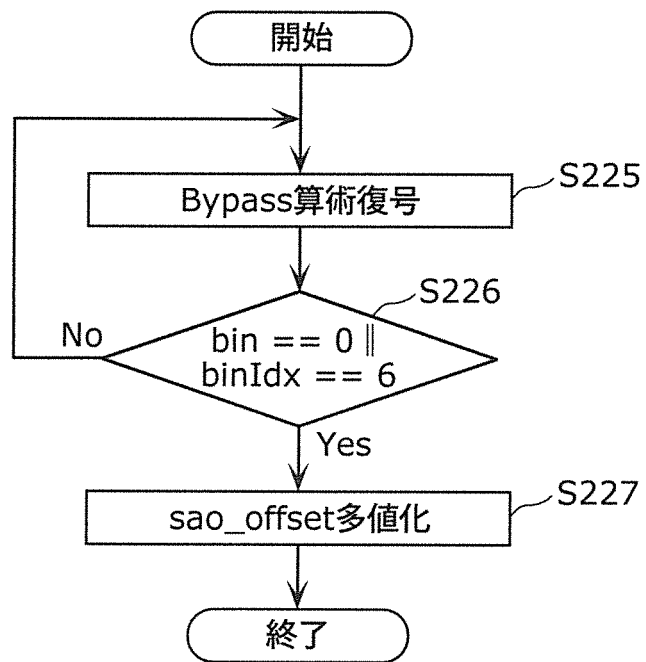


[図16]

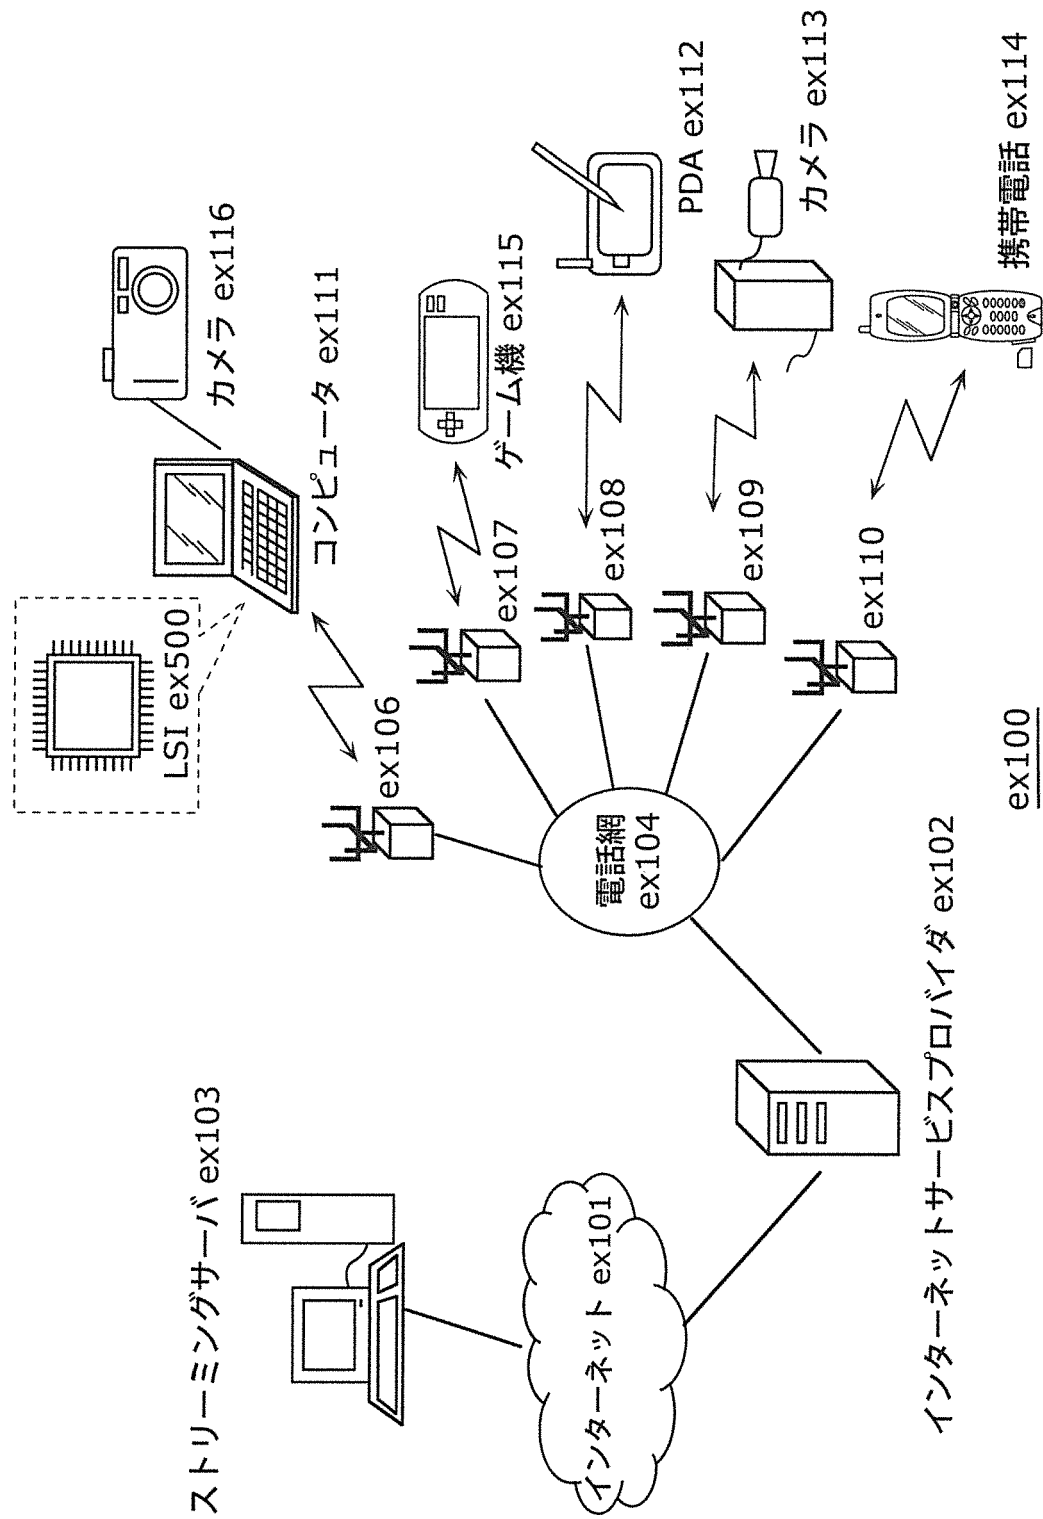


[図17]

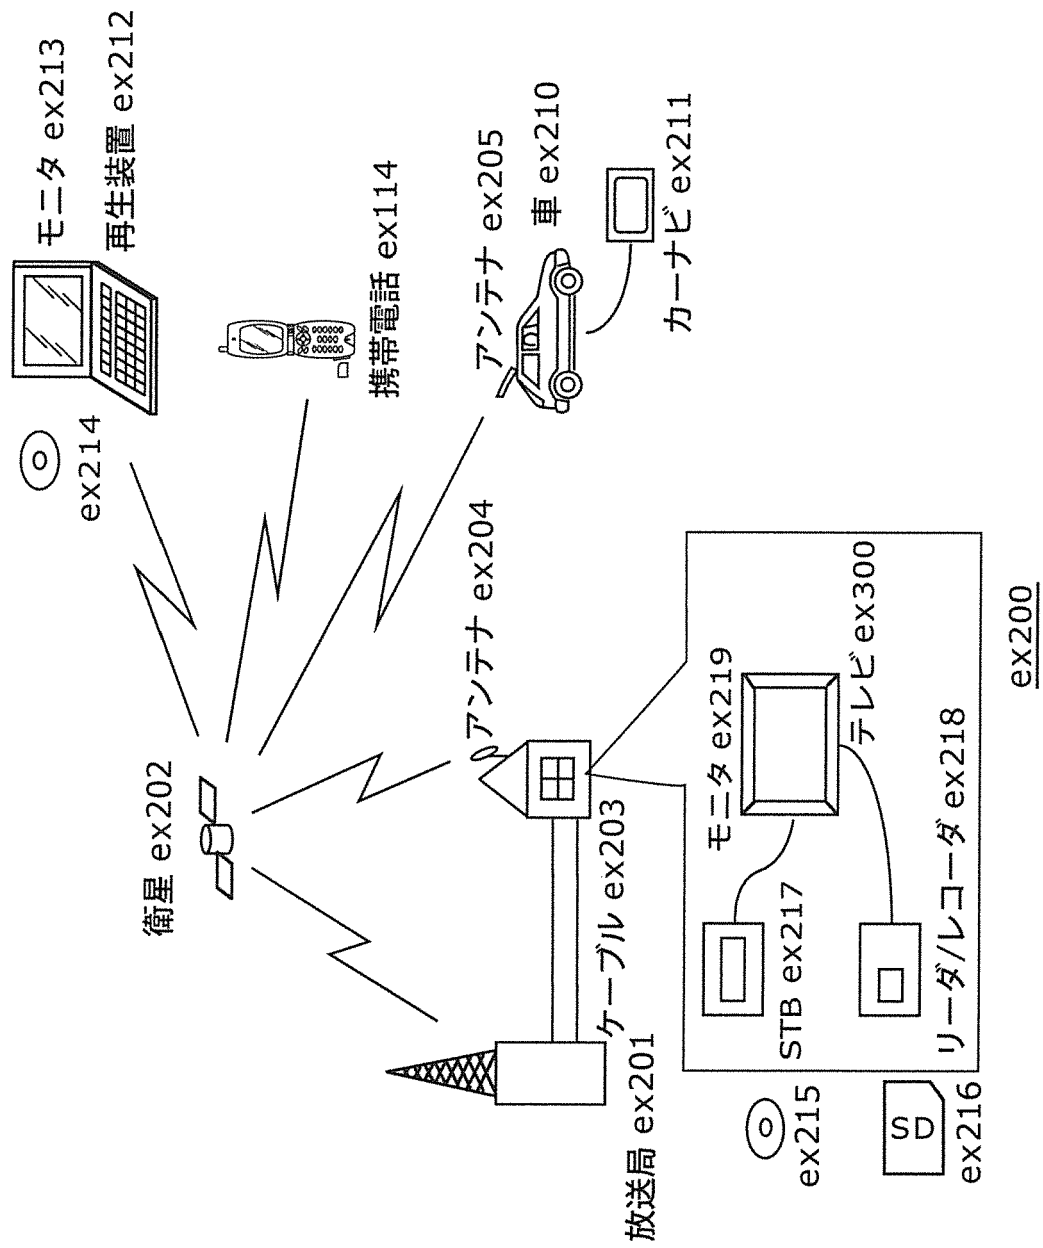


[図18]

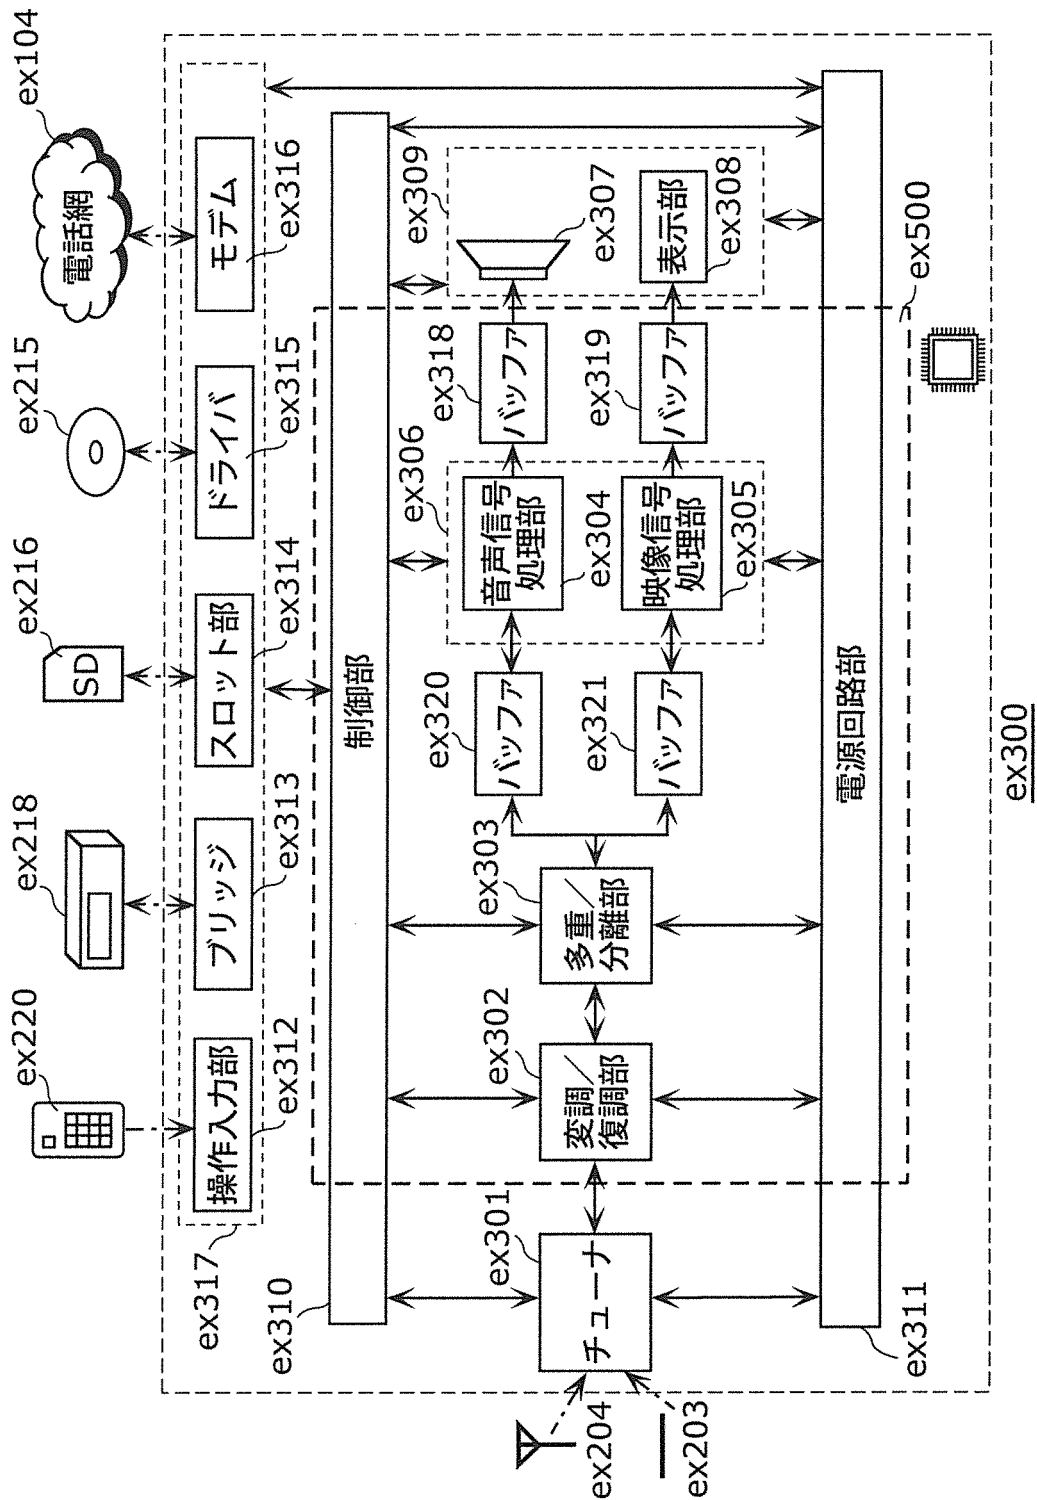


[図19]

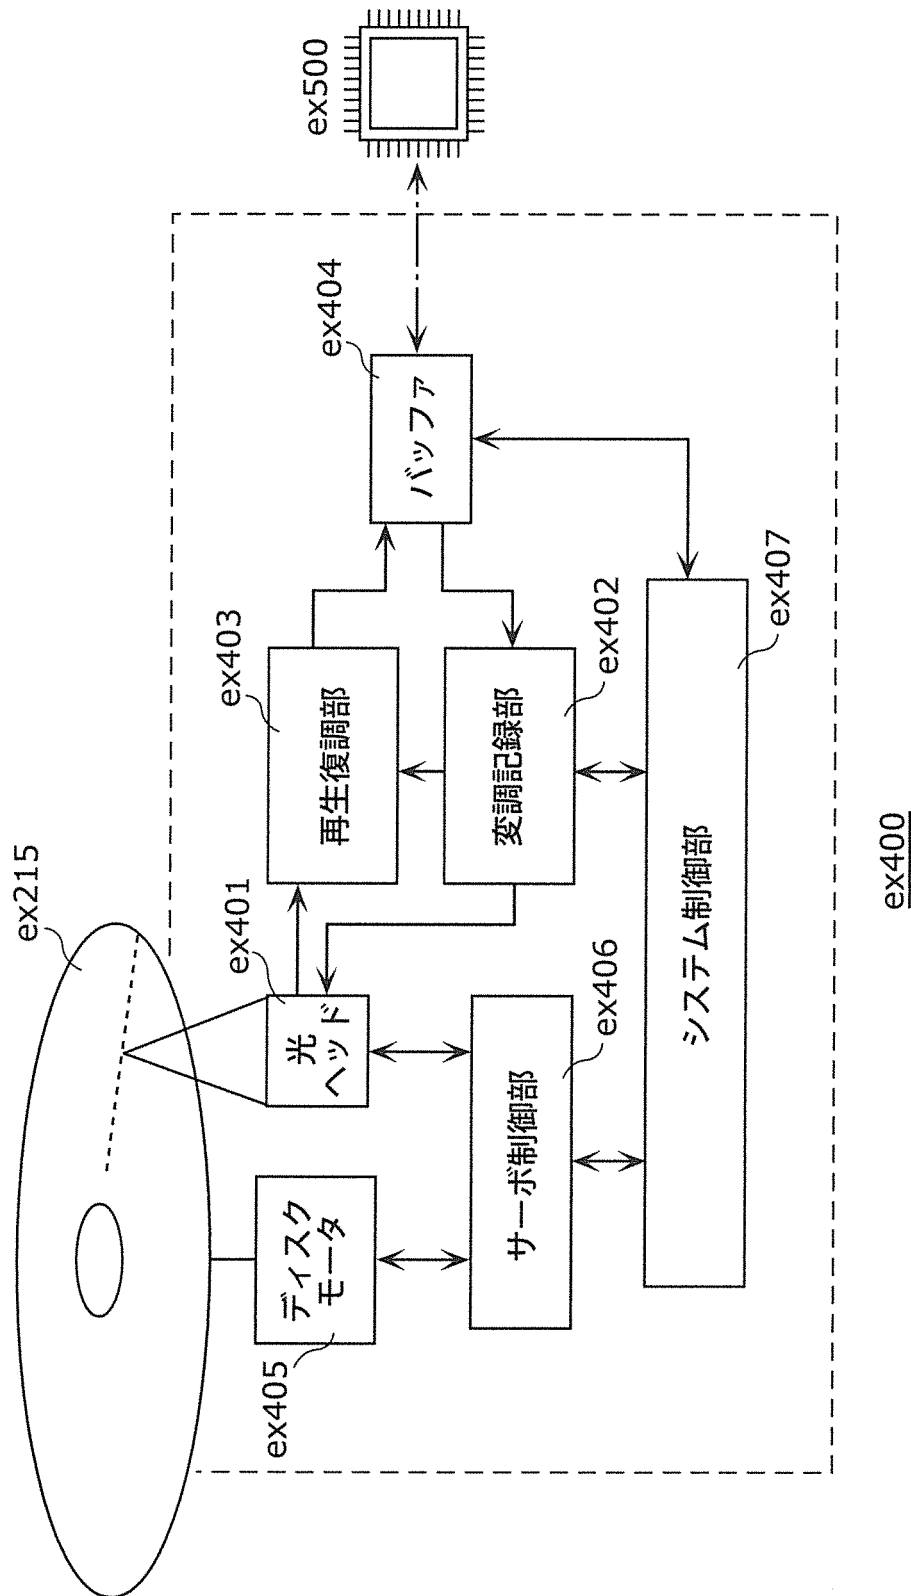


[図20]

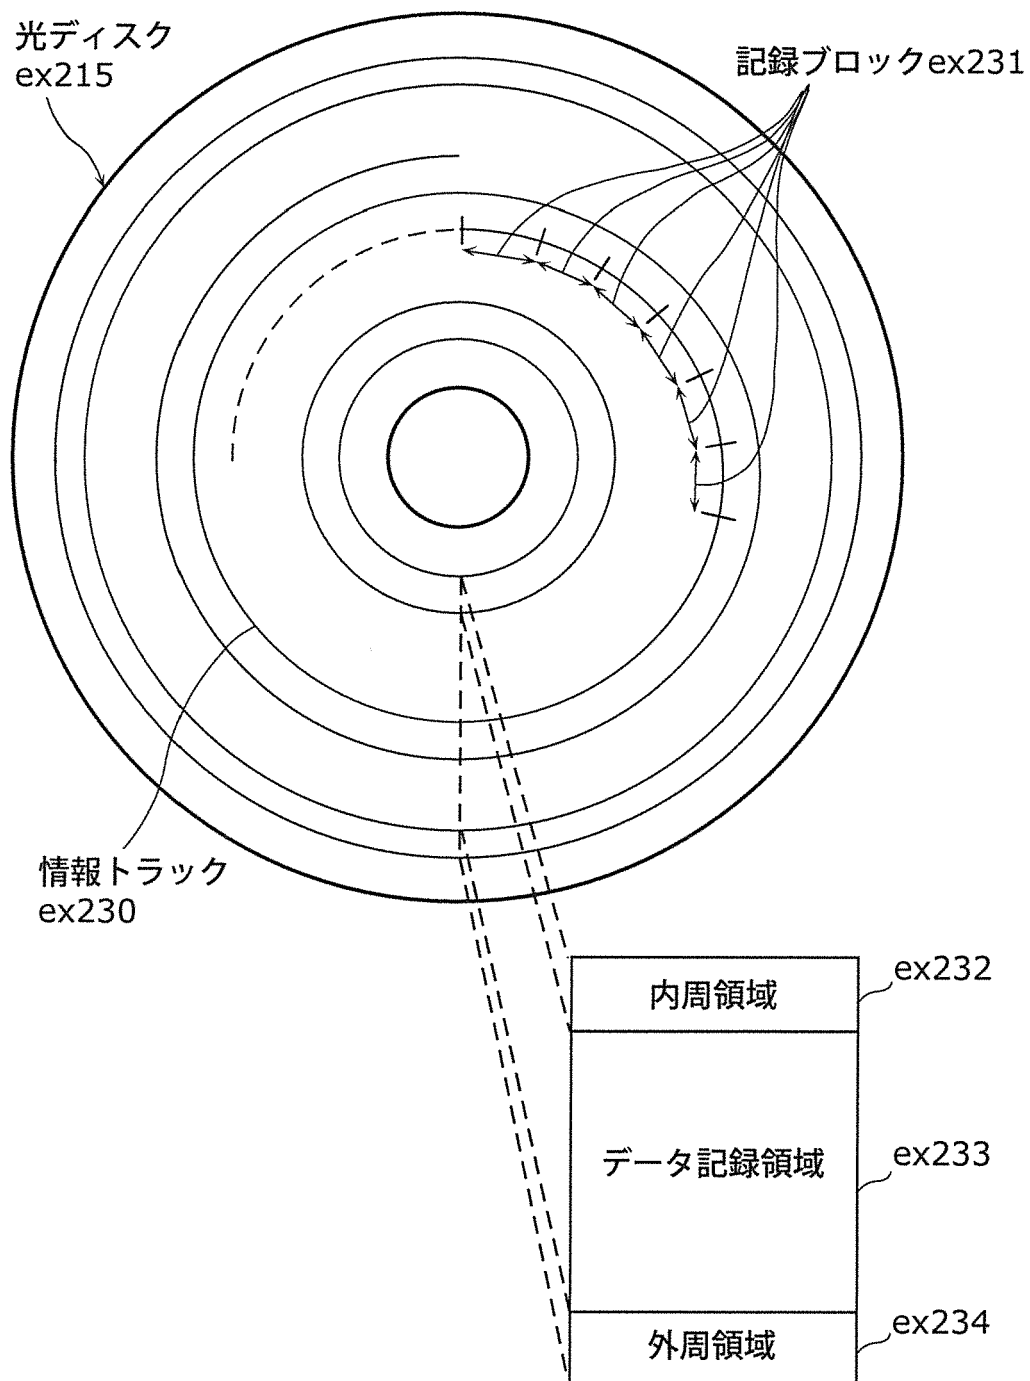

[図21A]

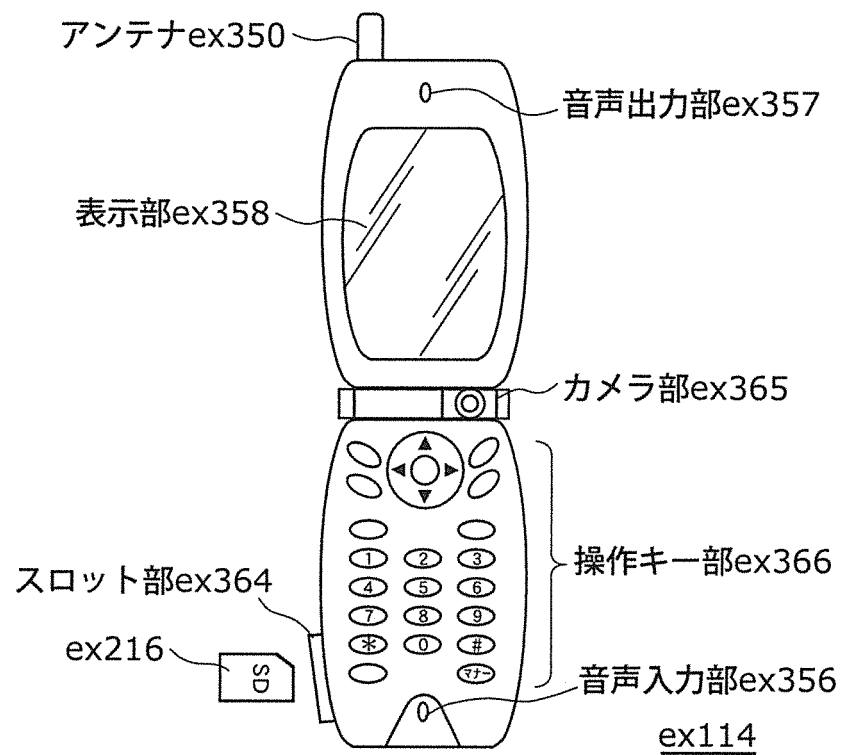


[図21B]

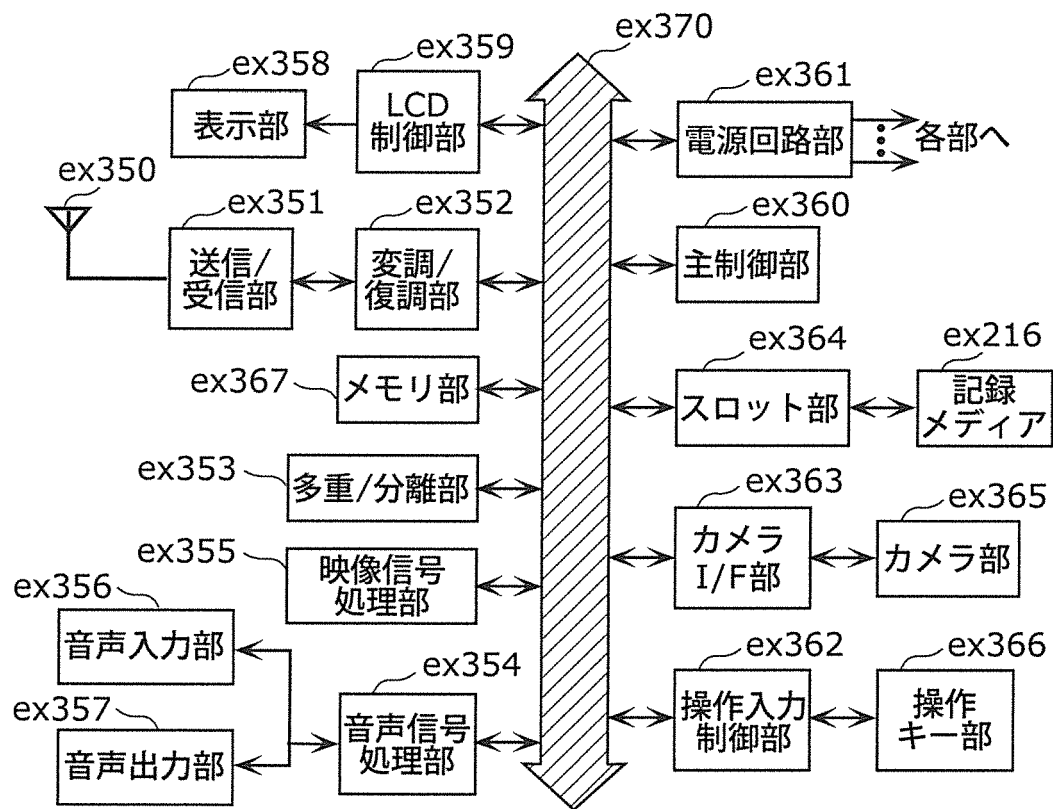


[図22]

ビデオストリーム(PID=0x1011 主映像)
オーディオストリーム(PID=0x1100)
オーディオストリーム(PID=0x1101)
プレゼンテーショングラフィックスストリーム(PID=0x1200)
プレゼンテーショングラフィックスストリーム(PID=0x1201)
インタラクティブグラフィックスストリーム(PID=0x1400)
ビデオストリーム(PID=0x1B00 副映像)
ビデオストリーム(PID=0x1B01 副映像)


[図23]

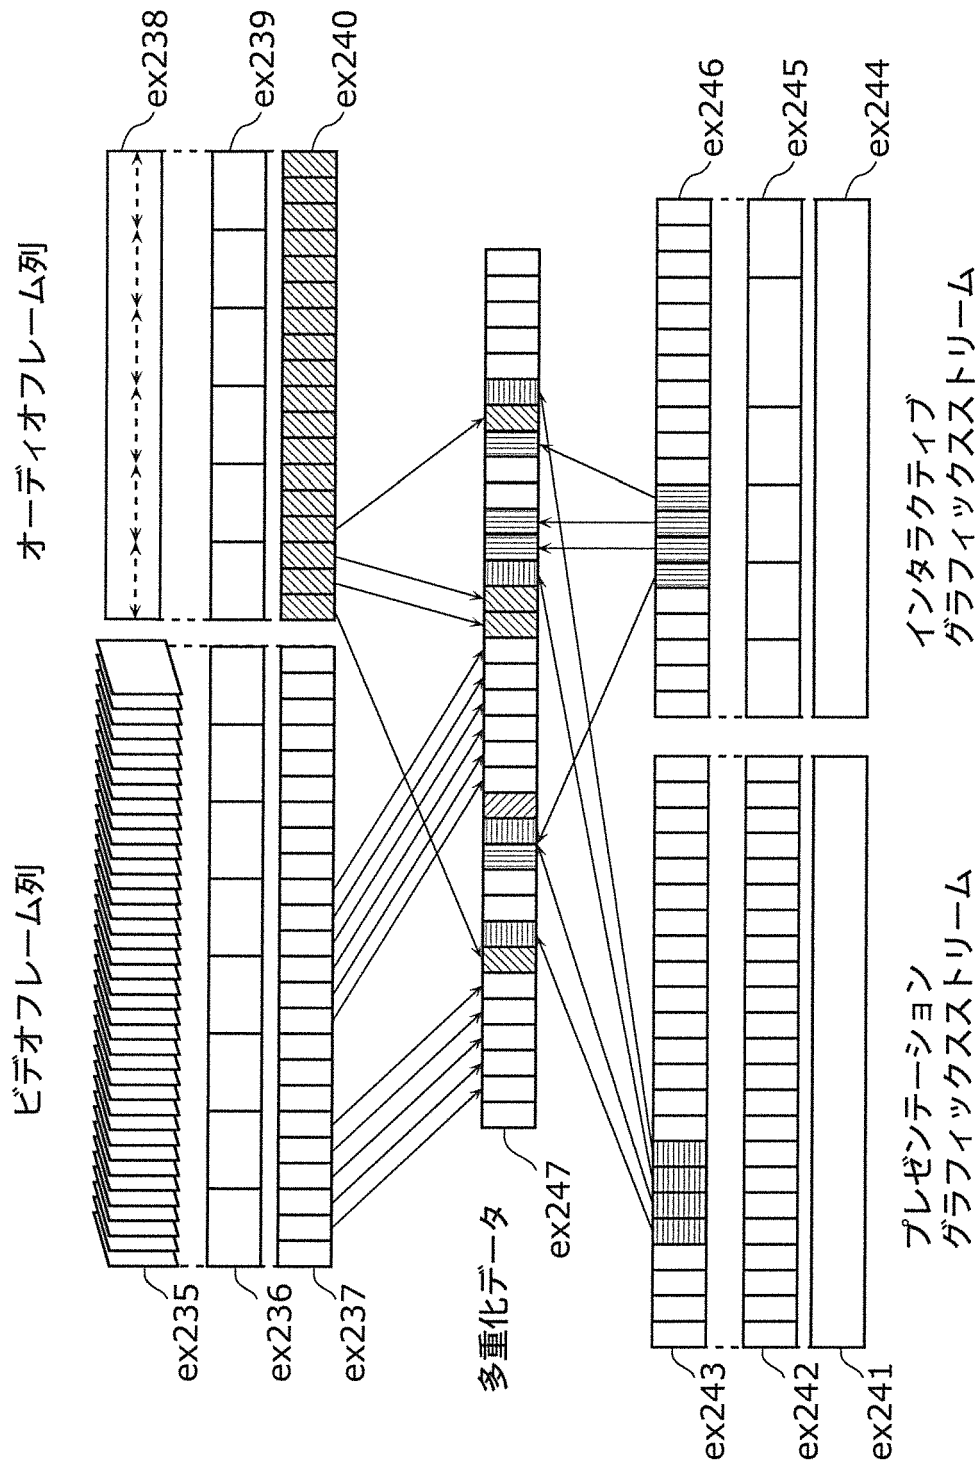

[図24]

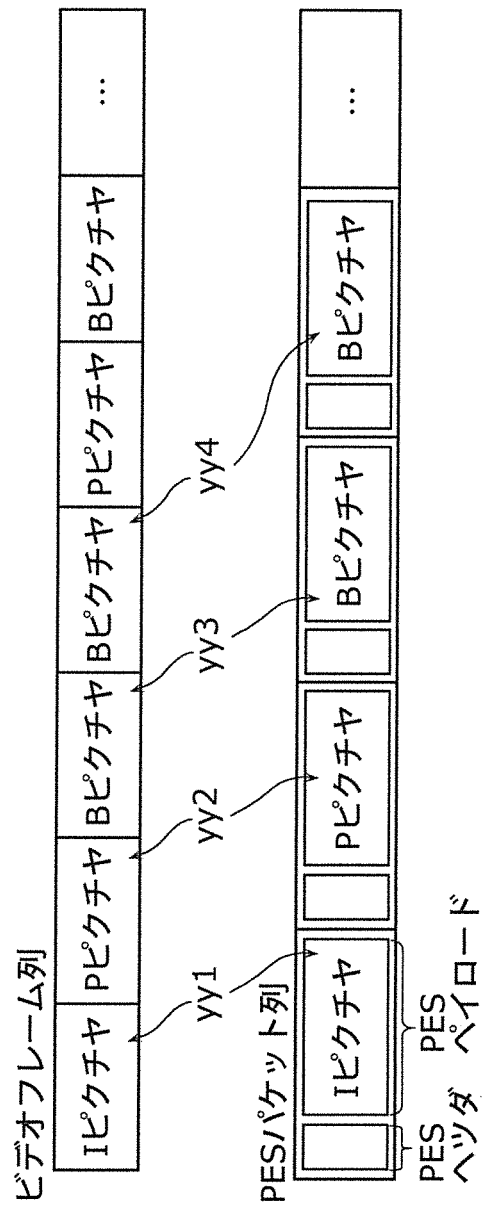


[図25]

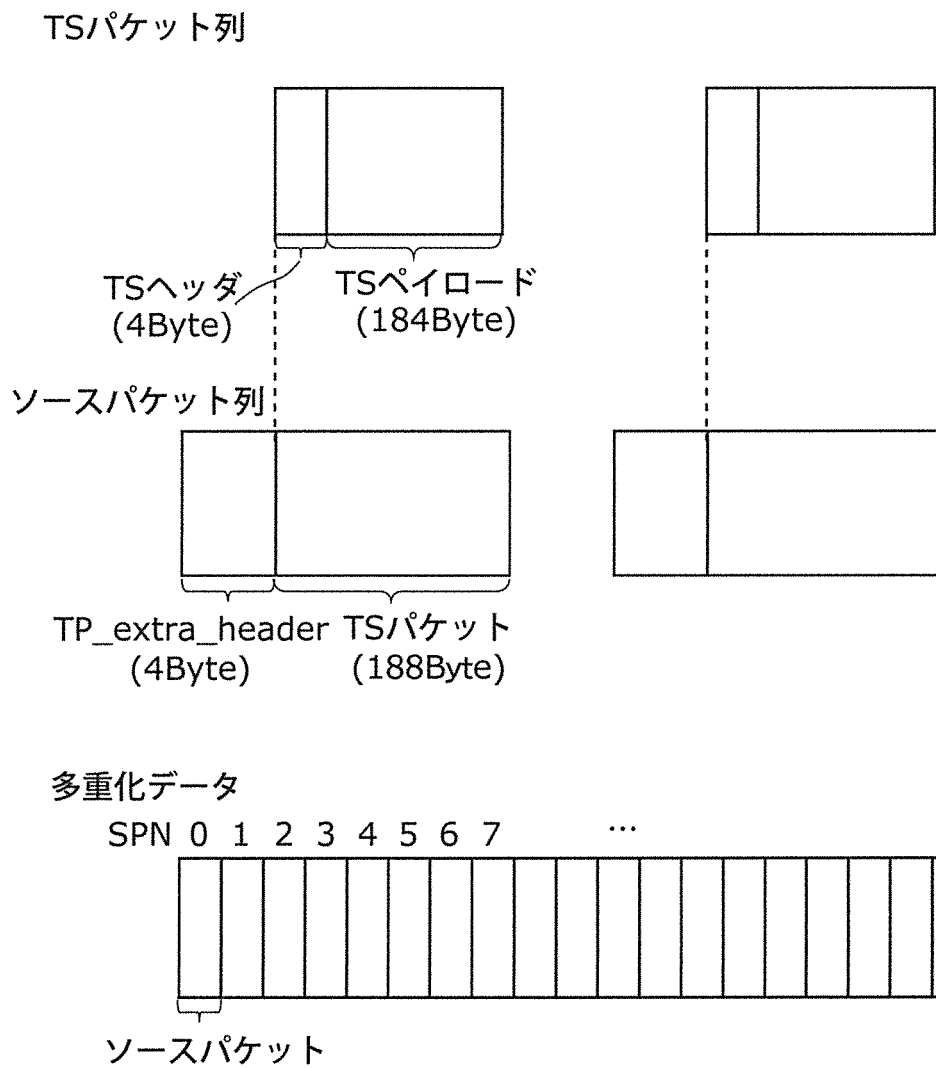


[図26]


PMTのデータ構造

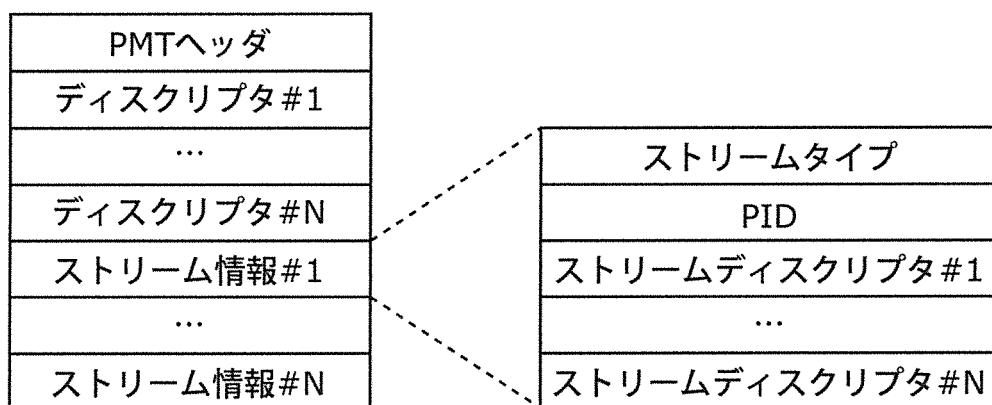


[図27]

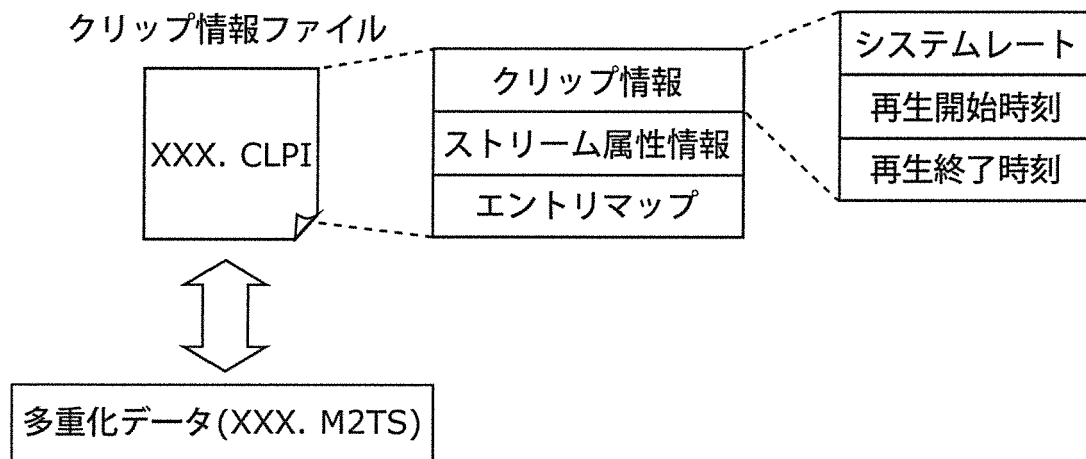


[図28]

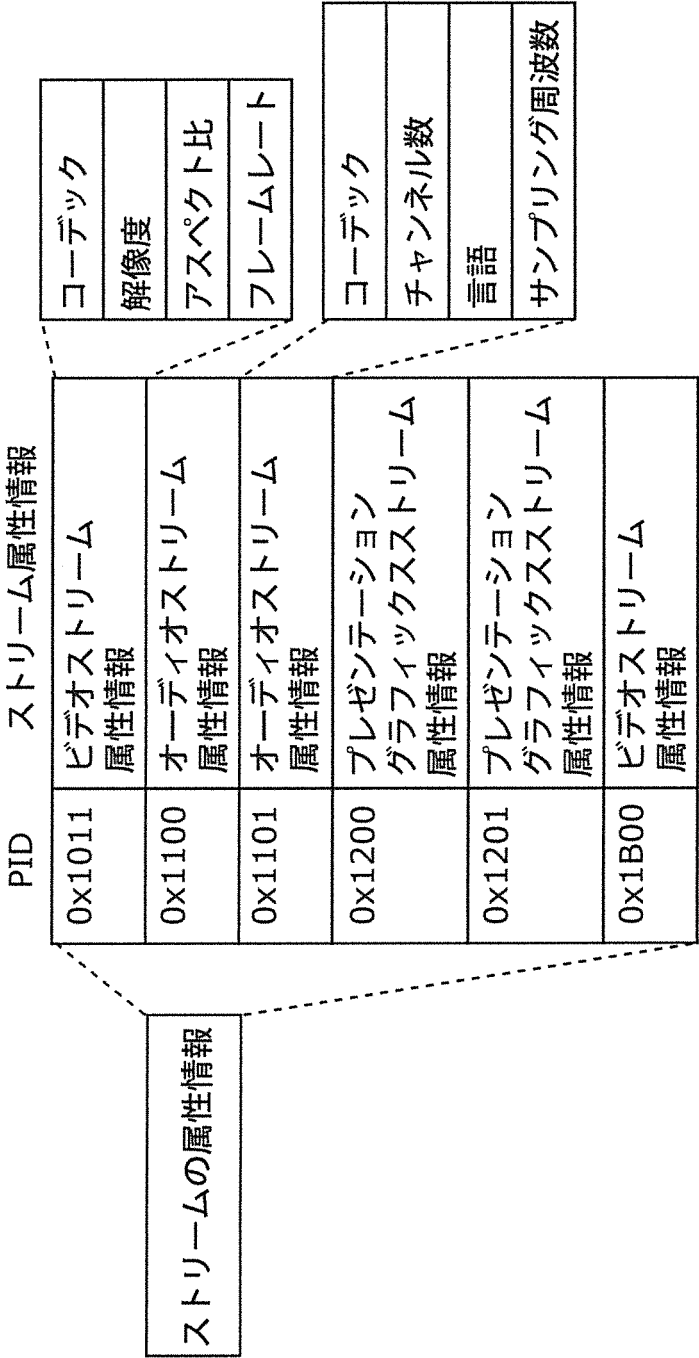


[図29]

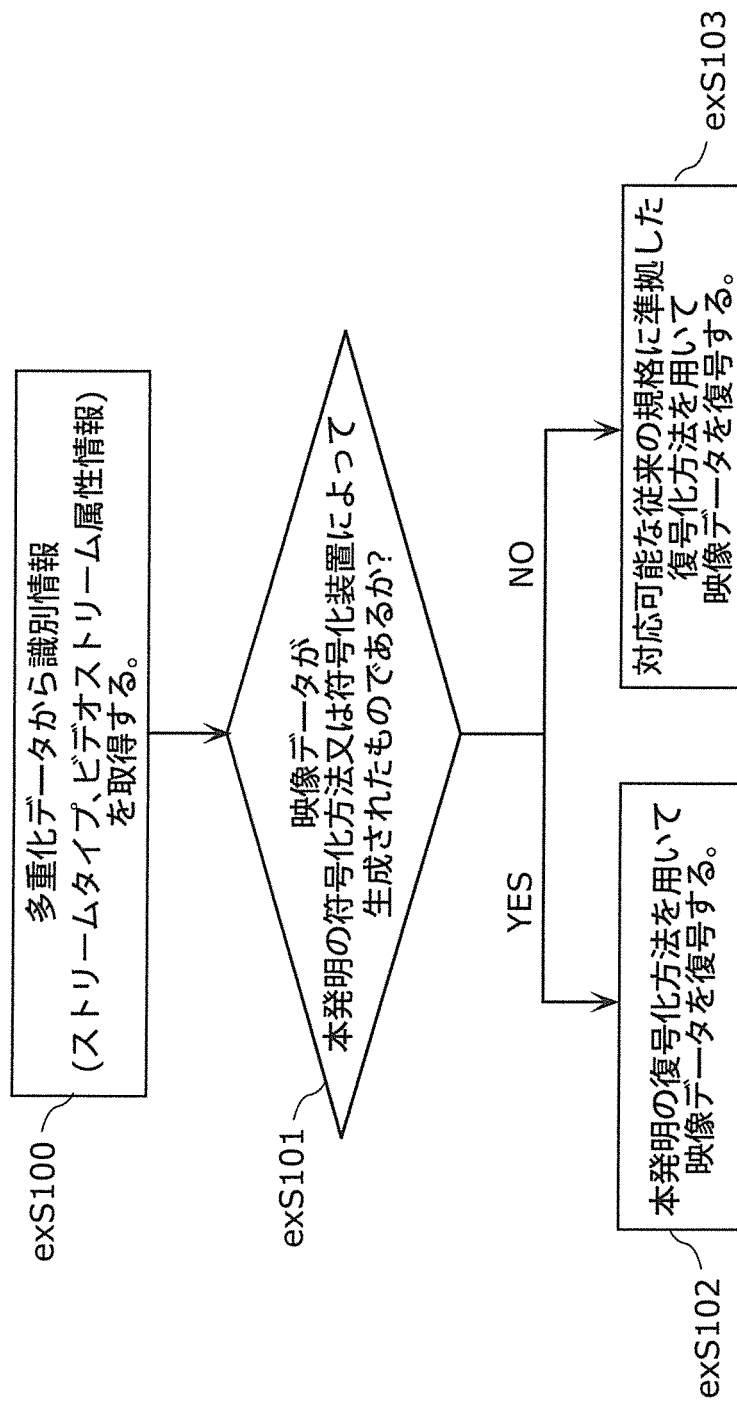


[図30]

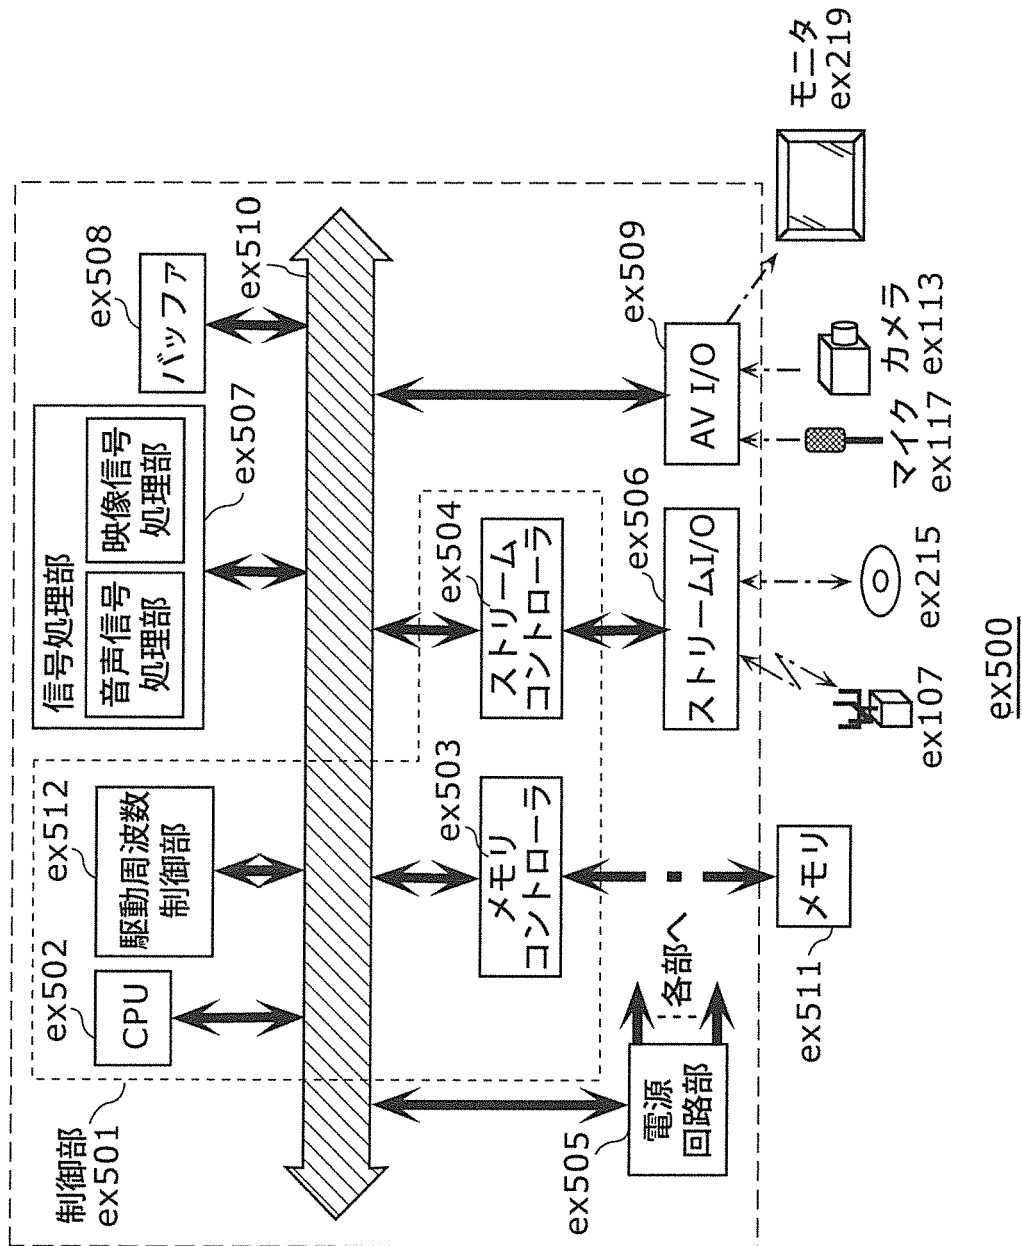

[図31]

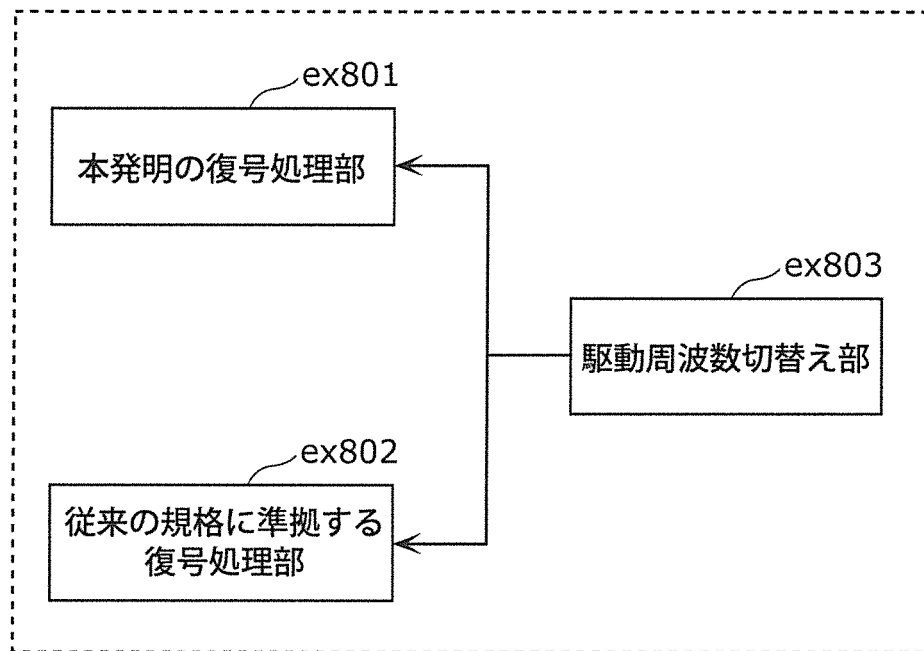


[図32]

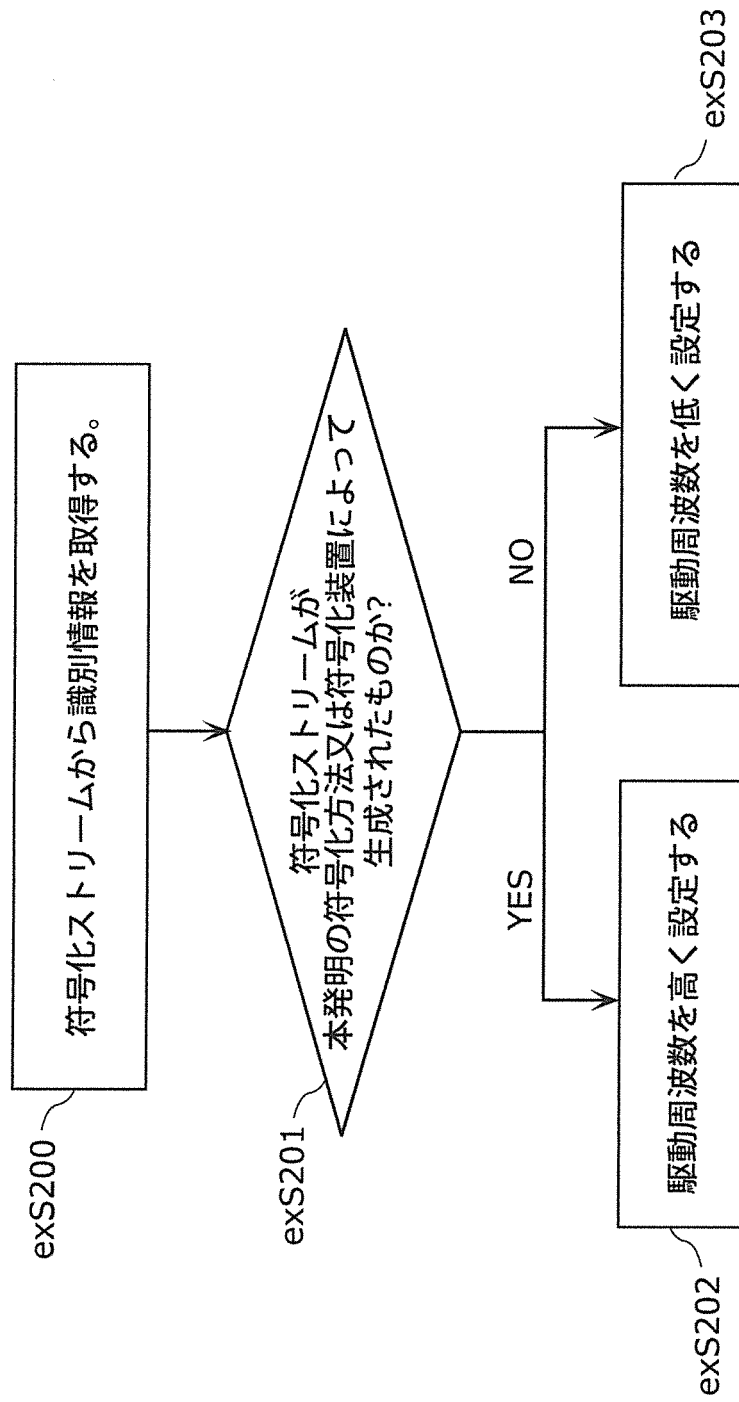

[図33]

対応規格	駆動周波数
MPEG4.AVC	500MHz
MPEG2	350MHz
⋮	⋮

[図34A]

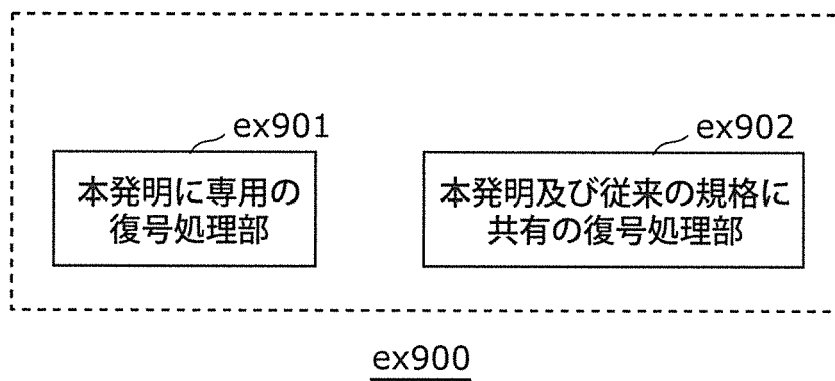

[図34B]

