(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 April 2011 (28.04.2011)

PCT

(10) International Publication Number
WO 2011/048909 A2

(51) International Patent Classification:
H04N 7/30 (2006.01)

(21) International Application Number:
PCT/JP2010/066621

(22) International Filing Date:
16 September 2010 (16.09.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/603,100 21 October 2009 (21.10.2009) US

(71) Applicant *(for all designated States except JP, KP, US)*: **MITSUBISHI ELECTRIC CORPORATION** [JP/JP]; 7-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo, 1008310 (JP).

(71) Applicant *(for JP only)*: **MITSUBISHI ELECTRIC RESEARCH LABORATORIES, INC.** [US/US]; 201 Broadway, Cambridge, Massachusetts, 02139 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **COHEN, Robert, A.** [—/US]; 8 Carver St., Apt. 1, Somerville, Massachusetts, 02143 (US). **VETRO, Anthony** [—/US]; 133 Warren Street, Unit 2, Arlington, Massachusetts, 02474 (US). **SUN, Huifang** [—/US]; 2 Skyline Dr., Billerica, Massachusetts, 01821 (US).

(74) Agents: **SOGA, Michiharu** et al.; S. Soga & Co., 8th Floor, Kokusai Building, 1-1, Marunouchi 3-chome, Chiyoda-ku, Tokyo, 1000005 (JP).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) **Title**: METHOD FOR DECODING A BITSTREAM

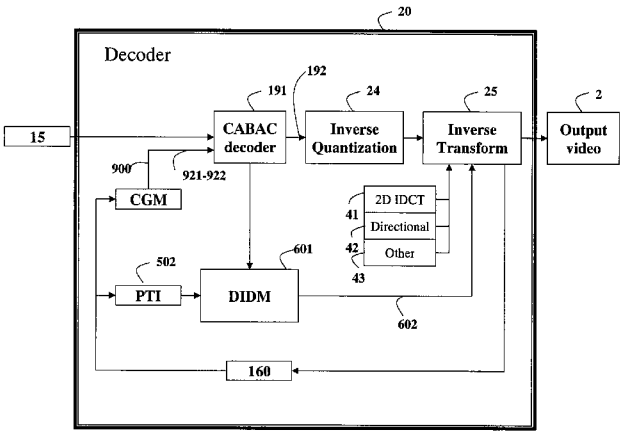


Fig. 1B

(57) **Abstract**: A bitstream includes a sequence of frames. Each frame is partitioned into encoded blocks. For each block, a set of paths is determined at a transform angle determined from a transform index in the bitstream. Transform coefficients are obtained from bitstream. The transform coefficients include one DC coefficient for each path. An inverse transform is applied to the transform coefficients to produce a decoded video.

WO 2011/048909 A2