(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
23 December 2009 (23.12.2009)

PCT

(10) International Publication Number
WO 2009/153545 A1

(51) International Patent Classification:
A61M 5/178 (2006.01) *A61M 5/20* (2006.01)

(21) International Application Number:
PCT/GB2009/001453

(22) International Filing Date:
10 June 2009 (10.06.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0811345.8 19 June 2008 (19.06.2008) GB

(71) Applicant *(for all designated States except US)*: **CILAG GMBH INTERNATIONAL** [CH/CH]; Landis + Gyr-Strasse 1, CH-6300 Zug (CH).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **JENNINGS, Douglas, Ivan** [GB/GB]; PA Consulting Group, Cambridge Technology Centre, Melbourn, Hertfordshire SG8 6DP (GB). **BURNELL, Rosemary, Louise** [GB/GB]; PA Consulting Group, Cambridge Technology Centre, Melbourn, Hertfordshire SG8 6DP (GB).

(74) Agents: **BRUNNER, John, Michael, Owen** et al.; Carpmaels & Ransford, 43-45 Bloomsbury Square, London WC1A 2RA (GB).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report (Art. 21(3))*

WO 2009/153545 A1

(54) Title: RE-USEABLE AUTO-INJECTOR WITH FILLING MEANS

FIG. 4

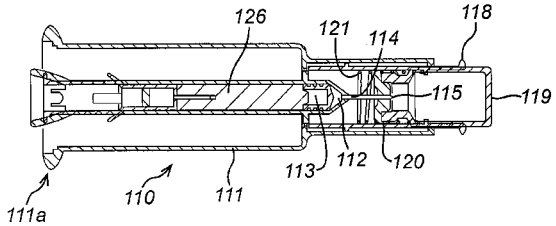

(57) Abstract: An injection device having a first sub-assembly (110) comprises a housing (111) and a chamber (112). The chamber is disposed within the housing and has proximal and distal ends, an inner surface and an exit aperture (114). The sub-assembly comprises a stopper (113) movably disposed within the chamber. The stopper has an outer surface substantially in contact with the inner surface about its perimeter. The sub-assembly comprises a port (118) adapted to receive a container (1199) containing a fluid. The stopper is fixed with respect to the housing and movement of the port causes movement of the exit aperture in relation to the stopper.