(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
26 April 2001 (26.04.2001)

PCT

(10) International Publication Number
WO 01/30038 A1

(51) International Patent Classification[7]: H04L 25/02

(21) International Application Number: PCT/US00/41103

(22) International Filing Date: 10 October 2000 (10.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/159,725 15 October 1999 (15.10.1999) US
09/569,657 12 May 2000 (12.05.2000) US

(71) Applicant: MICRO MOTION, INC. [US/US]; 7070 Winchester Circle, Boulder, CO 80301 (US).

(72) Inventors: HAYS, Paul, J.; 4091 Longhorn Drive, Lafayette, CO 80026 (US). MANSFIELD, William, M.; 3975 Dale Drive, Lafayette, CO 80026 (US).

(74) Agents: WILBAR, William, P. et al.; Duft, Graziano & Forest, P.C., P.O. Box 270930, Louisville, CO 80027-5015 (US).

(81) Designated States *(national)*: AU, BR, CA, CN, ID, IN, JP, KR, MX, PL, RU, SG.


(84) Designated States *(regional)*: European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published:
— *With international search report.*
— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM FOR SETTING TRANSMISSION PROTOCOL BASED ON DETECTED BAUD RATE

(57) Abstract: A system for setting baud rate and communication protocol in a remote device. In this invention, the remote device (301) receives samples of signals from a host device in a buffer. The remote device then (303) detects a baud rate of the signals from the samples. A protocol being used by the host device to communicate is also (304) determined from the samples. The remote device is then (305) set to communicate using the determined protocol at the detected baud rate.

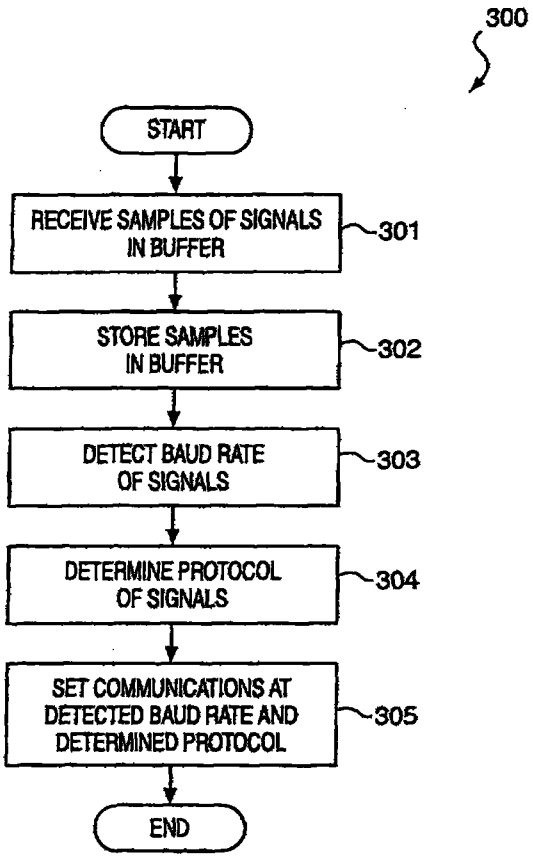

WO 01/30038 A1