

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 April 2009 (09.04.2009)

PCT

(10) International Publication Number
WO 2009/046276 A1

(51) International Patent Classification:

G01R 31/319 (2006.01)

(21) International Application Number:

PCT/US2008/078715

(22) International Filing Date: 3 October 2008 (03.10.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/867,672 4 October 2007 (04.10.2007) US

(71) Applicant (for all designated States except US): **TERADYNE, INC.** [US/US]; 700 Riverpark Drive, North Reading, Massachusetts 01864 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GOHEL, Tushar K.** [US/US]; 894 Main Street, Unit 14, Wakefield, Massachusetts 01880 (US). **FRICK, Lloyd K.** [US/US]; PO Box 111, Pepperell, Massachusetts 01463 (US).


(74) Agent: **PYSHER, Paul A.**; Fish & Richardson P.C., PO Box 1022, Minneapolis, MN 55440-1022 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: EMULATING BEHAVIOR OF A LEGACY TEST SYSTEM

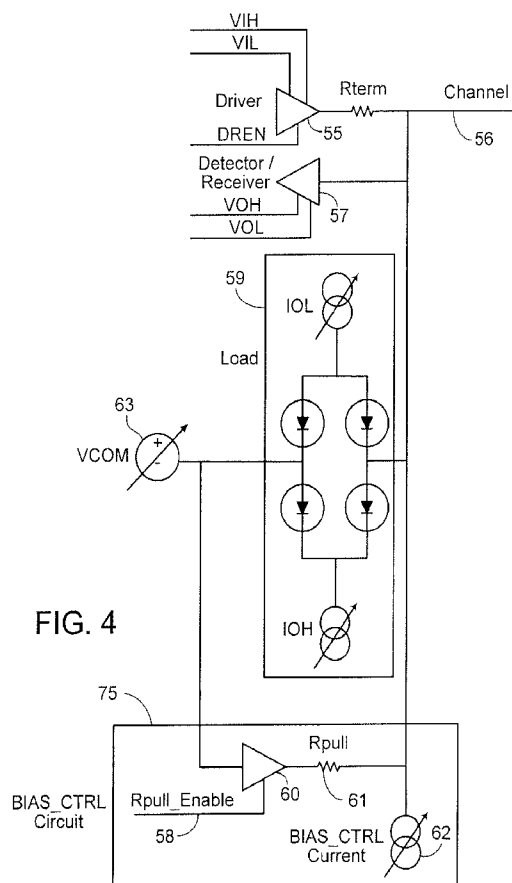

(57) Abstract: An apparatus for use in testing a device includes a communication channel (56) having a set of programmable parameters associated therewith. The programmable parameters result in a bias condition on the communication channel. A bias control circuit (75) is used to affect the bias condition that results from the programmable parameters in order to emulate a desired bias condition.



Published:

— *with international search report*