




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A47B 21/03		A1	(11) International Publication Number: WO 99/44470
			(43) International Publication Date: 10 September 1999 (10.09.99)
(21) International Application Number: PCT/NL99/00117		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 4 March 1999 (04.03.99)			
(30) Priority Data: 1008509 ✓ 6 March 1998 (06.03.98) NL 1008508 ✓ 6 March 1998 (06.03.98) NL 1009973 X 31 August 1998 (31.08.98) NL			
(71) Applicant (for all designated States except US): ONESTOP B.V. [NL/NL]; Jadelaan 65, NL-2132 XX Hoofddorp (NL).			
(72) Inventor; and		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Dutch).	
(75) Inventor/Applicant (for US only): DE BEER, Johannes, Henricus, Petrus [NL/NL]; Stadionweg 122-4, NL-1077 SV Amsterdam (NL).			
(74) Agent: WITTOP KONING, T., H.; Exter Polak & Charlois B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).			

(54) Title: WRIST PAD

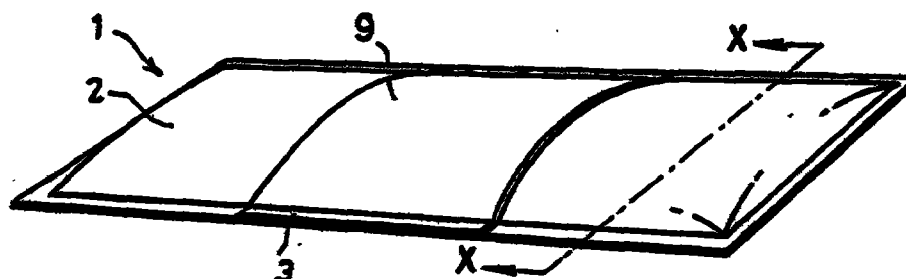

(57) Abstract

The invention describes a support (1) for supporting an arm or a wrist during use of a keyboard or computer mouse, which support comprises a top covering layer (2), a substantially gel-free resilient material, one or more reinforcement layers, and a bottom layer, the bottom layer and the covering layer being connected to each other so that they enclose the resilient layer and the reinforcement layer(s). A mouse mat can be fixed to the support. A method for manufacturing such a support is also described.