



(51) International Patent Classification:

A63F 13/65 (2014.01) A63F 13/50 (2014.01)
A63F 13/40 (2014.01) G06F 9/455 (2006.01)

(21) International Application Number:

PCT/SG2016/050427

(22) International Filing Date:

01 September 2016 (01.09.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **RAZER (ASIA-PACIFIC) PTE. LTD.**
[SG/SG]; 514 Chai Chee Lane, #07-05, Singapore 469029 (SG).

(72) Inventors: **WELLS, Stuart**; 1073 14th St, San Francisco, California 94114 (US). **CASANO, Anthony P.**; 1370 El Solyo Heights Drive, Felton, California 95018 (US).


(74) Agent: **VIERING, JENTSCHURA & PARTNER LLP**;
P.O. Box 1088, Rochor Post Office, Rochor Road, Singapore 911833 (SG).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: METHODS FOR EMULATING A VIRTUAL CONTROLLER DEVICE, EMULATORS, AND COMPUTER-READ-ABLE MEDIA

FIG 2A

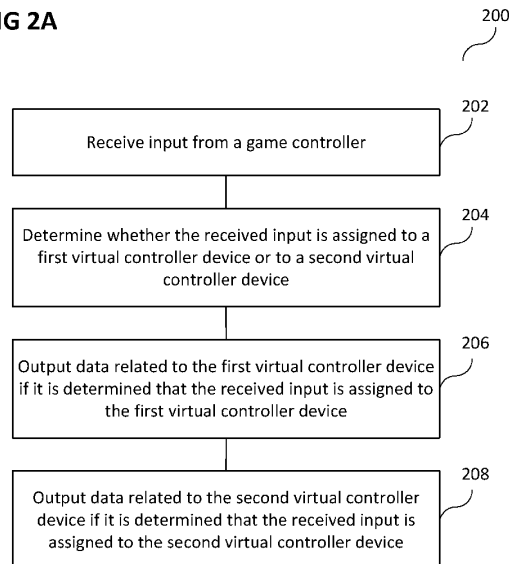

(57) Abstract: According to various embodiments, a method for emulating a virtual controller device may be provided. The method may include: receiving input from a game controller; determining whether the received input is assigned to a first virtual controller device or to a second virtual controller device; outputting data related to the first virtual controller device if it is determined that the received input is assigned to the first virtual controller device; and outputting data related to the second virtual controller device if it is determined that the received input is assigned to the second virtual controller device.

[Continued on next page]

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*