



(51) International Patent Classification:
B64F 1/22 (2006.01)

(21) International Application Number:
PCT/IL2009/001110

(22) International Filing Date:
25 November 2009 (25.11.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
195505 25 November 2008 (25.11.2008) IL
198950 25 May 2009 (25.05.2009) IL

(71) Applicant (for all designated States except US): **ISRAEL AEROSPACE INDUSTRIES LTD.** [IL/IL]; Ben Gurion International Airport, 70100 Lod (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PERRY, Arie** [IL/IL]; 3 Shabtai Street, 45257 Hod Hasharon (IL).
BRAIER, Ran [IL/IL]; 8c Emek Haaylon Blvd., P.O. Box 2264, Shoham 73142 (IL).

(74) Agent: **REINHOLD COHN & PARTNERS**; P.O.B 13239, 61131 Tel Aviv (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: TOWBARLESS AIRPLANE TUG

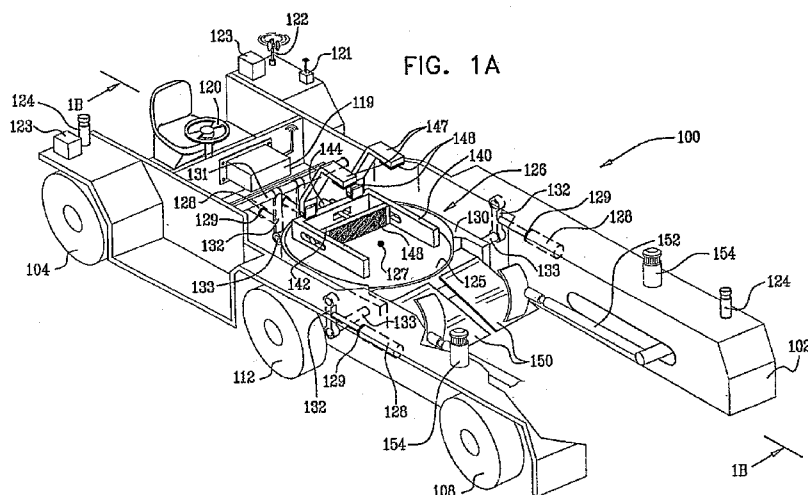

(57) Abstract: A towbarless airplane tug configured for receiving a landing gear of an airplane and towing it thereby is provided. The tug comprises a chassis configured for receiving thereon at least a portion of the landing gear, a propulsion arrangement configured to move the tug in a direction along a trajectory, at least one force sensor configured to measure, directly or indirectly, a force exerted by the chassis on the landing gear in at least the direction due to a speed differential between the tug and the airplane, and a controller in communication with the force sensor and being configured to alter one or more parameters of movement of the tug such that the force exerted by the chassis on the landing gear is maintained below a predetermined value. The propulsion arrangement comprises a variable angle swash plate hydraulic pump coupled to a variable angle swash plate hydraulic motor and to a controllable bypass path valve, configured such that a hydraulic fluid circulates between the pump and the motor so as to activate the propulsion arrangement to increase at least one of the speed and the traction force of the tug when the bypass path is in a closed state, and at least most of the hydraulic fluid circulates across the motor via the bypass path valve so as to reduce at least one of a rotational speed and traction force of the tug when the bypass path is in an opened state. The controller alters the parameters by regulating at least the power available to the propulsion arrangement, the pump and motor swash-plates, and the state of the bypass path valve.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
16 December 2010