

(51) International Patent Classification:
H04B 7/26 (2006.01)(21) International Application Number:
PCT/CN2013/074143(22) International Filing Date:
12 April 2013 (12.04.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/623,418 12 April 2012 (12.04.2012) US
13/798,472 13 March 2013 (13.03.2013) US(71) Applicant: **HUAWEI TECHNOLOGIES CO., LTD.**
[CN/CN]; Huawei Administration Building, Bantian,
Longgang, Shenzhen, Guangdong 518129 (CN).(72) Inventors: **KWON, Hoonyoung**; 7273 Canyon Glen
Court, San Diego, California 92129 (US). **YANG, Yun-
song**; 705 Blaine Court, Apt.1508, Schaumburg, Illinois
60173 (US). **RONG, Zhigang**; 13565 Silver Ivy Ln., San
Diego, California 92129 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).**Declarations under Rule 4.17:**— as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii))**Published:**

— with international search report (Art. 21(3))

(54) Title: SYSTEM AND METHOD FOR DOWNLINK TRANSMISSION IN A WIRELESS NETWORK

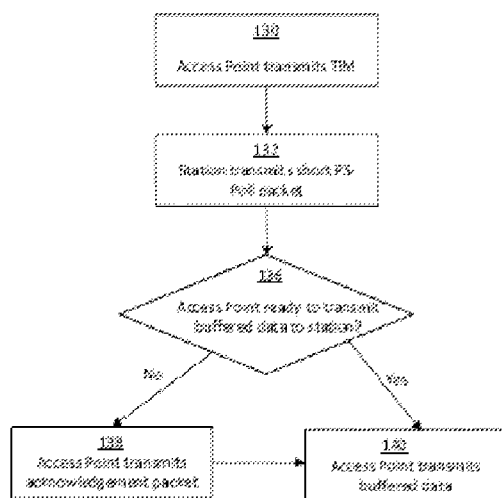


Figure 5

(57) Abstract: A method of communicating in a wireless network includes transmitting, by a station, a null data packet (NDP) power save (PS)-Poll frame including a short training field and a long training field. Also, the NDP PS-Poll frame includes a signaling field including a message type indicator, a transmitter address (TA), a receiver address (RA), and a cyclic redundancy check (CRC). Additionally, the method includes receiving, by the station, buffered data in accordance with the NDP PS-Poll frame.