



(43) International Publication Date
3 January 2014 (03.01.2014)

(51) International Patent Classification:

E02B 17/00 (2006.01) *E02B 17/08* (2006.01)
E02B 17/06 (2006.01)

(21) International Application Number:

PCT/US2013/048263

(22) International Filing Date:

27 June 2013 (27.06.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/665210 27 June 2012 (27.06.2012) US

(71) Applicant: **BARDEX CORPORATION** [US/US]; 6300 Lindmar Drive, Goleta, California 93117 (US).

(72) Inventor: **ATALLAH, Nick**; 6300 Lindmar Drive, Goleta, California 93117 (US).

(74) Agent: **JAFFE, Seth E.**; Fulbright & Jaworski LLP, 1301 McKinney, Suite 5100, Houston, Texas 77010-3095 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: LONGITUDINAL RESTRAINT

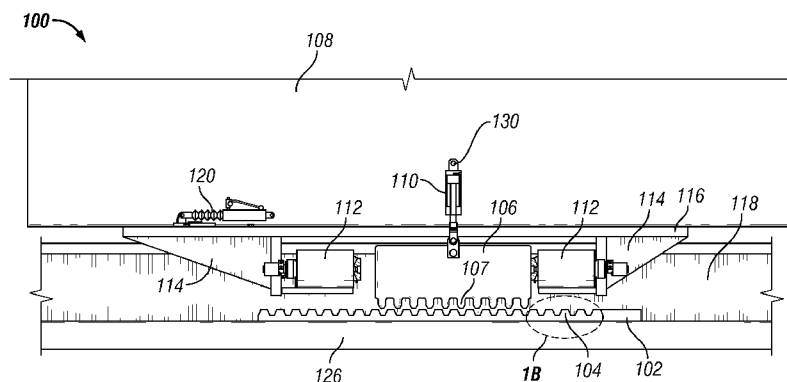


FIG. 1A

(57) Abstract: Systems and methods for longitudinally restraining a movable structure disclosed herein include, but are not limited to, providing a rack attached to a first structure and a chock attached to a second structure, wherein the rack and chock are configured to engage one another. Upon engagement, the chock may be locked into place with extendable jack screws, thereby restraining the movable structure in the longitudinal direction.

