




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E05B 1/00	A1	(11) International Publication Number: WO 99/02804
		(43) International Publication Date: 21 January 1999 (21.01.99)
(21) International Application Number: PCT/IL98/00312 (22) International Filing Date: 5 July 1998 (05.07.98) (30) Priority Data: 121287 11 July 1997 (11.07.97) IL (71)(72) Applicant and Inventor: WARSHAVIAK, Jehuda, T. [IL/IL]; 14 HaHashmonaim Street, Jerusalem 91608 (IL). (74) Agents: COLB, Sanford, T. et al.; Sanford T. Colb & Co., P.O. Box 2273, 76122 Rehovot (IL).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: HANDLE

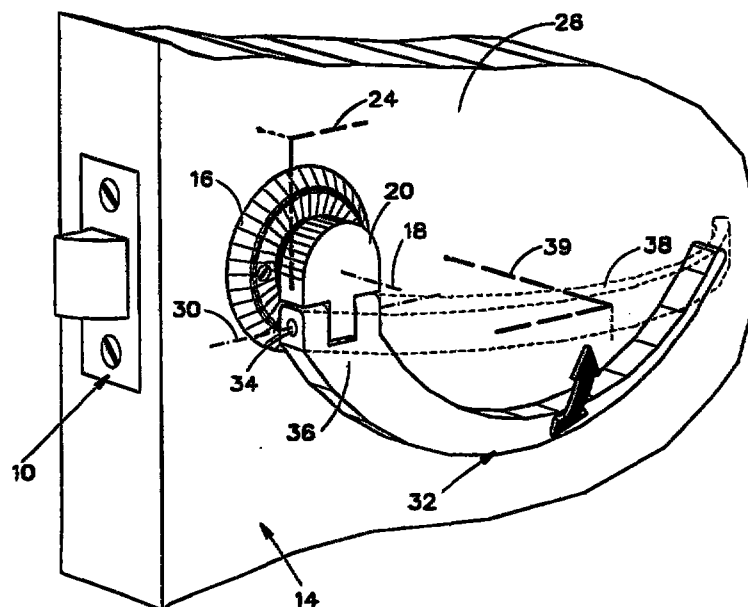

(57) Abstract

The invention discloses a handle arranged for driving operation of an axle (12, 52) about an operation axis (18, 58, 108) thereof, the handle including a first element (20, 60, 82, 110) operatively associated with the axle (12, 52) and extending in a first plane (24, 68, 118) perpendicular to the operating axis (18, 58, 108), and a second element (32, 72, 88, 122) mounted onto the first element (20, 60, 82, 110) and being pivotably mounted with respect to the axle (12, 52) about a second axis (30, 70, 120) lying in the first plane (24, 68, 118), the second element (32, 72, 88, 122) being arranged with respect to the operation axis (18, 58, 108) so as to be not centered about the axis (18, 58, 108).