

(51) International Patent Classification:
G11B 20/18 (2006.01) *G11B 33/02* (2006.01)(21) International Application Number:
PCT/US2011/029391(22) International Filing Date:
22 March 2011 (22.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/316,667 23 March 2010 (23.03.2010) US(71) Applicant (for all designated States except US): **TERA-DYNE, INC.** [US/US]; 600 Riverpark Drive, North Reading, Massachusetts 01864 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SMITH, Marc LeSueur** [US/US]; 105 Flanagan Hill Road, Sterling, Massachusetts 01564 (US). **GARCIA, Edward** [US/US]; 30 Linfield Street, Holbrook, Massachusetts 02343 (US). **MERROW, Brian S.** [US/US]; 81 Lancaster County Road, Harvard, Massachusetts 01451 (US).**POLYAKOV, Evgeny** [US/US]; 157 Jordan Road, Brookline, Massachusetts 02446 (US). **TRUEBEN-BACH, Eric L.** [US/US]; 5 Firecut Lane, Sudbury, Massachusetts 01776 (US).(74) Agents: **PYSHER, Paul A.** et al.; Fish & Richardson P.C., P.O. Box 1022, Minneapolis, Minnesota 55440-1022 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,

[Continued on next page]

(54) Title: BULK TRANSFER OF STORAGE DEVICES USING MANUAL LOADING

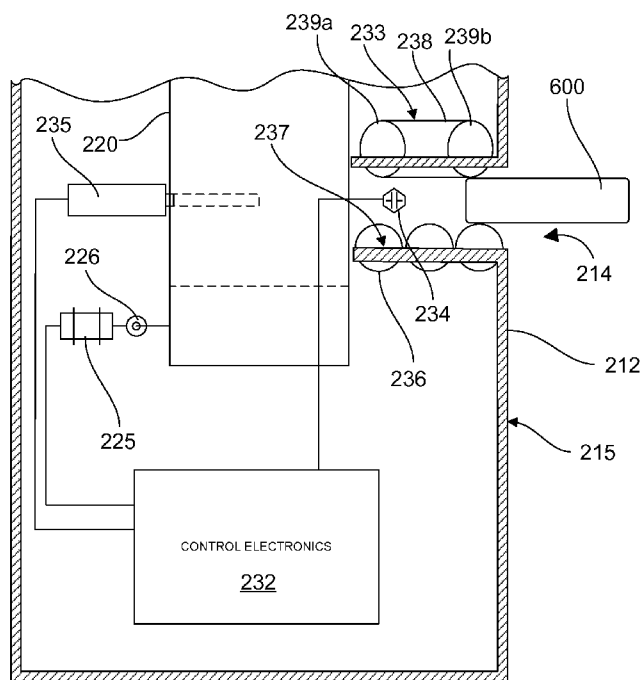


FIG. 10A

(57) Abstract: A storage device transfer station includes a first slot, a second slot, and a conveyor assembly. The conveyor assembly is configured to receive and support a plurality of storage devices such that the storage devices are vertically stacked and in spaced relation to each other. The conveyor assembly is operable to convey the storage devices between the first slot and the second slot.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*