



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: E03D 13/00, 11/10	A1	(11) International Publication Number: WO 99/07953 (43) International Publication Date: 18 February 1999 (18.02.99)
(21) International Application Number: PCT/GB98/02240 (22) International Filing Date: 28 July 1998 (28.07.98) (30) Priority Data: 9716498.2 4 August 1997 (04.08.97) GB (71) Applicant (for all designated States except US): ESKANDER CORPORATION N.V. [NL/NL]; De Ruyterkade 58A, Curacao (AN). (72) Inventors; and (75) Inventors/Applicants (for US only): MITCHELL, Geoff, John [GB/GB]; 32 Fordwich Place, Sandwich, Kent CT13 0RA (GB). GACHOT, Bertrand [FR/GB]; Flat 3, 30/40 Emperors Gate, London SW7 (GB). (74) Agents: POWELL, Stephen, David et al.; Williams, Powell & Associates, 4 St. Paul's Churchyard, London EC4M 8AY (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: WASTE OUTLET DEVICE (57) Abstract A waste outlet device adapted for use with a urinal and comprising one-way valve means (12).		

WASTE OUTLET DEVICE

This invention relates to urinals of a type commonly found in men's lavatories. More specifically, this invention relates to a waste outlet device for a urinal.

- 5 Currently used urinal systems can be divided into two main categories. A first type, in which the receptacle is cleansed by a continuous stream of running water into a wall mounted cistern, containing a symphonic action flush apparatus, and a second type, in which the supply of water into the cistern is
- 10 intermittent and controlled using, for example, via an electrically operated timing or passive infra red sensors in a solenoid valve fitted into the appropriate water supply pipe. Both types can be expensive and inefficient.
- 15 All urinal bowls use conventional water seal traps to prevent foul sewer gases entering washroom areas and also frequently use deodorising means to reduce unpleasant odours from waste pipes or channels. The odours are significantly worsened by the products of chemical reactions between water and urine
- 20 leading to the solidification of salts found in urine which, together with limescale, accumulate in traps creating further problems of odours and blockages.

The present invention seeks to provide an improved urinal


25 waste outlet device.

According to an aspect of the present invention, there is provided a urinal waste outlet device equipped with a one-way valve.

30

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



A suitable one-way valve comprises means for blocking the passage of gas in an upstream direction and means of allowing the passage of waste fluid in a downstream direction, the device being operable to temporarily unblock the waste pipe in
5 the presence of waste fluid by means of an automatic reversible deformation. Preferably, the automatic reversible unblocking action occurs by a transformation of its shape from a closed to an open configuration and back.

10 Preferably, the waste outlet device including the one-way valve element is fitted into the urinal bowl or trough and is connected to the foul drain via the waste pipe.

Such an arrangement operates without the need for a constant
15 or intermittent cleansing or flushing water supply. Because the waste pipe is ordinarily sealed from the foul drain, there is no need for conventional water seal traps or deodorising means. The device is preferably connected within the urinal bowl at the head of the waste pipe system position of the
20 device and the means by which it is connected ensures that it is easily accessible from above the bowl for cleaning, maintaining, and replacing whole or part of the device.

The waste outlet device preferably also includes a device for
25 reducing spattering and a perfumed or deodorising element.

An embodiment of the present invention is described below, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a side view of a urinal system incorporating a conventional waste outlet arrangement;

Figure 2 is a side view of a urinal system incorporating a preferred waste outlet device;

Figure 3 is an exploded side view of a preferred waste outlet device;

Figure 4 is an exploded cross-sectional side view of the waste outlet device of Figure 3;

Figure 5 is a cross-sectional side view of the waste outlet device of Figure 3 in an assembled state; and

Figure 6 is an alternative embodiment of retaining member 18.

With reference to Figures 3 and 4, the main components of a preferred waste outlet device are a sheath 10, a one-way valve element 12, a fragrance unit 14, an anti-spatter shield 16 and a retaining member 18.

Sheath 10 can be made of a moulded plastics material. It is a rigid cylindrical tube which is generally circular in plan view. A portion of the external wall 20 is threaded. An extended protruberance forms a circular lip 22 at the periphery of its upper extremity. Internally, an extended circular protrusion of the wall forms a rigid collar 24. Towards the upper extremity, a shallow groove 26 with a horizontal upper surface 27, runs around the inside of the sheath.

One-way valve element 12, in this example made of an elastomeric substance, generally adopts a flattened frusto-conical shape. This is to say, the upper portion 28 is formed in a substantially rigid annular shape, while the lower portion 26 is flattened so that a seal is made between abutting walls indicated at 32.

Retaining member 18 can be made of any suitable material. It is formed in the shape of a ring 34 having inner 41 and outer 45 walls. In this example, there are three resiliently sprung arms 36 which are equally spaced around the circumference and project inwards and the downwards from the ring 34. Each arm 36 has a catch 40 and is formed with a flat 42 on the bottom surface. A number of upwardly protruding catches 38 are also formed on the outer wall 45 of the main ring 34.

Fragrance unit 14 is perforated and contains a perfume, which is typically, but not necessarily, either a liquid or a gel substance. Fragrance unit 14 need not be rigid or of any particular shape.

Anti-spatter cover 16 is shown as a rigid dome-shaped element. It is preferably chrome plated ABS plastic and has recesses 44 disposed at intervals around the bottom of the inner walls.

With reference to Figure 5, the assembled waste outlet device is shown with one-way valve element 12 inserted into sheath 10 so that the underside of annular portion 28 rests on collar 24. Retaining member 18 is positioned with the flats 42 of respective arms 36 abutting the upper surface 48 of one-way

valve element 12, and thereby holds element 12 firmly in place. The catches 40 engage groove 26 and the horizontal upper surface 27 of the groove provides resistance to upward movement of the retaining member 18 and one-way valve element 12. The fragrance unit 14 is supported by the inwardly projecting horizontal portions 52 of respective arms 36. The anti-spatter cover 16 is positioned over the fragrance unit 14 and the catches 38 on the upper portion of the retainer member engage the recesses 44 on the inner walls 46 of the cover 16.

10

In use, the threaded portion 20 is used to connect waste outlet device 100 substantially within the urine receptacle at the head of the waste pipe system. Typically, an internal portion of the waste outlet pipe adjoining the urinal from below is adapted to receive the threaded outer portion 20 of sheath 10. Referring to Figure 2, the anti-spatter cover 16 can be seen (broken lines) protruding upwards into the urinal bowl.

15

When urine enters the bowl, it runs off the bowl walls and the anti-spatter cover 16, through an annular gap 50 (see Figure 5) and over the lip 22 of sheath 10.

20

Before urine enters one-way valve element 12, the element is in the closed state (a flattened frusto-conical shape with abutting walls at 32 sealing the waste pipe from the urine receptacle), thereby preventing malodorous gases from leaking in an upstream direction. As urine enters, the shape of one-way valve element 12 undergoes a temporary deformation.

25

During the deformation process, the shape of element 12 tends away from the flattened frusto-conical form and towards a more

30

cylindrical form in which abutting walls at 32 become parted. In this condition, the seal is broken and the urine flows into the waste pipe. Once all the urine has passed through the waste outlet device, element 12 returns to a flattened frusto-
5 conical shape, thereby re-establishing the seal between abutting walls 32.

A preferred waste outlet device permits a substantially waterless urinal system. For example, water is not necessary
10 to maintain a minimum water level in a trap nor to wash/flush the bowl and waste pipe system, either continuously or intermittently. Thus vast quantities of water can be saved. Cleansing and maintenance operations are required only occasionally and all components of the waste outlet device are
15 accessible from above the urinal bowl. The underside of the urinal bowl is free from the encumbrance of bulky fittings.

Malodourous gases are confined within the waste pipe network without the need for conventional U-bends, bottles or P-type
20 traps. Use of the one way valve element obviates the need for each urinal waste pipe to have an air vent (vent pipe) as the system does not rely on waste seal traps and, therefore, is not effected by pressure variation in the waste pipe and problems associated with, leakage, compression, capillary
25 action, wavering out, evaporation, momentum induced siphonage or self siphonage.

The components are simple and robust. Retainer member 18 can be released at catches 38, to permit removal of anti-spatter
30 cover 16, for example to replace or maintain the fragrance unit 14. Alternatively, retainer 18 can be released at catches

40, to facilitate replacement or maintenance of the one-way valve element 12.

The device can be produced in any desirable size, for example
5 to comply with 1.25 inch (32 mm) or 1.5 inch (40 mm) standard fittings or with any desirable connection means to enable use with different urine receptacle types, such as troughs and slabs. According to a modified version of the device, the upper portion of the waste pipe system provides the internal
10 features of sheath 10, with element 12 being seated directly therein.

Other modified versions of the waste outlet device may have different assembly configurations such as catch types. For
15 example, with reference to Fig.6, retaining member 18 can be in the form of an annular disk member having an upper surface 35 and a central opening which is slightly smaller in diameter than the base dimension of the fragrance unit 14. The resiliently sprung arms 36' protrude directly from the inner
20 portion 60 of the disk, whereas catches 38' are cut from outer wall 45'. This modified retainer member supports the fragrance unit 14 on the upper surface 35 of the annular disk member. In other respects it is similar to the corresponding member described earlier.

25

Instead of recesses 44, the antispatter cover 16 can be provided with a continuous annular groove circumscribing the inside of its dome at an appropriate level. Latches 38 engage portions around the annular groove in the same way as
30 described for the recesses 44.

Although not strictly necessary, purpose built tools can be provided to assist in the removal of the various components for cleaning, maintenance or replacement.

- 5 A bayonet-type locking mechanism may be preferred to catch types 38 and 40. The various component parts may push fit into their respective positions to be held in place by gravity, or screw or be attached by any other suitable means
- 10 It would also be possible to produce and supply the retainer 18, fragrance unit 14 and/or anti-spatter cover 16 as a single integral replacement unit.

- To minimise unpleasant smells from the waste pipe system, it
- 15 is generally preferred to connect the waste outlet device as far upstream as possible. That is not to say that one or more modified versions of the device cannot also be inserted at intervals downstream.

CLAIMS

1. A waste outlet device adapted for use with a urinal and
5 comprising one-way valve means.
2. A device according to claim 1, adapted for connection in
a position upstream of the waste pipe system and substantially
within the urinal bowl.
- 10 3. A device according to any preceding claim, wherein the
one-way valve means includes means for blocking the passage of
gas in an upstream direction and for allowing the passage of
waste fluid in a downstream direction.
- 15 4. A device according to any preceding claim, said one-way
valve means being operable to temporarily unblock the waste
pipe in the presence of waste fluid by means of an automatic
reversible deformation in shape.
- 20 5. A device according to any preceding claim, comprising a
sheath member for housing the one-way valve means and being
adapted at an outer portion to connect with the head of the
general waste pipe system.
- 25 6. A device according to any preceding claim, comprising a
perfumed or deodorising element.
7. A device according to any preceding claim, comprising an
30 anti-spatter member.

This Sheet Has Been Replaced



SUBSTITUTE SHEET (RULE 26)

THIS SHEET HAS BEEN
REPLACED



8. A device according to claim 7, wherein the perfumed element is housed substantially within the anti-spatter member.

5 9. A device according to any preceding claim, comprising a releasable retaining member for retaining the one-way valve member in place inside the sheath.

10 10. A device according to claim 9, wherein the retaining member also releasably retains the anti-spatter member.

11. A urinal fitted with a device according to any preceding claim.



15 12. A method of operating a urinal equipped with a waste outlet device comprising one-way valve means substantially without a continuous or intermittent supply of flushing water.

This Sheet Has Been Replaced



REPLACED
OF THIS SHEET HAS BEEN

1/5

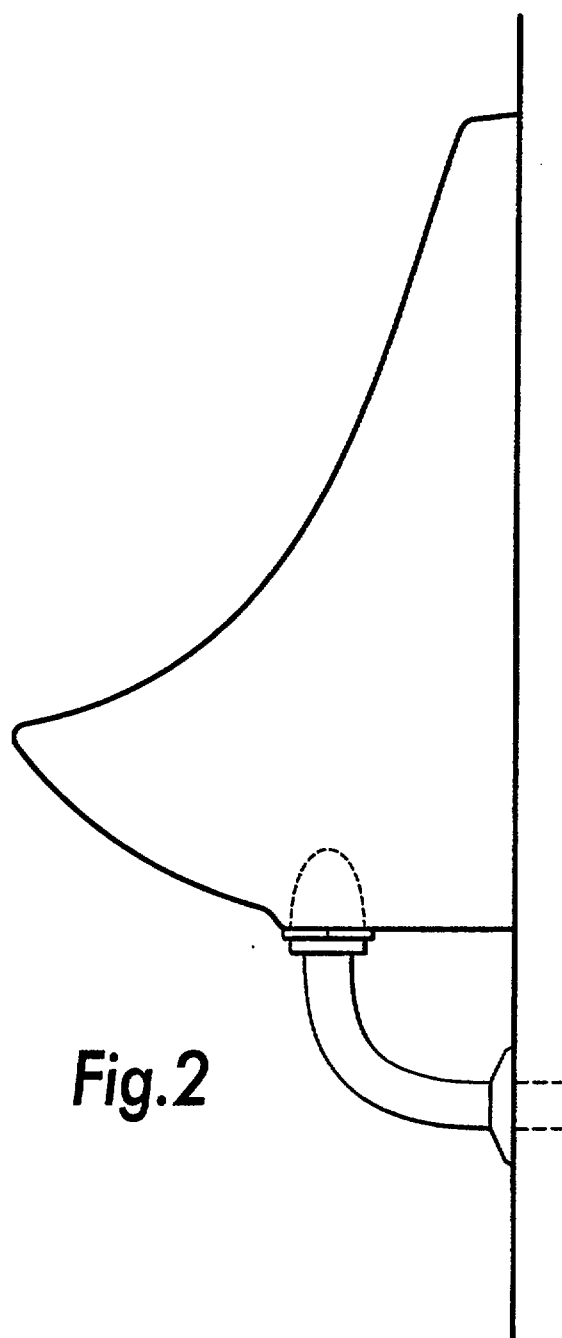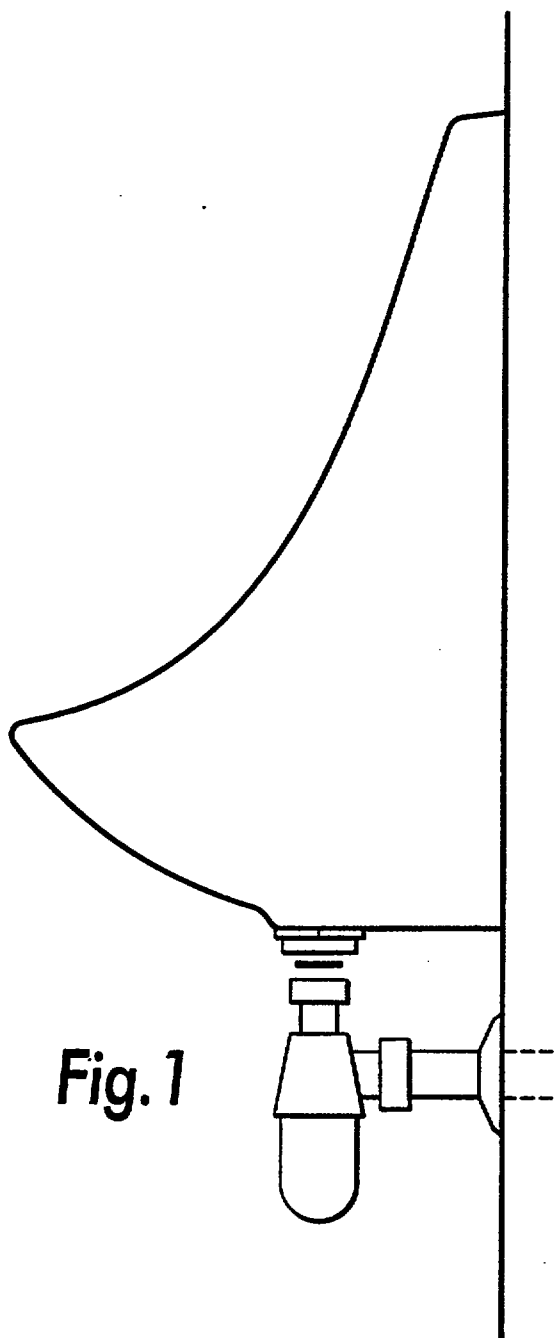

2/5

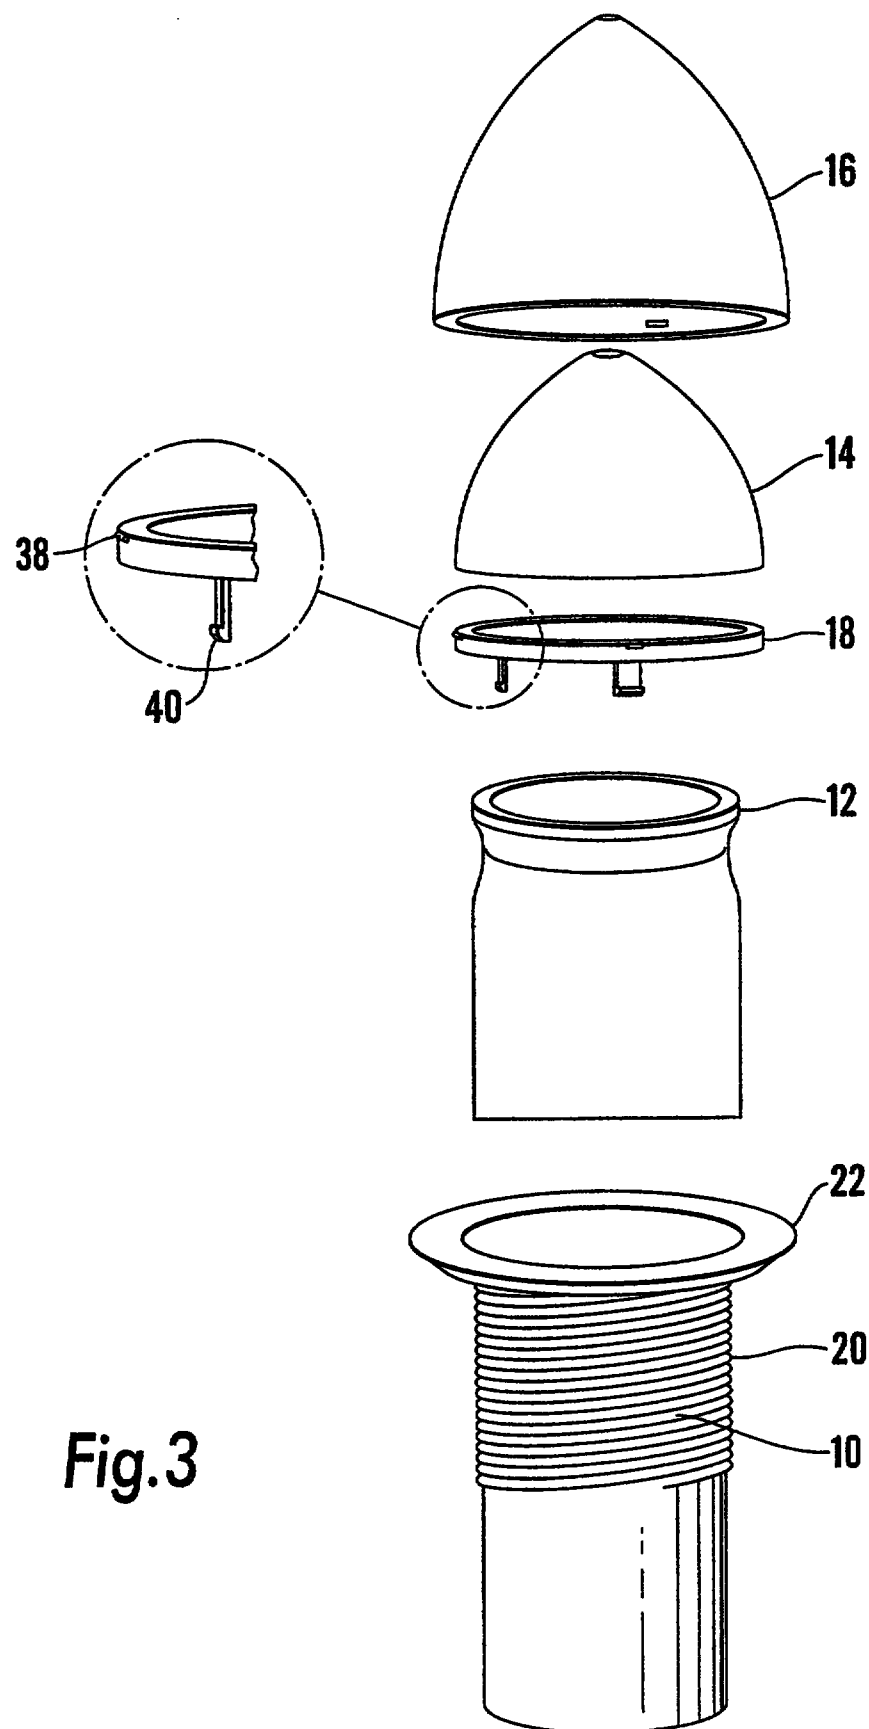


Fig.3

3/5

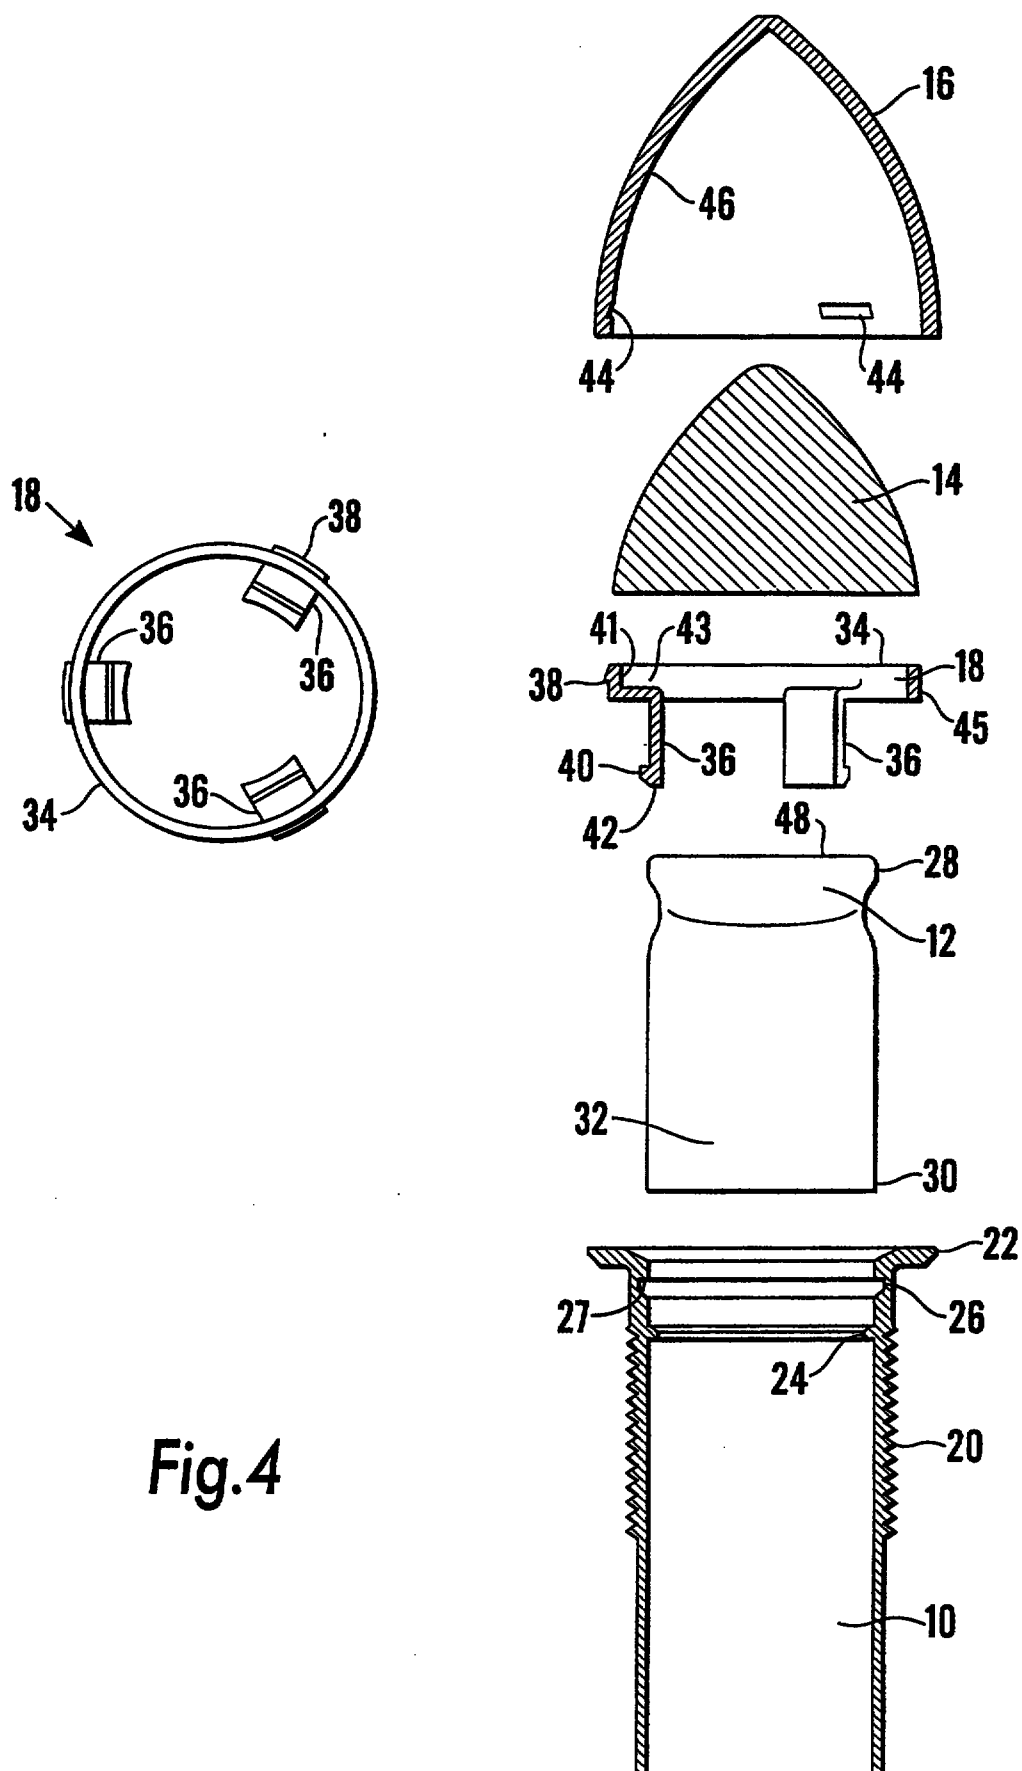


Fig.4

4/5

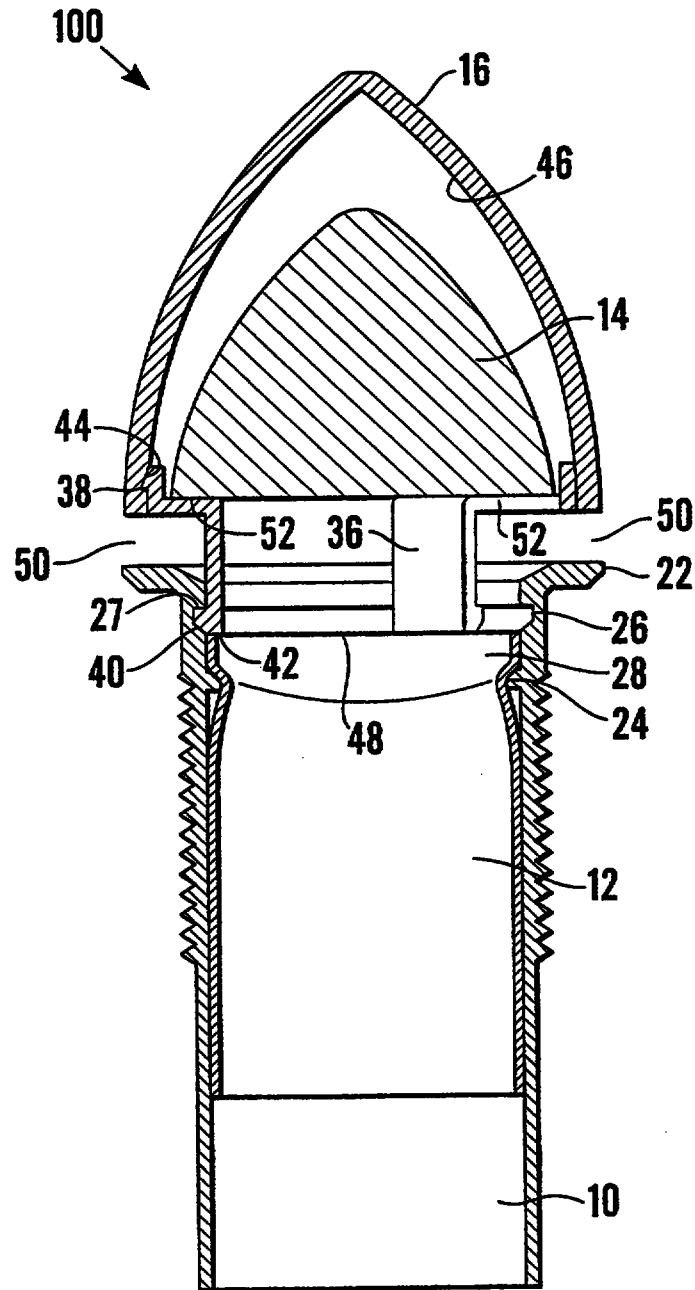


Fig.5

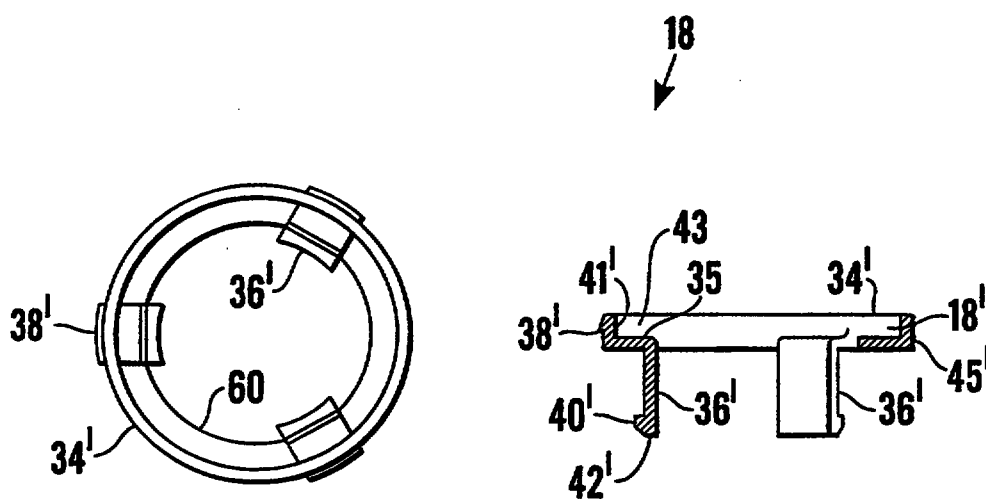


Fig. 6

WASTE OUTLET DEVICE

This invention relates to urinals of a type commonly found in men's lavatories. More specifically, this invention relates to a waste outlet device for a urinal.

- 5 Currently used urinal systems can be divided into two main categories. A first type, in which the receptacle is cleansed by a continuous stream of running water into a wall mounted cistern, containing a symphonic action flush apparatus, and a second type, in which the supply of water into the cistern is
- 10 intermittent and controlled using, for example, via an electrically operated timing or passive infra red sensors in a solenoid valve fitted into the appropriate water supply pipe. Both types can be expensive and inefficient.
- 15 All urinal bowls use conventional water seal traps to prevent foul sewer gases entering washroom areas and also frequently use deodorising means to reduce unpleasant odours from waste pipes or channels. The odours are significantly worsened by the products of chemical reactions between water and urine
- 20 leading to the solidification of salts found in urine which, together with limescale, accumulate in traps creating further problems of odours and blockages.

The present invention seeks to provide an improved urinal

25 waste outlet device.

According to an aspect of the present invention, there is provided a urinal as specified in claim 1.

This Sheet Has Been Replaced



AMENDED SHEET

CLAIMS

1. A urinal including a urinal bowl and a waste outlet device comprising one-way valve means (12), characterised in
5 that the one-way valve means is removable from within the urinal bowl.
2. A urinal according to claim 1, wherein the one-way valve means (12) includes means (32) for blocking the passage of gas
10 in an upstream direction and for allowing the passage of waste fluid in a downstream direction.
3. A urinal according to claim 1 or 2, wherein the one-way valve means (12) is operable temporarily to unblock the waste
15 pipe in the presence of waste fluid by means of an automatic reversible deformation in shape.
4. A urinal according to any preceding claim, wherein the waste outlet device comprises a sheath member (20) for housing
20 the one-way valve means and designed at an outer portion (22) to connect with a head of a general waste pipe system of the urinal.
5. A urinal according to claim 4, comprising a releasable
25 retaining member (18) for retaining the one-way valve member (12) in place inside the sheath member.
6. A device according to claim 5, wherein the retaining member (18) releasably retains an anti-spatter member (16).
30
7. A urinal according to any preceding claim, wherein the waste outlet device comprises a perfumed or deodorising element (14).
- 35 8. A urinal according to any preceding claim, wherein the waste outlet device comprises an anti-spatter member (16).

This Sheet Has Been Replaced

AMENDED SHEET



9. A urinal according to claim 7 and 8, wherein the perfumed or deodorising element (14) is housed substantially within the anti-spatter member (16).

This Sheet Has Been Replaced



CLAIMS

1. A Urinal bowl waste outlet device including one-way valve means mountable so as to be removable from within the urinal bowl, wherein said one-way valve means does not trap fluid within the device.

2. A device according to claim 1, wherein the one-way valve means is openable to allow the passage of waste fluid from the urinal bowl and closable to block the passage of gas in an upstream direction.


3. A device according to any preceding claim, wherein said one-way valve means opens by means of an automatic reversible deformation in shape.

4. A device according to any preceding claim, including a sheath member for housing the one-way valve means and connectable at an outer portion thereof with the head of a general waste pipe system.

5. A device according to claim 4, including a retaining member for releasably retaining the one-way valve means in place inside the sheath member.


6. A device according to any preceding claim, including an anti-spatter matter.

7. A device according to any preceding claim, including a perfumed or deodorising element.

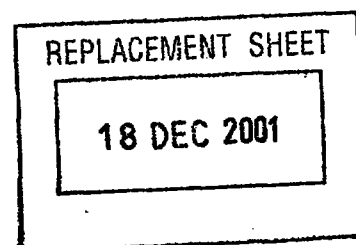



8. A device according to claim 6, including a perfumed or deodorising element housed substantially within the anti-spatter matter.
9. A urinal bowl waste outlet device, including:
- (i) one-way valve means removable from the device;
 - (ii) a sheath member for housing the one-way valve means, wherein said sheath member is designed at an outer portion to connect with a head of a general waste pipe system of the urinal; and
 - (iii) a retaining member for releasably retaining the one-way valve means in place inside the sheath member.
10. A device according to claim 9, including an anti-spatter member (16), wherein the retaining member releasably retains the anti-spatter member.
11. A urinal according to claim 9 or 10, wherein the waste outlet device comprises a perfumed or deodorising element.
12. A urinal according to claim 10 or 11, wherein the perfumed or deodorising element is housed substantially within the anti-spatter member.
13. A urinal bowl waste outlet device including one-way valve means mountable so as to be removable from the urinal bowl and a deodorising element.
14. A device according to claim 13, including mounting means for mounting the deodorising element above the one-way valve means.

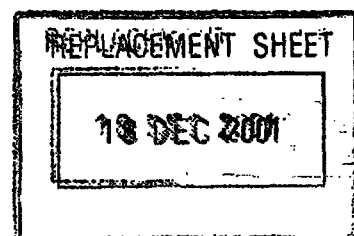



15. A device according to claim 14, including an anti-spatter member, wherein the mounting means is designed to mount the anti-spatter member above the one-way valve means with the deodorising element within the anti-spatter member.

16. A urinal fitted with a device according to any preceding claim.

17. A method of operating a urinal equipped with a waste outlet device according to any one of claims 1 to 15 substantially without a continuous or intermittent supply of flushing water.

