



(51) International Patent Classification:

A41D 3/04 (2006.01) *D06C 7/00* (2006.01)
D05B 1/00 (2006.01)

(21) International Application Number:

PCT/SG2010/000223

(22) International Filing Date:

14 June 2010 (14.06.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

200904050-2 12 June 2009 (12.06.2009) SG

(71) Applicant (for all designated States except US): **VENTURA PACIFIC CORPORATION PTE LTD** [SG/SG]; 8 Eu Tong Sen Street, #15-38, The Central, Singapore 059818 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WIELGOS, Tadeusz** [AU/ID]; Jl. Brawijaya Golf Nr. 1, Taman Mediterranean Golf, Lippo Village, Tangerang 15811 (ID).

(74) Agent: **ELLA CHEONG SPRUSON & FERGUSON (SINGAPORE) PTE LTD**; P O Box 1531, Robinson Road, Post Office 903031 (SG).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEM AND METHOD TO SEAM SEAL TEXTILE PRODUCTS

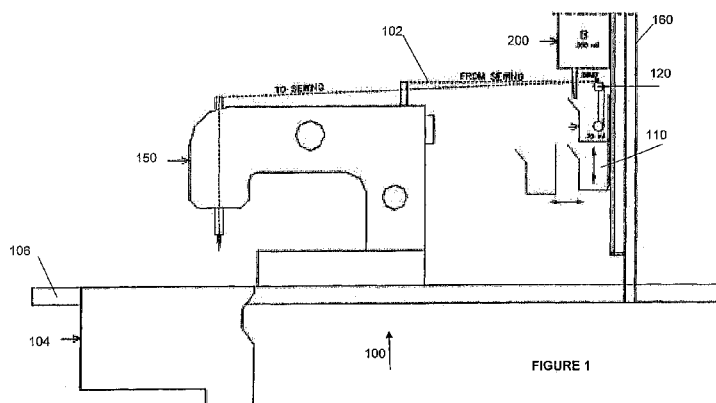

(57) Abstract: Embodiments of the present invention provide a method for producing a waterproof seam in a textile product, the method comprising the steps of: immersing a thread in a polymer solution to soak said thread; sewing a seam in the product with said polymer soaked thread; and curing said seam to form a watertight seal. A system for implementing the method is also described.