
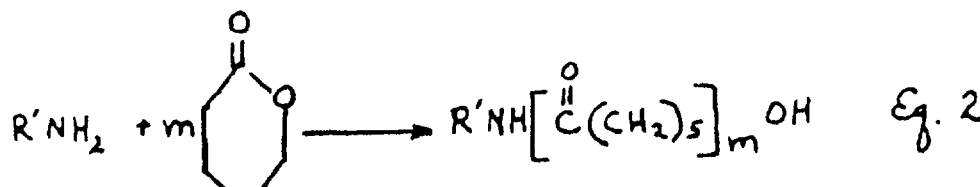


Description

This invention relates to improved oil soluble dispersant additives useful oleaginous compositions, including fuel and lubricating oil compositions, and to concentrates containing said additives.

It is known that polymers of 6 to 10 membered lactones such as valerolactone or epsiloncaprolactone, hereinafter E-caprolactone, can be prepared by reacting the lactone monomer with a hydroxyl or amine initiator. When reacting E-caprolactone, for example, the polymerization reaction may be illustrated by the following equations :

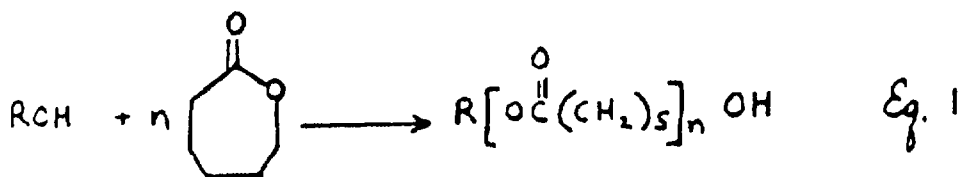

The reactions are known to be catalyzed by various esterification catalysts such as stannous octanoate, and a variety of different molecular weight products are feasible depending upon the ratio of lactone to initiator. Molecular weights on the order of from a few hundred up to about 5,000 are reproducibly achievable.

Caprolactone can also be polymerized to a very high molecular weight, e.g., on the order of 100,000 or more. Typically such high molecular weight polymers do not employ initiators and preservation of functionality is not a requirement.


It is also known to react a lactone such as E-caprolactone with a diamine wherein one of the diamine groups is a tertiary amine and the other amine group is a primary or secondary amine to form a polycaprolactone polymer having a tertiary amine group at one end and a primary hydroxyl group at the other end. The polycaprolactone polymer would be used to neutralize polymeric acids.

It has now been found that oil soluble dispersant additives, useful in fuel and lubricating oil compositions, including concentrates containing the additives, can be prepared by polymerizing a 6 to 10 membered lactone using as the initiator those lactone-reactive functions contained within certain oil soluble dispersants that have been substituted with a high molecular weight hydrocarbon group. US-A-4379914 and US-A-4463168 disclose the preparation of polycaprolactone polymers by reacting Ecaprolactone with a diamine wherein one of the amine groups of the diamine is a tertiary amine and the other is a primary or secondary amine. The polycaprolactone polymers are disclosed as being useful for neutralizing certain sulfonic acid- containing polymers to form amine-neutralized sulfonated derivatives.

US-A-3169945 discloses the preparation of lactone polyesters which are useful as plasticizers and as intermediates for preparing elastomers and foams. The polyesters can be prepared by reacting a lactone such as E-caprolactone with an initiator such as an alcohol, amine or amino alcohol.

US-A-4532058 discloses as a motor oil dispersant a spiro lactone condensation product formed by heating alkenyl succinic anhydrides in the presence of a basic catalyst, and then heating the resulting bicyclic spirod lactone condensation product with a polyamine or polyamine alcohol. It should be emphasized that this patent describes the intermolecular decarboxylation of an alkenyl succinic anhydride at elevated temperatures to form a condensation product and carbon dioxide as a by-product. This prior art is not concerned with polymerizable lactones which are the subject of the instant invention.

The present invention is directed to a dispersant additive comprising at least one adduct of (A) a polyolefin of 300 to 10,000 number average molecular weight substituted with at least 0.8 (e.g., from about 1 to 4) dicarboxylic acid producing moieties (preferably acid or anhydride moieties) per polyolefin molecule, (B) an amido-amine or thioamido-amine characterized by being a reaction product of at least a polyamine and an alpha, beta unsaturated compound of the formula :



wherein X is sulfur or oxygen, Y is —OR⁴, —SR⁴, or —NR⁴(R⁵), and R¹, R², R³, R⁴ and R⁵ are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl and (C) a C₅ to C₉ lactone material.

The materials of the invention are different from the prior art because of their effectiveness and their ability to provide enhanced lubricating oil dispersancy.

Therefore, the present invention is also directed to novel processes for preparing the dispersant adducts of his invention.

A further object is to provide lubricant compositions and concentrates containing the novel poly (C5-C9 lactone) adducts of this invention.

Still another object is to provide metal complexes and other post-treated derivatives, e.g., borated derivatives, of the novel poly (C5-C9 lactone) adducts of this invention, as well as lubricant compositions and concentrates containing such posttreated derivatives.

The manner in which these and other objects can be achieved will be apparent from the detailed description of the invention which appears hereinbelow.

The novel poly (C5-C9 lactone) adducts of this invention are useful per se as an additive, e.g. a dispersant additive, for example in the same manner as disclosed in US-A-3219666 where prior art derivatives of polyalkenyl succinic acids and nitrogen compounds are used as dispersant/detergents in lubricants, especially lubricants intended for use in the crankcase of internal combustion engines, gears, and power transmitting units. Accordingly, one or more objects of the invention are achieved by providing lubricating oil compositions, e.g. automatic transmission fluids, heavy duty oils suitable for use in the crankcases of gasoline and diesel engines, etc. containing the novel poly (C5-C9 lactone) adducts of this invention. Such lubricating oil compositions may contain additional additives such as viscosity index improvers, antioxidants, corrosion inhibitors, detergents, pour point depressants, antiwear agents, etc.

Still further objects are achieved by providing concentrate compositions comprising from 20 to 80 wt.% of a normally liquid, substantially inert, organic solvent/diluent, e.g. mineral lubricating oil, or other suitable solvent/diluent and from 20 to 80 wt.% of a poly (C5-C9 lactone) adduct, as mentioned above and described in more detail hereinafter.

DETAILED DESCRIPTION OF THE INVENTION

PREPARATION OF CARBOXYLIC-PRODUCING REACTANT A

The long chain hydrocarbyl substituted mono or dicarboxylic acid material, i.e., acid, anhydride, or ester, used in reactant A used in this invention comprises long chain hydrocarbon, generally a polyolefin, substituted with an average of at least 0.8, more typically from about 1 to 4, preferably from 1.05 to 1.8, e.g., 1.10 to 1.6 moles, per molecule of polyolefin, of an alpha or beta-unsaturated C₄ to C₁₀ dicarboxylic acid, or anhydride or ester thereof. Exemplary of such dicarboxylic acids, anhydrides and esters thereof are fumaric acid, itaconic acid, maleic acid, maleic anhydride, chloromaleic acid, dimethyl fumarate, chloromaleic anhydride, acrylic acid, methacrylic acid, crotonic acid and cinnamic acid.

Preferred olefin polymers for reaction with the unsaturated dicarboxylic acids to form reactant A are polymers comprising a major molar amount of C₂ to C₁₀, e.g. C₂ to C₅ monoolefin. Such olefins include ethylene, propylene, butylene, isobutylene, pentene, octene-1, styrene, etc. The polymers can be homopolymers such as polyisobutylene, as well as copolymers of two or more of such olefins such as copolymers of: ethylene and propylene; butylene and isobutylene; propylene and isobutylene; etc. Other copolymers include those in which a minor molar amount of the copolymer monomers, e.g., 1 to 10 mole%, is a C₄ to C₁₈ non-conjugated diolefin, e.g., a copolymer of isobutylene and butadiene: or a copolymer of ethylene, propylene and 1,4-hexadiene; etc.

In some cases, the olefin polymer may be completely saturated, for example an ethylene-propylene copolymer made by a Ziegler-Natta synthesis using hydrogen as a moderator to control molecular weight.

The olefin polymers used in the reactant A dispersants will generally have number average molecular weights within the range of from 300 to 10,000, desirably from 700 to 10,000, preferably from 900 to 5,000, more preferably between 1300 and 4,000. Particularly useful olefin polymers have number average molecular weights within the range of from 1500 and to 3000 with approximately one terminal double bond per polymer chain. An especially useful starting material for highly potent dispersant additives useful in accordance with

this invention is polyisobutylene. The number average molecular weight for such polymers can be determined by several known techniques. A convenient method for such determination is by gel permeation chromatography (GPC) which additionally provides molecular weight distribution information, see W. W. Yau, J.J. Kirkland and D.D. Bly, "Modern Size Exclusion Liquid Chromatography", John Wiley and Sons, New York, 1979.

Processes for reacting the olefin polymer with the C₄₋₁₀ unsaturated dicarboxylic acid, anhydride or ester are known in the art. For example, the olefin polymer and the dicarboxylic acid material may be simply heated together as disclosed in US-A-3361673 and 3401118 to cause a thermal "ene" reaction to take place. Or, the olefin polymer can be first halogenated, for example, chlorinated or brominated to 1 to 8 wt.%, preferably 3 to 7 wt.% chlorine, or bromine, based on the weight of polymer, by passing the chlorine or bromine through the polyolefin at a temperature of 60 to 250°C, e.g. 120 to 160°C, for about 0.5 to 10, preferably 1 to 7 hours. The halogenated polymer may then be reacted with sufficient unsaturated acid or anhydride at 100 to 250°C, usually from 180° to 235°C, for from 0.5 to 10, e.g. 3 to 8 hours, so the product obtained will contain the desired number of moles of the unsaturated acid per mole of the halogenated polymer. Processes of this general type are taught in US-A-3087436 ; 3172892 ; 3272746 and others.

Alternatively, the olefin polymer, and the unsaturated acid material are mixed and heated while adding chlorine to the hot material. Processes of this type are disclosed in US-A-3215707 ; 3231587 ; 3912764 ; 4110349 ; 4234435 ; and in GB-A-1440219.


By the use of halogen, from 65 to 95 wt.% of the polyolefin, e.g. polyisobutylene will normally react with the dicarboxylic acid material. Upon carrying out a thermal reaction without the use of halogen or a catalyst, then usually only from 50 to 75 wt.% of the polyisobutylene will react. Chlorination helps increase the reactivity. For convenience, the aforesaid functionality ratios of dicarboxylic acid producing units to polyolefin, e.g., 1.1 to 1.8, etc. are based upon the total amount of polyolefin, that is, the total of both the reacted and unreacted polyolefin, used to make the product.

The reactant A material will be contacted with the selected reactant B amido-amine material for formation of the novel dispersants of this invention, as will be more fully explained below.


Preparation of Amido-Amine Reactant B

As described above, the amido-amine or thioamido-amine comprises a reaction product of at least a polyamine and an alpha, beta ethylenically unsaturated compound of formula (I) above.

The polyamines useful in this invention comprise polyamines, most preferably polyalkylene polyamines, of about 2 to 60, preferably 2 to 40 (e.g. 3 to 20), total carbon atoms (and preferably the alkylene groups contain 2 to 6 carbon atoms) and about 1 to 12, preferably 3 to 12, and most preferably at least 5 (e.g., 5 to 9) nitrogen atoms in the molecule. These amines may be hydrocarbyl amines or may be hydrocarbyl amines including other groups, e.g., hydroxy groups, alkoxy groups, amide groups, nitriles, imidazoline groups, and the like. Hydroxy amines with 1 to 6 hydroxy groups, preferably 1 to 3 hydroxy groups are particularly useful. Preferred amines are aliphatic saturated amines, including those of the general formulas :

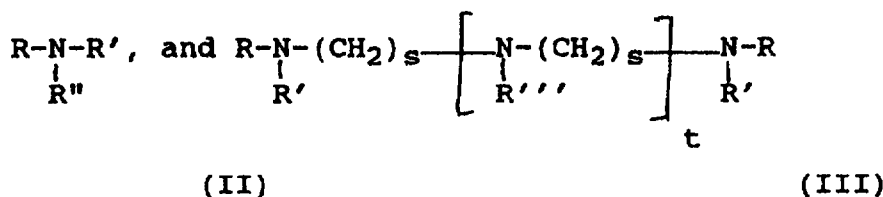


wherein R, R', R'' and R''' are independently selected from the group consisting of hydrogen ; C₁ to C₂₅ straight or branched chain alkyl radicals ; C₁ to C₁₂ alkoxy C₂ to C₆ alkylene radicals ; C₂ to C₁₂ hydroxy amino alkylene radicals ; and C₁ to C₁₂ alkylamino C₂ to C₆ alkylene radicals ; and wherein R''' can additionally comprise a moiety of the formula :

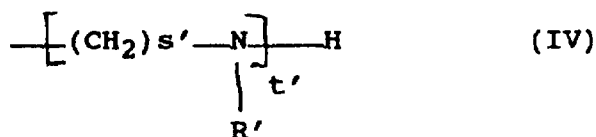

wherein R' is as defined above, and wherein s and s' can be the same or a different number of from 2 to 6, preferably 2 to 4; and t and t' can be the same or different and are numbers of from 0 to 10, preferably 2 to 7, and most preferably 3 to 7, with the proviso that the sum of t and t' is not greater than 15. To assure a facile reaction, it is preferred that R, R', R'', R''', s, s', t and t' be selected in a manner sufficient to provide the compounds of Formulas II and III with typically at least one primary or secondary amine group, preferably at least two primary or secondary amine groups. This can be achieved by selecting at least one of said R, R', R'' or R''' groups to be hydrogen or by letting t in Formula III be at least one when R''' is H or when the IV moiety possesses a secondary amino group. The most preferred amine of the above formulas are represented by Formula III and contain at least two primary amine groups and at least one, and preferably at least three, secondary amine groups.

Non-limiting examples of suitable amine compounds include: 1,2-diaminoethane; 1,3-diaminopropane; 1,4-diaminobutane; 1,6-diaminohexane; polyethylene amines such as diethylene triamine; triethylene tetramine; tetraethylene pentamine; polypropylene amines such as 1,2-propylene diamine; di-(1,2-propylene) triamine; di-(1,3-propylene) triamine; N,N-dimethyl-1,3-diaminopropane; N,N-di-(2-aminoethyl) ethylene diamine; N,N-di(2-hydroxyethyl)-1,3-propylene diamine; 3-dodecyloxypropylamine; N-dodecyl-1,3-propane diamine; tris hydroxymethylaminomethane (THAM); diisopropanol amine; diethanol amine; triethanol amine; mono-, di-, and tri-tallow amines; amino morpholines such as N-(3-aminopropyl)morpholine; and mixtures thereof.


Other useful amine compounds include: alicyclic diamines such as 1,4-di(aminomethyl) cyclohexane, and heterocyclic nitrogen compounds such as imidazolines, and N-aminoalkyl piperazines of the general formula (V):

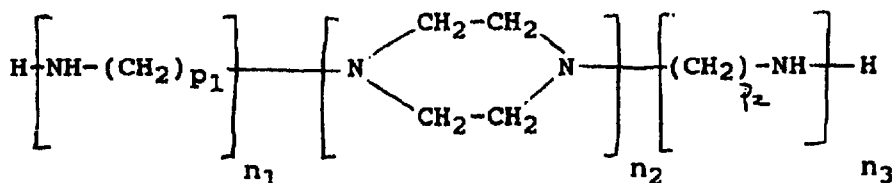


wherein p_1 and p_2 are the same or different and are each integers of from 1 to 4, and n_1 , n_2 and n_3 are the same or different and are each integers of from 1 to 3. Non-limiting examples of such amines include 2-pentadecyl imidazoline; N-(2-aminoethyl) piperazine; etc.

Commercial mixtures of amine compounds may advantageously be used. For example, one process for preparing alkylene amines involves the reaction of an alkylene dihalide (such as ethylene dichloride or propylene dichloride) with ammonia, which results in a complex mixture of alkylene amines wherein pairs of nitrogens are joined by alkylene groups, forming such compounds as diethylene triamine, triethylenetetramine, tetraethylene pentamine and isomeric piperazines. Low cost poly(ethyleneamines) compounds averaging about 5 to 7 nitrogen atoms per molecule are available commercially under trade names such as "Polyamine H", "Polyamine 400", "Dow Polyamine E-100", etc.

Useful amines also include polyoxyalkylene polyamines such as those of the formulae:



where m has a value of about 3 to 70 and preferably 10 to 35; and




where "n" has a value of about 1 to 40 with the provision that the sum of all the n's is from about 3 to about 70 and preferably from 6 to 35, and R is a polyvalent saturated hydrocarbon radical of up to ten carbon atoms wherein the number of substituents on the R group is represented by the value of "a", which is a number of from 3 to 6. The alkylene groups in either formula (VI) or (VII) may be straight or branched chains containing 2 to 7, and preferably 2 to 4 carbon atoms.

The polyoxyalkylene polyamines of formulas (VI) or (VII) above, preferably polyoxyalkylene diamines and polyoxyalkylene triamines, may have average molecular weights ranging from 200 to 4000 and preferably from 400 to 2000. The preferred polyoxyalkylene polyoxyalkylene polyamines include the polyoxyethylene and polyoxypropylene diamines and the polyoxypropylene triamines having average molecular weights ranging from about 200 to 2000. The polyoxyalkylene polyamines are commercially available and may be obtained, for example, from the Jefferson Chemical Company, Inc. under the trade name "Jeffamines D-230, D-400, D-1000, D-2000, T-403", etc.

Additional amines useful in the present invention are described in US-A-3445441.

Thus, any polyamine, whether aliphatic, cycloaliphatic, aromatic, heterocyclic, etc., can be employed provided it is capable of adding across the acrylic double bond and amidifying with for example the carbonyl group (—C(O)—) of the acrylate-type compound of formula I, or with the thiocarbonyl group (—C(S)—) of the thioacrylate-type compound of formula I.

The alpha, beta ethylenically unsaturated compounds employed in this invention comprise at least one member selected from the group consisting of alpha, beta ethylenically unsaturated compounds of the formula:




wherein X is sulfur or oxygen, Y is —OR^4 , —SR^4 , or $\text{—NR}^4(\text{R}^5)$, and R^1 , R^2 , R^3 , R^4 and R^5 are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl.

When R^1 , R^2 , R^3 , R^4 or R^5 are hydrocarbyl, these groups can comprise alkyl, cycloalkyl, aryl, alkaryl, aralkyl or heterocyclic, which can be substituted with groups which are substantially inert to any component of the reaction mixture under conditions selected for preparation of the amido-amine. Such substituent groups include hydroxy, halide (e.g., Cl, F, I, Br), —SH and alkylthio. When one or more of R^1 through R^5 are alkyl, such alkyl groups can be straight or branched chain, and will generally contain from 1 to 20, more usually from 1 to 10, and preferably from 1 to 4, carbon atoms. Illustrative of such alkyl groups are methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, dodecyl, tridecyl, hexadecyl, octadecyl and the like. When one or more of R^1 through R^5 are aryl, the aryl group will generally contain from 6 to 10 carbon atoms (e.g., phenyl, naphthyl).


When one or more of R^1 through R^5 are alkaryl, the alkaryl group will generally contain from about 7 to 20 carbon atoms, and preferably from 7 to 12 carbon atoms. Illustrative of such alkaryl groups are tolyl, m-ethylphenyl, o-ethyltolyl, and m-hexyltolyl. When one or more of R^1 through R^5 are aralkyl, the aryl component generally consists of phenyl or (C_1 to C_6) alkyl-substituted phenol and the alkyl component generally contains from 1 to 12 carbon atoms, and preferably from 1 to 6 carbon atoms. Examples of such aralkyl groups are benzyl, o-ethylbenzyl, and 4-isobutylbenzyl. When one or more of R^1 and R^5 are cycloalkyl, the cycloalkyl group will generally contain from 3 to 12 carbon atoms, and preferably from 3 to 6 carbon atoms. Illustrative of such cycloalkyl groups are cyclopropyl, cyclobutyl, cyclohexyl, cyclooctyl, and cyclododecyl. When one or more of R^1 through R^5 are heterocyclic, the heterocyclic group generally consists of a compound having at least one ring of 6 to 12 members in which one or more ring carbon atoms is replaced by oxygen or nitrogen. Examples of such heterocyclic groups are furyl, pyranlyl, pyridyl, piperidyl, dioxanyl, tetrahydrofuryl, pyrazinyl and 1,4-oxazinyl.

The alpha, beta ethylenically unsaturated carboxylate compounds employed herein have the following formula:




wherein R¹, R², R³, and R⁴ are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl as defined above. Examples of such alpha, beta-ethylenically unsaturated carboxylate compounds of formula VIII are acrylic acid, methacrylic acid, the methyl, ethyl, isopropyl, n-butyl, and isobutyl esters of acrylic and methacrylic acids, 2-butenic acid, 2-hexenoic acid, 2-decenoic acid, 3-methyl-2-heptenoic acid, 3-methyl-2-butenic acid, 3-phenyl-2-propenoic acid, 3-cyclohexyl-2-butenic acid, 2-methyl-2-butenic acid, 2-propyl-2-propenoic acid, 2-isopropyl-2-hexenoic acid, 2,3-dimethyl-2-butenic acid, 3-cyclohexyl-2-methyl-2-pentenamide, 2-propenoic acid, methyl 2-propenoate, methyl 2-methyl 2-propenoate, methyl 2-butenate, ethyl 2-hexenoate, isopropyl 2-decenoate, phenyl 2-pentenamide, tertiary butyl 2-propenoate, octadecyl 2-propenoate, dodecyl 2-decenoate, cyclopropyl 2,3-dimethyl-2-butenate, methyl 3-phenyl-2-propenoate, and the like.

The alpha, beta ethylenically unsaturated carboxylate thioester compounds employed herein have the following formula :




wherein R¹, R², R³, and R⁴ are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl as defined above. Examples of such alpha, beta-ethylenically unsaturated carboxylate thioesters of formula IX are methylmercapto 2-butenate, ethylmercapto 2-hexenoate, isopropylmercapto 2-decenoate, phenylmercapto 2-pentenamide, tertiary butylmercapto 2-propenoate, octadecylmercapto 2-propenoate, dodecylmercapto 2-decenoate, cyclopropylmercapto 2,3-dimethyl-2-butenate, methyl mercapto 3-phenyl-2-propenoate, methylmercapto 2-propenoate, methylmercapto 2-methyl-2-propenoate, and the like.

The alpha, beta ethylenically unsaturated carboxamide compounds employed herein have the following formula :




wherein R¹, R², R³, R⁴ and R⁵ are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl as defined above. Examples of alpha, beta-ethylenically unsaturated carboxamides of formula X are 2-butenamide, 2-hexenamide, 2-decenamide, 3-methyl-2-heptenamide, 3-methyl-2-butenamide, 3-phenyl-2-propenamide, 3-cyclohexyl-2-butenamide, 2-methyl-2-butenamide, 2-propyl-2-propenamide, 2-isopropyl-2-hexenamide, 2,3-dimethyl-2-butenamide, 3-cyclohexyl-2-methyl-2-pentenamide, N-methyl 2-butenamide, N,N-diethyl 2-hexenamide, N-isopropyl 2-decenamide, N-phenyl 2-pentenamide, N-tertiary butyl 2-propenamide, N-octadecyl 2-propenamide, N-N-didodecyl 2-decenamide, N-cyclopropyl 2,3-dimethyl-2-butenamide, N-methyl 3-phenyl-2-propenamide, 2-propenamide, 2-methyl-2-propenamide, 2-ethyl-2-propenamide and the like.

The alpha, beta ethylenically unsaturated thiocarboxylate compounds employed herein have the following formula :




wherein R^1 , R^2 , R^3 , R^4 and R^5 are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl as defined above. Examples of alpha, beta-ethylenically unsaturated thiocarboxylate compounds of formula XI are 2-butenthioic acid, 2-hexenthioic acid, 2-decenthioic acid, 3-methyl-2-heptenthioic acid, 3-methyl-2-butenthioic acid, 3-phenyl-2-propenthioic acid, 3-cyclohexyl-2-butenthioic acid, 2-methyl-2-butenthioic acid, 2-propyl-2-propenthioic acid, 2-isopropyl-2-hexenthioic acid, 2,3-dimethyl-2-butenthioic acid, 3-cyclohexyl-2-methyl-2-penthenthioic acid, 2-propenthioic acid, methyl 2-propenthioate, methyl 2-methyl 2-propenthioate, methyl 2-butenthioate, ethyl 2-hexenthioate, isopropyl 2-decenthioate, phenyl 2-penthenthioate, tertiary butyl 2-propenthioate, octadecyl 2-propenthioate, dodecyl 2-decenthioate, cyclopropyl 2,3-dimethyl-2-butenthioate, methyl 3-phenyl-2-propenthioate, and the like.

The alpha, beta ethylenically unsaturated dithioic acid and acid ester compounds employed herein have the following formula :



wherein R^1 , R^2 , R^3 , and R^4 are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl as defined above. Examples of alpha, beta-ethylenically unsaturated dithioic acids and acid esters of formula XII are 2-butendithioic acid, 2-hexendithioic acid, 2-decendithioic acid, 3-methyl-2-heptendithioic acid, 3-methyl-2-butendithioic acid, 3-phenyl-2-propendithioic acid, 3-cyclohexyl-2-butendithioic acid, 2-methyl-2-butendithioic acid, 2-propyl-2-propendithioic acid, 2-isopropyl-2-hexendithioic acid, 2,3-dimethyl-2-butendithioic acid, 3-cyclohexyl-2-methyl-2-pentendithioic acid, 2-propendithioic acid, methyl 2-propendithioate, methyl 2-methyl 2-propendithioate, methyl 2-butendithioate, ethyl 2-hexendithioate, isopropyl 2-decendithioate, phenyl 2-pentendithioate, tertiary butyl 2-propendithioate, octadecyl 2-propendithioate, dodecyl 2-decendithioate, cyclopropyl 2,3-dimethyl-2-butendithioate, methyl 3-phenyl-2-propendithioate, and the like.

The alpha, beta ethylenically unsaturated thiocarboxamide compounds employed herein have the following formula :



wherein R^1 , R^2 , R^3 , R^4 and R^5 are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl as defined above. Examples of alpha, beta-ethylenically unsaturated thiocarboxamides of formula XIII are 2-butenthioamide, 2-hexenthioamide, 2-decenthioamide, 3-methyl-2-heptenthioamide, 3-methyl-2-butenthioamide, 3-phenyl-2-propenthioamide, 3-cyclohexyl-2-butenthioamide, 2-methyl-2-butenthioamide, 2-propyl-2-propenthioamide, 2-isopropyl-2-hexenthioamide, 2,3-dimethyl-2-butenthioamide, 3-cyclohexyl-2-methyl-2-penthenthioamide, N-methyl 2-butenthioamide, N,N-diethyl 2-hexenthioamide, N-isopropyl 2-decenthioamide, N-phenyl 2-penthenthioamide, N-tertiary butyl 2-propenthioamide, N-octadecyl 2-propenthioamide, N-N-didodecyl 2-decenthioamide, N-cyclopropyl 2,3-dimethyl-2-butenthioamide, N-methyl 3-phenyl-2-propenthioamide, 2-propenthioamide, 2-methyl-2-propenthioamide, 2-ethyl-2-propenthioamide and the like.

Preferred compounds for reaction with the polyamines in accordance with this invention are lower alkyl esters of acrylic and (lower alkyl) substituted acrylic acid. Illustrative of such preferred compounds are compounds of the formula :



where R³ is hydrogen or a C₁ to C₄ alkyl group, such as methyl, and R⁴ is hydrogen or a C₁ to C₄ alkyl group, capable of being removed so as to form an amido group, for example, methyl, ethyl, propyl, isopropyl, butyl, sec-butyl, tert-butyl, aryl, hexyl, etc. In the preferred embodiments these compounds are acrylic and methacrylic esters such as methyl, ethyl, propyl or butyl acrylate, or methacrylate. When the selected alpha, beta-unsaturated compound comprises a compound of formula I wherein X is oxygen, the resulting reaction product with the polyamine contains at least one amido linkage (—C(O)N<) and such materials are herein termed "amido-amines." Similarly, when the selected alpha, beta unsaturated compound of formula I comprises a compound wherein X is sulfur, the resulting reaction product with the polyamine contains thioamide linkage (—C(S)N<) and these materials are herein termed "thioamido-amines." For convenience, the following discussion is directed to the preparation and use of amido-amines, although it will be understood that such discussion is also applicable to the thioamido-amines.


The type of amido-amine formed varies with reaction conditions. For example, a more linear amido-amine is formed where substantially equimolar amounts of the unsaturated carboxylate and polyamine are reacted. The presence of excesses of the ethylenically unsaturated reactant of formula I tends to yield an amido-amine which is more cross-linked than that obtained where substantially equimolar amounts of reactants are employed. Where for economic or other reasons a cross-linked amido-amine using excess amine is desired, generally a molar excess of the ethylenically unsaturated reactant of about at least 10%, such as 10-300%, or greater, for example, 25-200%, is employed. For more efficient cross-linking an excess of carboxylated material should preferably be used since a cleaner reaction ensues. For example, a molar excess of about 10-100% or greater such as 10-50%, but preferably an excess of 30-50%, of the carboxylated material. Larger excess can be employed if desired.

In summary, without considering other factors, equimolar amounts of reactants tend to produce a more linear amido-amine whereas excess of the formula I reactant tends to yield a more cross-linked amido-amine. It should be noted that the higher the polyamine (i.e., in greater the number of amino groups on the molecule) the greater the statistical probability of cross-linking since, for example, a tetraalkylenepentamine, such as tetraethylene pentamine



has more labile hydrogens than ethylene diamine.

These amido-amine adducts so formed are characterized by both amido and amino groups. In their simplest embodiments they may be represented by units of the following idealized formula :



wherein the R's, which may be the same or different, are hydrogen or a substituted group, such as a hydrocarbon group, for example, alkyl, alkenyl, aryl, etc., and A is a moiety of the polyamine which, for example, may be aryl, cycloalkyl, alkyl, etc., and n is an integer such as 1-10 or greater.

The above simplified formula represents a linear amido-amine polymer, which preferably has 1 to 3 amido groups per molecule. However, cross-linked polymers may also be formed by employing certain conditions since the polymer has labile hydrogens which can further react with either the unsaturated moiety by adding across the double bond or by amidifying with a carboxylate group.

Preferably, however, the amido-amines of this invention are not cross-linked to any substantial degree, and

more preferably are substantially linear.

Preferably, the polyamine reactant contains at least one primary amine (and more preferably from 2 to 4 primary amines) group per molecule, and the polyamine and the unsaturated reactant of formula I are contacted in an amount of from about 1 to 10, more preferably from about 2 to 6, and most preferably from about 3 to 5, equivalents of primary amine in the polyamine reactant per mole of the unsaturated reactant of formula I.


The reaction between the selected polyamine and acrylate-type compound is carried out at any suitable temperature. Temperatures up to the decomposition points of reactants and products can be employed. In practice, one generally carries out the reaction by heating the reactants below 100°C, such as 80-90°C, for a suitable period of time, such as a few hours. Where an acrylic-type ester is employed, the progress of the reaction can be judged by the removal of the alcohol in forming the amide. During the early part of the reaction alcohol is removed quite readily below 100°C in the case of low boiling alcohols such as methanol or ethanol. As the reaction slows, the temperature is raised to push the polymerization to completion and the temperature may be raised to 150°C toward the end of the reaction. Removal of alcohol is a convenient method of judging the progress and completion of the reaction which is generally continued until no more alcohol is evolved. Based on removal of alcohol, the yields are generally stoichiometric. In more difficult reactions, yield of at least 95% are generally obtained.

Similarly, it will be understood that the reaction of an ethylenically unsaturated carboxylate thioester of formula IX liberates the corresponding HSR⁴ compound (e.g., H₂S when R⁴ is hydrogen) as a by-product, and the reaction of an ethylenically unsaturated carboxamide of formula X liberates the corresponding HNR⁴(R⁵) compound (e.g., ammonia when R⁴ and R⁵ are each hydrogen) as by-product.

The reaction time involved can vary widely depending on a wide variety of factors. For example, there is a relationship between time and temperature. In general, lower temperature demands longer times. Usually, reaction times of from about 2 to 30 hours, such as 5 to 25 hours, and preferably 3 to 10 hours will be employed.

Although one can employ a solvent, the reaction can be run without the use of any solvent. In fact, where a high degree of cross-linking is desired, it is preferably to avoid the use of a solvent and most particularly to avoid a polar solvent such as water. However, taking into consideration the effect of solvent on the reaction, where desired, any suitable solvent can be employed, whether organic or inorganic, polar or non-polar.

As an example of the amido-amine adducts, the reaction of tetraethylene pentaamine (TEPA) with methyl methacrylate can be illustrated as follows :

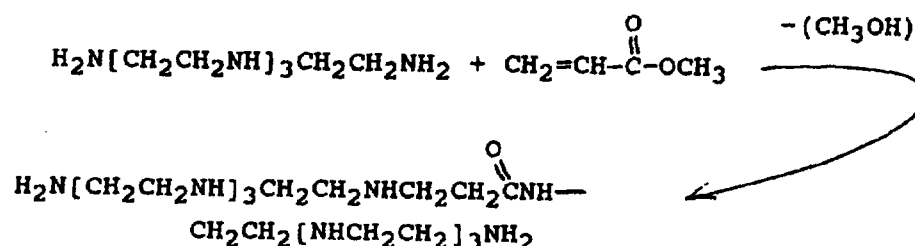


AMINE NEUTRALIZATION OF THE HYDROCARBYL DICARBOXYLIC ACID MATERIAL

In order to form the poly (C5-C9 lactone) adduct dispersants of the present invention, the hydrocarbyl dicarboxylic material must be neutralized with the selected amido-amine material. This will result in the formation of an imide or amide linkage, or a mixture of imide and amide linkages, in the hydrocarbyl dicarboxylic material and will add a lactone-reactive amino group thereto. The lactone-reactive amino group will initiate the subsequent lactone polymerization to provide the novel dispersants of this invention.

The amido-amine is readily reacted with the selected dicarboxylic acid material, e.g. alkenyl succinic anhydride, by heating an oil solution containing 5 to 95 wt. % of the dicarboxylic acid material to about 100 to 250°C., preferably 125 to 175°C., generally for 1 to 10, e.g. 2 to 6 hours until the desired amount of water is removed. The heating is preferably carried out to favour formation of imides or mixtures of imides and amides, rather than amides and salts. Generally from 0.5 to 5 and typically from 1 to 5 (e.g., 0.75 to 3), preferably from about 1.5 to 2.5 moles of dicarboxylic acid moiety content (e.g., grafted maleic anhydride content) is used per equivalent of amido-amine reactant, e.g., amine.

An example of the reaction of an amido-amine reactant with a long chain dicarboxylic acid producing reactant is the reaction of polyisobutylene succinic anhydride (PIBSA) with a poly amido-amine having two terminal —NH₂ groups, which can be illustrated as follows :

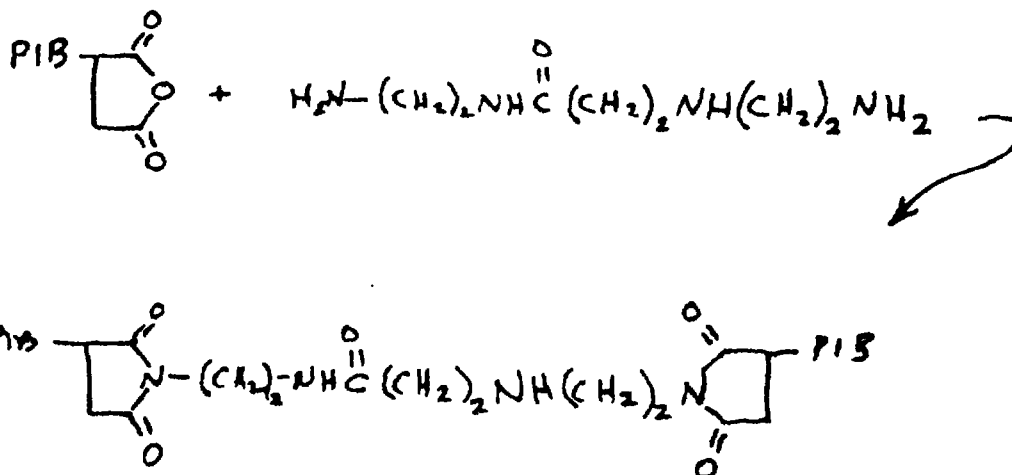

20 It will be understood that the amido-amine reactant B can be employed alone or in admixture with any of the above described amines, such as the polyalkylene polyamines, useful in preparing the amido-amine reactant.

Preferably, the long chain substituted dicarboxylic acid producing material and amido-amine will be contacted for a time and under conditions sufficient to react substantially all of the primary nitrogens in the amido-amine reactant. The progress of this reaction can be followed by infra-red analysis.

25 The amido-amine dicarboxylic acid material reaction can be conducted in a polar or non-polar solvent (e.g., xylene, toluene, benzene and the like), and is preferably conducted in the presence of a mineral or synthetic lubricating oil.

30 LACTONE POLYMER CAPPING OF THE AMINE NEUTRALIZED HYDROCARBYL SUBSTITUTED DICARBOXYLIC MATERIAL


In an aspect of invention, the novel poly (C5-C9 lactone) adducts are prepared by polymerizing the lactone using at least one residual amine functionality on the neutralized hydrocarbyl substituted dicarboxylic acid material as the ring opening and polymerization initiator.

35 Useful lactone compounds for this process include polymerizable lactones having at least five carbon atoms in the lactone ring, e.g. 5 to 9 carbon atoms. The lactones may be substituted or unsubstituted and the substituents, if any, may comprise, for example, C1 to C25 straight or branched chain alkyl ; aryl, aralkyl, or cycloalkyl having 6 to 60 total carbon atoms ; C1 to C12 alkoxy or other groups which would not interfere with the ring opening reaction and adduct formation. The preferred lactones have no more than two substituent groups, and the more preferred lactones are unsubstituted.

40 Non-limiting examples of the useful lactone include delta-valerolactone, methyl-deltavalerolactone, E-caprolactone, methyl-E-caprolactone, dimethyl-E-caprolactone, methoxy-E-caprolactone, cyclohexyl-E-caprolactone, methylbenzyl-Ecaprolactone, caprylactone, methyl-caprylactone, and the like, with E-caprolactone being particularly preferred.


45 The ring opening polymerization of the lactone by reaction with the neutralized hydrocarbyl substituted dicarboxylic acid material may be carried out, with or without a catalyst, simply by heating a mixture of the lactone and dicarboxylic acid material in a reaction vessel in the absence of a solvent at a temperature of from about 30°C. to about 200°C., more preferably at a temperature of about 75°C. to about 180°C., and most preferably about 90° to about 160°C., for a sufficient period of time to effect polymerization. Optionally, a solvent for the monomer and/or polymer can be employed to control viscosity and/or reaction rates.

50 In one preferred embodiment of the invention, the C5-C9 lactone is reacted with a polyisobutenyl succinimide which has been prepared by neutralizing polyisobutenyl succinic acid with an aliphatic diamine as outlined above. This reaction can be depicted generally by the following equation when the succinimide has available primary amino functionality :

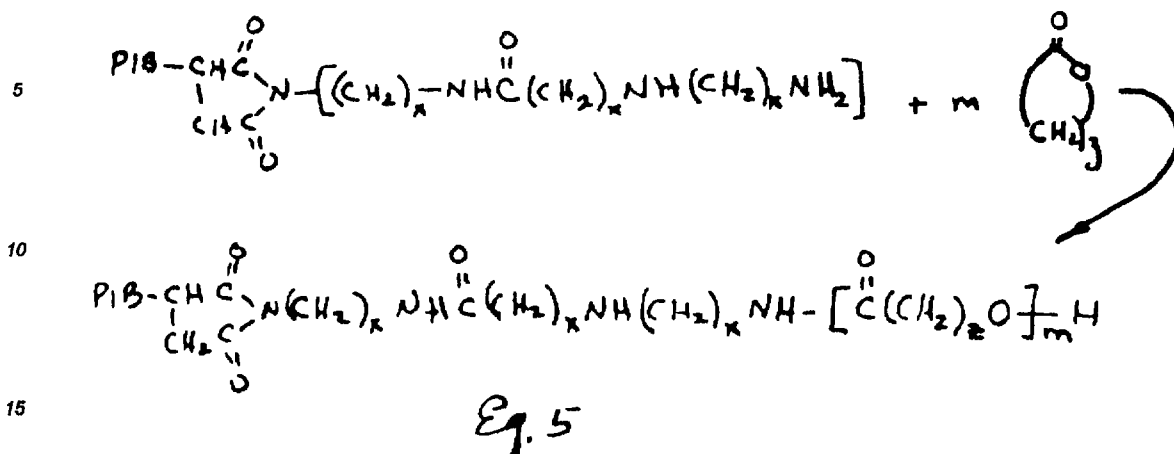

where x is a number from 1 to 4, m has an average value of from about 0.2 to about 100, preferably from 1 to about 20, z is from 4 to 8, PIB represents polyisobutylene having a number average molecular weight of from about 700 to about 5,000, preferably about 900 to about 3,000, and the ratio-(functionality) of succinic acid moieties is from about 0.8 to about 2.0 per equivalent weight of polyisobutylene, and more preferably from about 1.00 to about 1.5 per equivalent weight of polyisobutylene.

When the succinimide has available secondary amino functionality, the reaction can be depicted generally by the following equation :

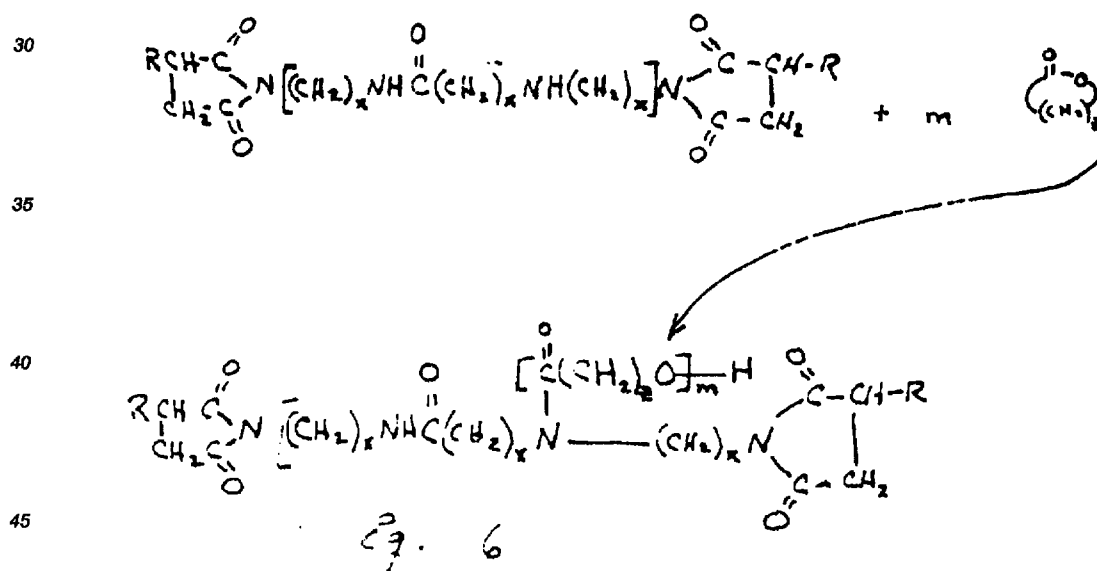

where x is a number from 1 to 4, z is a number from 4 to 8, and m has an average value of from 0,2 to about 100, preferably from 1 to about 20.

Catalysts useful in the promotion of the above-identified reaction are selected from the group consisting of stannous octanoate, stannous hexanoate, stannous oxalate, tetrabutyl titanate, a variety of metal organic based catalysts, acid catalysts and amine catalysts, as described on page 266, and forward in a book chapter authored by R. D. Lundberg and E. F. Cox entitled, "Kinetics and Mechanisms of Polymerization : Ring Opening Polymerization" ; edited by Frisch and Reegen, published by Marcel Dekker in 1969, wherein stannous

octanoate is an especially preferred catalyst. The catalyst may be added to the reaction mixture at any effective concentration level. However, the catalyst generally is added at a concentration level of about 50 to about 10,000 parts of catalyst per one million parts by weight of total reaction mixture.

When initiating the polymerization of the lactone monomer under the conditions described herein, the lactone will react selectively first with primary amino groups present in the initiator molecule and form a polymer adduct containing the polylactone ester group and a terminal hydroxyl group. In the absence of a catalyst, any excess lactone monomer will either react with a secondary amino group present in the initiator molecule or with the hydroxyl group formed via the reaction of the lactone with the primary amino groups. In the presence of a catalyst, such as stannous octanoate, it is believed that the lactone preferably will react somewhat more readily with the terminal hydroxyl group than with a secondary amino group thus producing a polylactone ester adduct. If the stoichiometry of the initiator is such that very few primary amino groups are available, secondary amino groups will be converted to polylactone adducts. This preference towards reaction with the primary amino groups results in an added benefit in those specific applications where the presence of primary amines is considered to be deleterious to performance (such as in diesel dispersancy). In those cases, the present invention provides a means for replacing the deleterious amine group with an amide function and a desirable hydroxyl group.

In the reactions shown above in Equation 6, the values of m and n or the average degree of polymerization (DP) (wherein $DP = (m + n)/2$) of the lactone monomers may vary depending upon the intended application. At DP's of much greater than about 10, e.g., greater than about 50, the polylactone adducts can exhibit crystallinity; a characteristic which is undesirable in an oil soluble dispersant due to the consequent high viscosity or even solid, oil products which can be obtained. However, at lower DP's, oil soluble adducts possessing low viscosity and desirable sludge and varnish inhibition characteristics are obtained.

Accordingly, regardless of the identity of the lactone and neutralized hydrocarbyl substituted dicarboxylic acid material, the average degree of polymerization (DP) should be between about 1 and about 100, more preferably between about 1 and about 50, and most preferably between about 0.2 and about 20.

Further aspects of the present invention reside in the formation of metal complexes and other post-treatment derivatives, e.g., borated derivatives, of the novel additives prepared in accordance with this invention. Suitable metal complexes may be formed in accordance with known techniques of employing a reactive metal ion species during or after the formation of the present C5-C9 lactone derived dispersant materials. Complex forming metal reactants include the nitrates, thiocyanates, halides, carboxylates, phosphates, thio-phosphates, sulfates, and borates of transition metals such as iron, cobalt, nickel, copper, chromium, manganese, molybdenum, tungsten, ruthenium, palladium, platinum, cadmium, lead, silver, mercury, antimony and the like. Prior art disclosures of these complexing reactions may be found in U.S. Patents 3,306,908 and Re. 26,433.

Post-treatment compositions include those formed by reacting the novel additives of the present invention with one or more post-treating reagents, usually selected from the group consisting of boron oxide, boron oxide hydrate, boron halides, boron esters, boron acids, sulfur, sulfur chlorides, phosphorous sulfides and oxides, carboxylic acid or anhydride acylating agents, epoxides and episulfides and acrylonitriles. The reaction of such posttreating agents with the novel additives of this invention is carried out using procedures known in the art. For example, boration may be accomplished in accordance with the teachings of U.S. Patent 3,254,025 by treating the C5-C9 lactone derived additive compound with a boron oxide, halide, ester or acid. Treatment may be carried out by adding about 1-3 wt.% of the boron compound, preferably boric acid, and heating and stirring the reaction mixture at about 135°C to 165°C for 1 to 5 hours followed by nitrogen stripping and filtration, if desired. Mineral oil or inert organic solvents facilitate the process.

Other dispersants which can be employed in admixture with the novel amido-amine dispersants of this invention include those derived from the aforesaid long chain hydrocarbyl substituted dicarboxylic acid material and the aforesaid amines, such as polyalkylene polyamines, e.g., long chain hydrocarbyl substituted succinimides. Exemplary of such other dispersants are those described in EP-A-208560.

A preferred group of ashless dispersants are those derived from polyisobutylene substituted with succinic anhydride groups and reacted with amido-amine adducts formed by reacting polyethylene amines, e.g., tetraethylene pentamine, pentaethylene hexamine, polyoxyethylene and polyoxypropylene amines, e.g., polyoxypropylene diamine, trimethylolaminomethane and pentaerythritol, and combinations thereof, with an acrylate-type compound of formula (XIV) above. One particularly preferred dispersant combination involves a polyisobutylene substituted with succinic anhydride groups and reacted with an amido-amine adduct which has been formed by the reaction of (1) a polyalkylene polyamine, (2) an acrylate-type reactant selected from the group consisting of lower alkyl alky-acrylates (e.g., methyl, ethyl, iso-propyl, propyl, iso-butyl, n-butyl, tert-butyl, etc., esters of methacrylic acid, acrylic acid, and the like), and (3) a C₅-C₉ lactone material (e.g., delta-valerolactone, methyl-delta-valerolactone, E-caprolactone, methyl-E-caprolactone, dimethyl-E-caprolactone, methoxy-E-caprolactone, cyclohexyl-E-caprolactone, methylbenzyl-E-caprolactone, caprylolactone,

methyl-capryl lactone and the like).

The dispersants of the present invention can be incorporated into a lubricating oil in any convenient way. Thus, these mixtures can be added directly to the oil by dispersing or dissolving the same in the oil at the desired level of concentration of the dispersant. Such blending into the additional lube oil can occur at room temperature or elevated temperatures. Alternatively, the dispersants can be blended with a suitable oil-soluble solvent and base oil to form a concentrate, and then blending the concentrate with a lubricating oil basestock to obtain the final formulation. Such dispersant concentrates will typically contain (on an active ingredient (A.I.) basis) from about 20 to about 60 wt.%, and preferably from about 10 to about 40 wt.%, dispersant additive, and typically from about 30 to 90 wt.%, preferably from about 40 to 60 wt.%, base oil, based on the concentrate weight.

The lubricating oil basestock for the dispersant typically is adapted to perform a selected function by the incorporation of additional additives therein to form lubricating oil compositions (i.e., formulations).

LUBRICATING COMPOSITIONS

The lactone derived additives of the present invention have been found to possess very good dispersant properties as measured herein in a wide variety of environments.

Accordingly, the lactone derived adducts are used by incorporation and dissolution into an oleaginous material such as fuels and lubricating oils.

When the dispersants of this invention are used in normally liquid petroleum fuels such as middle distillates boiling from about 65 to 430°C., including kerosene, diesel fuels, home heating fuel oil, jet fuels, etc., a concentration of the additive in the fuel in the range of typically from about 0.001 to about 0.5, and preferably 0.001 to about 0.1 weight percent, based on the total weight of the composition, will usually be employed.

The lactone derived dispersants find their primary utility in lubricating oil compositions which employ a base oil in which the additives are dissolved or dispersed.

Such base oils may be natural or synthetic although the natural base oils will derive a greater benefit.

Base oils suitable for use in preparing lubricating compositions of the present invention include those conventionally employed as crankcase lubricating oils for spark-ignited and compression ignited internal combustion engines, such as automobile and truck engines, marine and railroad diesel engines, and the like. Advantageous results are also achieved by employing the dispersant additives of the present invention in base oils conventionally employed in and/or adapted for use as power transmitting fluids such as automatic transmission fluids, tractor fluids, universal tractor fluids and hydraulic fluids, heavy duty hydraulic fluids, power steering fluids and the like. Gear lubricants, industrial oils, pump oils and other lubricating oil compositions can also benefit from the incorporation therein of the additives of the present invention.

Thus, the additives of the present invention may be suitably incorporated into synthetic base oils such as alkyl esters of dicarboxylic acids, polyglycols and alcohols, polyalphaolefins, alkyl benzenes, organic esters of phosphoric acids, polysilicone oils, etc.

The lubricating oil base stock conveniently has a viscosity of typically about 2.5 to about 12, and preferably about 2.5 to about 9 mm²/s (cs). at 100°C.

The dispersants of this invention are oil soluble, dissolvable in oil with the aid of a suitable solvent, or are stably dispersible materials. Oil-soluble, dissolvable, or stably dispersible as that terminology is used herein does not necessarily indicate that the materials are soluble, dissolvable, miscible, or capable of being suspended in oil in all proportions. It does mean, however, that the dispersant additives, for instance, are soluble or stably dispersible in oil to an extent sufficient to exert their intended effect in the environment in which the oil is employed. Moreover, the additional incorporation of other additives may also permit incorporation of higher levels of a particular dispersant, if desired.

Lubricating oil compositions, e.g. automatic transmission fluids, heavy duty oils suitable for gasoline and diesel engines, etc., can be prepared with the additives of the invention. Universal type crankcase oils wherein the same lubricating oil compositions can be used for both gasoline and diesel engine can also be prepared. These lubricating oil formulations conventionally contain several different types of additives that will supply the characteristics that are required in the formulations. Among these types of additives are included viscosity index improvers, antioxidants, corrosion inhibitors, detergents, dispersants, pour point depressants, antiwear agents, etc.

In the preparation of lubricating oil formulations it is common practice to introduce the additives in the form of 3 to 80 wt%. preferably 3 to 45 wt% more preferably 10 to 35 wt%, e.g. 20 to 80 wt.% active ingredient concentrates in hydrocarbon oil, e.g. mineral lubricating oil, or other suitable solvent. Usually these concentrates may be diluted with 3 to 100, e.g. 5 to 40 parts by weight of lubricating oil, per part by weight of the additive package, in forming finished lubricants, e.g. crankcase motor oils. The purpose of concentrates, of course, is to make the handling of the various materials less difficult and awkward as well as to facilitate solution or dis-

persion in the final blend. Thus, a dispersant would be usually employed in the form of a 40 to 50 wt.% concentrate, for example, in a lubricating oil fraction.

The ashless dispersants of the present invention will be generally used in admixture with a lube oil base-stock, comprising an oil of lubricating viscosity, including natural and synthetic lubricating oils and mixtures thereof. Thus, the lactone derived additives of the present invention can be employed in a lubricating oil composition which comprises lubricating oil, typically in a major amount, and the dispersant additive, typically in a minor amount, which is effective to impart enhanced dispersancy, relative to the absence of the additive. Additional conventional additives selected to meet the particular requirements of a selected type of lubricating oil composition can be included as desired.

Accordingly, while any effective amount of the dispersant additives can be incorporated into the lubricating oil composition, it is contemplated that such effective amount be sufficient to provide said lube oil composition with an amount of the additive of typically from 0.1 to 20, preferably 0.10 to 15 e.g., 0.1 to 10, and more preferably from 0.1 to 7 wt.%, based on the weight of said composition.

Natural oils include animal oils and vegetable oils (e.g., castor, lard oil) liquid petroleum oils and hydrotreated, solvent-treated or acid-treated mineral lubricating oils of the paraffinic, naphthenic and mixed paraffinic-naphthenic types. Oils of lubricating viscosity derived from coal or shale are also useful base oils.

Alkylene oxide polymers and interpolymers and derivatives thereof where the terminal hydroxyl groups have been modified by esterification, etherification, etc., constitute another class of known synthetic lubricating oils. These are exemplified by polyoxyalkylene polymers prepared by polymerization of ethylene oxide or propylene oxide, the alkyl and aryl ethers of these polyoxyalkylene polymers (e.g., methyl-poly isopropylene glycol ether having an average molecular weight of 1000, diphenyl ether of poly-ethylene glycol having a molecular weight of 500-1000, diethyl ether of polypropylene glycol having a molecular weight of 1000-1500); and mono- and polycarboxylic esters thereof, for example, the acetic acid esters, mixed C₃-C₈ fatty acid esters and C₁₃ Oxo acid diester of tetraethylene glycol.

Another suitable class of synthetic lubricating oils comprises the esters of dicarboxylic acids (e.g., phthalic acid, succinic acid, alkyl succinic acids and alkenyl succinic acids, maleic acid, azelaic acid, suberic acid, sebacic acid, fumaric acid, adipic acid, linoleic acid dimer, malonic acid, alkylmalonic acids, alkenyl malonic acids) with a variety of alcohols (e.g., butyl alcohol, hexyl alcohol, dodecyl alcohol, 2-ethylhexyl alcohol, ethylene glycol, diethylene glycol monoether, propylene glycol). Specific examples of these esters include dibutyl adipate, di(2-ethylhexyl)sebacate, di-n-hexyl fumarate, dioctyl sebacate, diisooctyl azelate, diisodecyl azelate, dioctyl phthalate, didecyl phthalate, dieicosyl sebacate, the 2-ethylhexyl diester of linoleic acid dimer, and the complex ester formed by reacting one mole of sebacic acid with two moles of tetraethylene glycol and two moles of 2-ethylhexanoic acid.

Esters useful as synthetic oils also include those made from C₆ to C₁₂ monocarboxylic acids and polyols and polyol ethers such as neopentyl glycol, trimethylolpropane, pentaerythritol, dipentaerythritol and tripentaerythritol.

Silicon-based oils such as the polyalkyl-, polyaryl-, polyalkoxy-, or polyaryloxysiloxane oils and silicate oils comprise another useful class of synthetic lubricants; they include tetraethyl silicate, tetraisopropyl silicate, tetra-(2-ethylhexyl)silicate, tetra-(4-methyl-2-ethylhexyl)silicate, tetra-(p-tertbutylphenyl)silicate, hexa-(4-methyl-2-pentoxyl)disiloxane, poly(methyl)siloxanes and poly(methylphenyl)siloxanes. Other synthetic lubricating oils include liquid esters of phosphorus-containing acids (e.g., tricresyl phosphate, trioctyl phosphate, diethyl ester of decylphosphonic acid) and polymeric tetrahydrofurans.

Unrefined, refined and rerefined oils can be used in the lubricants of the present invention. Unrefined oils are those obtained directly from a natural or synthetic source without further purification treatment. For example, a shale oil obtained directly from retorting operations, a petroleum oil obtained directly from distillation or ester oil obtained directly from an esterification process and used without further treatment would be an unrefined oil. Refined oils are similar to the unrefined oils except they have been further treated in one or more purification steps to improve one or more properties. Many such purification techniques, such as distillation, solvent extraction, acid or base extraction, filtration and percolation are known to those skilled in the art. Rerefined oils are obtained by processes similar to those used to obtain refined oils applied to refined oils which have been already used in service. Such rerefined oils are also known as reclaimed or reprocessed oils and often are additionally processed by techniques for removal of spent additives and oil breakdown products.

Metal containing rust inhibitors and/or detergents are frequently used with ashless dispersants. Such detergents and rust inhibitors include the metal salts of sulphonic acids, alkyl phenols, sulphurized alkyl phenols, alkyl salicylates, naphthenates, and other oil soluble mono- and di-carboxylic acids. Highly basic, that is over-based metal salts which are frequently used as detergents appear particularly prone to interaction with the ashless dispersant. Usually these metal containing rust inhibitors and detergents are used in lubricating oil in amounts of about 0.01 to 10, e.g. 0.1 to 5 wt.%, based on the weight of the total lubricating composition. Marine

diesel lubricating oils typically employ such metal-containing rust inhibitors and detergents in amounts of up to about 20 wt. %.

Highly basic alkaline earth metal sulfonates are frequently used as detergents. They are usually produced by heating a mixture comprising an oil-soluble sulfonate or alkaryl sulfonic acid, with an excess of alkaline earth metal compound above that required for complete neutralization of any sulfonic acid present and thereafter forming a dispersed carbonate complex by reacting the excess metal with carbon dioxide to provide the desired overbasing. The sulfonic acids are typically obtained by the sulfonation of alkyl substituted aromatic hydrocarbons such as those obtained from the fractionation of petroleum by distillation and/or extraction or by the alkylation of aromatic hydrocarbons as for example those obtained by alkylating benzene, toluene, xylene, naphthalene, diphenyl and the halogen derivatives such as chlorobenzene, chlorotoluene and chloronaphthalene. The alkylation may be carried out in the presence of a catalyst with alkylating agents having from about 3 to more than 30 carbon atoms. For example haloparaffins, olefins obtained by dehydrogenation of paraffins, polyolefins produced from ethylene, propylene, etc. are all suitable. The alkaryl sulfonates usually contain from about 9 to about 70 or more carbon atoms, preferably from about 16 to about 50 carbon atoms per alkyl substituted aromatic moiety.

The alkaline earth metal compounds which may be used in neutralizing these alkaryl sulfonic acids to provide the sulfonates includes the oxides and hydroxides, alkoxides, carbonates, carboxylate sulfide, hydrosulfide, nitrate, borates and ethers of magnesium, calcium, and barium. Examples are calcium oxide, calcium hydroxide, magnesium acetate and magnesium borate. As noted, the alkaline earth metal compound is used in excess of that required to complete neutralization of the alkaryl sulfonic acids. Generally, the amount ranges from about 100 to 220%, although it is preferred to use at least 125%, of the stoichiometric amount of metal required for complete neutralization.

Various other preparations of basic alkaline earth metal alkaryl sulfonates are known, such as U.S. Patents 3,150,088 and 3,150,089 wherein overbasing is accomplished by hydrolysis of an alkoxide-carbonate complex with the alkaryl sulfonate in a hydrocarbon solvent-diluent oil.


A preferred alkaline earth sulfonate additive is magnesium alkyl aromatic sulfonate having a total base number ranging from about 300 to about 400 with the magnesium sulfonate content ranging from about 25 to about 32 wt. %, based upon the total weight of the additive system dispersed in mineral lubricating oil.

Neutral metal sulfonates are frequently used as rust inhibitors. Polyvalent metal alkyl salicylate and naphthenate materials are known additives for lubricating oil compositions to improve their high temperature performance and to counteract deposition of carbonaceous matter on pistons (U.S. Patent 2,744,069). An increase in reserve basicity of the polyvalent metal alkyl salicylates and naphthenates can be realized by utilizing alkaline earth metal, e.g. calcium, salts of mixtures of C_8 - C_{28} alkyl salicylates and phenates (see U.S. Patent 2,744,069) or polyvalent metal salts of alkyl salicyclic acids, said acids obtained from the alkylation of phenols followed by phenation, carboxylation and hydrolysis (U.S. Patent 3,704,315) which could then be converted into highly basic salts by techniques generally known and used for such conversion. The reserve basicity of these metal-containing rust inhibitors is usefully at TBN levels of between about 60 and 150. Included with the useful polyvalent metal salicylate and naphthenate materials are the methylene and sulfur bridged materials which are readily derived from alkyl substituted salicylic or naphthenic acids or mixtures of either or both with alkyl substituted phenols. Basic sulfurized salicylates and a method for their preparation is shown in U.S. Patent 3,595,791. Such materials include alkaline earth metal, particularly magnesium, calcium, strontium and barium salts of aromatic acids having the general formula :




where Ar is an aryl radical of 1 to 6 rings, R^6 is an alkyl group having from about 8 to 50 carbon atoms, preferably 12 to 30 carbon atoms (optimally about 12), X is a sulfur ($-\text{S}-$) or methylene ($-\text{CH}_2-$) bridge, y is a number from 0 to 4 and n is a number from 0 to 4.

Preparation of the overbased methylene bridged salicylate-phenate salt is readily carried out by conventional techniques such as by alkylation of a phenol followed by phenation, carboxylation, hydrolysis, methylene bridging a coupling agent such as an alkylene dihalide followed by salt formation concurrent with carbonation. An overbased calcium salt of a methylene bridged phenol-salicylic acid of the general formula (XVI) :

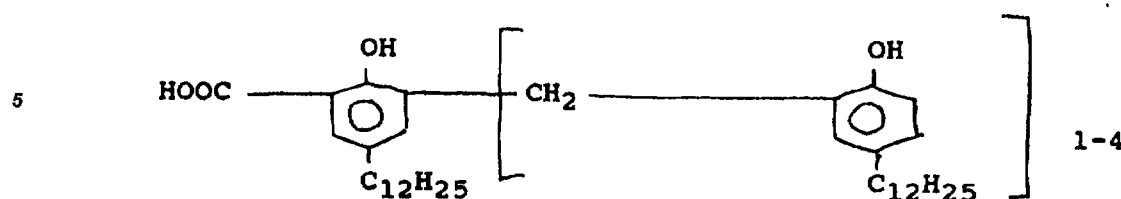

with a TBN of 60 to 150 is highly useful in this invention.

The sulfurized metal phenates can be considered the "metal salt of a phenol sulfide" which thus refers to a metal salt whether neutral or basic, of a compound typified by the general formula (XVII) :

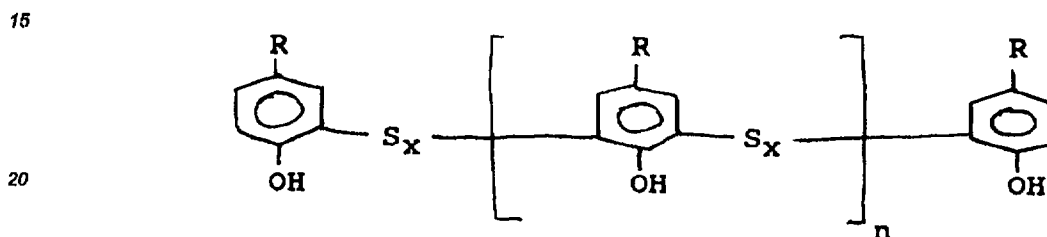

where $x = 1$ or 2 , $n = 0, 1$ or 2 ; or a polymeric form of such a compound, where R is an alkyl radical, n and x are each integers from 1 to 4, and the average number of carbon atoms in all of the R groups is at least about 9 in order to ensure adequate solubility in oil. The individual R groups may each contain from 5 to 40, preferably 8 to 20, carbon atoms. The metal salt is prepared by reacting an alkyl phenol sulfide with a sufficient quantity of metal containing material to impart the desired alkalinity to the sulfurized metal phenate.

Regardless of the manner in which they are prepared, the sulfurized alkyl phenols which are useful generally contain from about 2 to about 14% by weight, preferably about 4 to about 12 wt.% sulfur based on the weight of sulfurized alkyl phenol.

The sulfurized alkyl phenol may be converted by reaction with a metal containing material including oxides, hydroxides and complexes in an amount sufficient to neutralize said phenol and, if desired, to overbase the product to a desired alkalinity by procedures well known in the art. Preferred is a process of neutralization utilizing a solution of metal in a glycol ether.

The neutral or normal sulfurized metal phenates are those in which the ratio of metal to phenol nucleus is about 1 : 2. The "overbased" or "basic" sulfurized metal phenates are sulfurized metal phenates wherein the ratio of metal to phenol is greater than that of stoichiometric, e.g. basic sulfurized metal dodecyl phenate has a metal content up to and greater than 100% in excess of the metal present in the corresponding normal sulfurized metal phenates wherein the excess metal is produced in oil-soluble or dispersible form (as by reaction with CO_2).

Magnesium and calcium containing additives although beneficial in other respects can increase the tendency of the lubricating oil to oxidize. This is especially true of the highly basic sulphonates.

According to a preferred embodiment the invention therefore provides a crankcase lubricating composition also containing from 2 to 8000 parts per million of calcium or magnesium.

The magnesium and/or calcium is generally present as basic or neutral detergents such as the sulphonates and phenates, our preferred additives are the neutral or basic magnesium or calcium sulphonates. Preferably the oils contain from 500 to 5000 parts per million of calcium or magnesium. Basic magnesium and calcium sulphonates are preferred.

As indicated earlier, a particular advantage of the novel dispersants of the present invention is use with V.I improvers to form multi-grade automobile engine lubricating oils. Viscosity modifiers impart high and low temperature operability to the lubricating oil and permit it to remain relatively viscous at elevated temperatures and also exhibit acceptable viscosity or fluidity at low temperatures. Viscosity modifiers are generally high molecular weight hydrocarbon polymers including polyesters. The viscosity modifiers may also be derivatized to include other properties or functions, such as the addition of dispersancy properties. These oil soluble viscosity modifying polymers will generally have number average molecular weights of from 10^3 to 10^6 , preferably 10^4 to 10^5 , e.g., 20,000 to 250,000, as determined by gel permeation chromatography or osmometry.

Examples of suitable hydrocarbon polymers include homopolymers and copolymers of two or more mono-

mers of C_2 to C_{30} , e.g. C_2 to C_8 olefins, including both alpha olefins and internal olefins, which may be straight or branched, aliphatic, aromatic, alkyl-aromatic, cycloaliphatic, etc. Frequently they will be of ethylene with C_3 to C_{30} olefins, particularly preferred being the copolymers of ethylene and propylene. Other polymers can be used such as polyisobutylenes, homopolymers and copolymers of C_8 and higher alpha olefins, atactic polypropylene, hydrogenated polymers and copolymers and terpolymers of styrene, e.g. with isoprene and/or butadiene and hydrogenated derivatives thereof. The polymer may be degraded in molecular weight, for example by mastication, extrusion, oxidation or thermal degradation, and it may be oxidized and contain oxygen. Also included are derivatized polymers such as post-grafted interpolymers of ethylene-propylene with an active monomer such as maleic anhydride which may be further reacted with an alcohol, or amine, e.g. an alkylene polyamine or hydroxy amine, e.g. see U.S. Patent Nos. 4,089,794 ; 4,160,739 ; 4,137,185 ; or copolymers of ethylene and propylene reacted or grafted with nitrogen compounds such as shown in U.S. Patent Nos. 4,068,056 ; 4,068,058 ; 4,146,489 and 4,149,984.

The preferred hydrocarbon polymers are ethylene copolymers containing from 15 to 90 wt.% ethylene, preferably 30 to 80 wt.% of ethylene and 10 to 85 wt.%, preferably 20 to 70 wt.% of one or more C_3 to C_{28} , preferably C_3 to C_{18} , more preferably C_3 to C_8 , alpha-olefins. While not essential, such copolymers preferably have a degree of crystallinity of less than 25 wt.%, as determined by X-ray and differential scanning calorimetry. Copolymers of ethylene and propylene are most preferred. Other alpha-olefins suitable in place of propylene to form the copolymer, or to be used in combination with ethylene and propylene, to form a terpolymer, tetrapolymer, etc., include 1-butene, 1-pentene, 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, etc. ; also branched chain alpha-olefins, such as 4-methyl-1-pentene, 4-methyl-1-hexene, 5-methylpentene-1, 4,4-dimethyl-1-pentene, and 6-methylheptene-1, etc., and mixtures thereof.

Terpolymers, tetrapolymers, etc., of ethylene, said C_{3-28} alpha-olefin, and a non-conjugated diolefin or mixtures of such diolefins may also be used. The amount of the non-conjugated diolefin generally ranges from about 0.5 to 20 mole percent, preferably from about 1 to about 7 mole percent, based on the total amount of ethylene and alpha-olefin present.

The polyester V.I. Improvers are generally polymers of esters of ethylenically unsaturated C_3 to C_8 mono- and dicarboxylic acids such as methacrylic and acrylic acids, maleic acid, maleic anhydride, fumaric acid, etc.

Examples of unsaturated esters that may be used include those of aliphatic saturated mono alcohols of at least 1 carbon atom and preferably of from 12 to 20 carbon atoms, such as decyl acrylate, lauryl acrylate, stearyl acrylate, eicosanyl acrylate, docosanyl acrylate, decyl methacrylate, diamyl fumarate, lauryl methacrylate, cetyl methacrylate, stearyl methacrylate, and the like and mixtures thereof.

Other esters include the vinyl alcohol esters of C_2 to C_{22} fatty or mono carboxylic acids, preferably saturated such as vinyl acetate, vinyl laurate, vinyl palmitate, vinyl stearate, vinyl oleate, and the like and mixtures thereof. Copolymers of vinyl alcohol esters with unsaturated acid esters such as the copolymer of vinyl acetate with dialkyl fumarates, can also be used.

The esters may be copolymerized with still other unsaturated monomers such as olefins, e.g. 0.2 to 5 moles of C_2 - C_{20} aliphatic or aromatic olefin per mole of unsaturated ester, or per mole of unsaturated acid or anhydride followed by esterification. For example, copolymers of styrene with maleic anhydride esterified with alcohols and amines are known, e.g., see U.S. Patent 3,702,300.

Such ester polymers may be grafted with, or the ester copolymerized with, polymerizable unsaturated nitrogen-containing monomers to impart dispersancy to the V.I. improvers. Examples of suitable unsaturated nitrogen-containing monomers include those containing 4 to 20 carbon atoms such as amino substituted olefins as p-(beta-diethylaminoethyl)styrene ; basic nitrogen-containing heterocycles carrying a polymerizable ethylenically unsaturated substituent, e.g. the vinyl pyridines and the vinyl alkyl pyridines such as 2-vinyl-5-ethyl pyridine, 2-methyl-5-vinyl pyridine, 2-vinyl-pyridine, 4-vinyl-pyridine, 3-vinyl-pyridine, 3-methyl-5-vinyl-pyridine, 4-methyl-2-vinyl-pyridine, 4-ethyl-2-vinyl-pyridine and 2-butyl-1-5-vinyl-pyridine and the like.

N-vinyl lactams are also suitable, e.g. N-vinyl pyrrolidones or N-vinyl piperidones.


The vinyl pyrrolidones are preferred and are exemplified by N-vinyl pyrrolidone, N-(1-methylvinyl) pyrrolidone, N-vinyl-5-methyl pyrrolidone, N-vinyl-3, 3-dimethylpyrrolidone, N-vinyl-5-ethyl pyrrolidone, etc.

Dihydrocarbyl dithiophosphate metal salts are frequently used as anti-wear agents and also provide anti-oxidant activity. The zinc salts are most commonly used in lubricating oil in amounts of 0.1 to 10, preferably 0.2 to 2 wt.%, based upon the total weight of the lubricating oil composition. They may be prepared in accordance with known techniques by first forming a dithiophosphoric acid, usually by reaction of an alcohol or a phenol with P_2S_5 and then neutralizing the dithiophosphoric acid with a suitable zinc compound.

Mixtures of alcohols may be used including mixtures of primary and secondary alcohols, secondary generally for imparting improved anti-wear properties, with primary giving improved thermal stability properties. Mixtures of the two are particularly useful. In general, any basic or neutral zinc compound could be used but the oxides, hydroxides and carbonates are most generally employed. Commercial additives frequently contain

an excess of zinc due to use of an excess of the basic zinc compound in the neutralization reaction.

The zinc dihydrocarbyl dithiophosphates useful in the present invention are oil soluble salts of dihydrocarbyl esters of dithiophosphoric acids and may be represented by the following formula :



wherein R and R' may be the same or different hydrocarbyl radicals containing from 1 to 18, preferably 2 to 12 carbon atoms and including radicals such as alkyl, alkenyl, aryl, aralkyl, alkaryl and cycloaliphatic radicals. Particularly preferred as R and R' groups are alkyl groups of 2 to 8 carbon atoms. Thus, the radicals may, for example, be ethyl, n-propyl, i-propyl, n-butyl, i-butyl, sec-butyl, amyl, n-hexyl, i-hexyl, n-octyl, decyl, dodecyl, octadecyl, 2-ethylhexyl, phenyl, butylphenyl, cyclohexyl, methylcyclopentyl, propenyl, butenyl etc. In order to obtain oil solubility, the total number of carbon atoms i.e. R and R' in formula XVIII) in the dithiophosphoric acid will generally be about 5 or greater.

The antioxidants useful in this invention include oil soluble copper compounds. The copper may be blended into the oil as any suitable oil soluble copper compound. By oil soluble we mean the compound is oil soluble under normal blending conditions in the oil or additive package. The copper compound may be in the cuprous or cupric form. The copper may be in the form of the copper dihydrocarbyl thio- or dithio-phosphates wherein copper may be substituted for zinc in the compounds and reactions described above although one mole of cuprous or cupric oxide may be reacted with one or two moles of the dithiophosphoric acid, respectively. Alternatively the copper may be added as the copper salt of a synthetic or natural carboxylic acid. Examples include C₁₀ to C₁₈ fatty acids such as stearic or palmitic, but unsaturated acids such as oleic or branched carboxylic acids such as naphthenic acids of molecular weight from 200 to 500 or synthetic carboxylic acids are preferred because of the improved handling and solubility properties of the resulting copper carboxylates. Also useful are oil soluble copper dithiocarbamates of the general formula (RR'NCSS)_nCu, where n is 1 or 2 and R and R' are the same or different hydrocarbyl radicals containing from 1 to 18 and preferably 2 to 12 carbon atoms and including radicals such as alkyl, alkenyl, aryl, aralkyl, alkaryl and cycloaliphatic radicals. Particularly preferred as R and R' groups are alkyl groups of 2 to 8 carbon atoms. Thus, the radicals may, for example, be ethyl, n-propyl, i-propyl, n-butyl, i-butyl, sec-butyl, amyl, n-hexyl, i-hexyl, n-heptyl, n-octyl, decyl, dodecyl, octadecyl, 2-ethylhexyl, phenyl, butylphenyl, cyclohexyl, methylcyclopentyl, propenyl, butenyl, etc. In order to obtain oil solubility, the total number of carbon atoms (i.e. R and R') will generally be about 5 or greater. Copper sulpho-

nates, phenates, and acetylacetonates may also be used. Exemplary of useful copper compounds are copper (Cu^I and/or Cu^{II}) salts of alkenyl succinic acids or anhydrides. The salts themselves may be basic, neutral or acidic. They may be formed by reacting (a) any of the materials discussed above in the Ashless Dispersant section, which have at least one free carboxylic acid (or anhydride) group with (b) a reactive metal compound. Suitable acid (or anhydride) reactive metal compounds include those such as cupric or cuprous hydroxides, oxides, acetates, borates, and carbonates or basic copper carbonate.

Examples of the metal salts of this invention are Cu salts of polyisobutenyl succinic anhydride (hereinafter referred to as Cu-PIBSA), and Cu salts of polyisobutenyl succinic acid. Preferably, the selected metal employed is its divalent form, e.g., Cu⁺². The preferred substrates are polyalkenyl succinic acids in which the alkenyl group has a molecular weight greater than about 700. The alkenyl group desirably has a M_n from about 900 to 1400, and up to 2500, with a M_n of about 950 being most preferred. Especially preferred, of those listed above in the section on Dispersants, is polyisobutylene succinic acid (PIBSA). These materials may desirably be dissolved in a solvent, such as a mineral oil, and heated in the presence of a water solution (or slurry) of the metal bearing material. Heating may take place between 70° and about 200°C. Temperatures of 110° to 140°C are entirely adequate. It may be necessary, depending upon the salt produced, not to allow the reaction to remain at a temperature above about 140°C for an extended period of time, e.g., longer than 5 hours, or decomposition of the salt may occur.

The copper antioxidants (e.g., Cu-PIBSA, Cu-oleate, or mixtures thereof) will be generally employed in an amount of from about 50-500 ppm by weight of the metal, in the final lubricating or fuel composition.

The copper antioxidants used in this invention are inexpensive and are effective at low concentrations and therefore do not add substantially to the cost of the product. The results obtained are frequently better than those obtained with previously used antioxidants, which are expensive and used in higher concentrations. In

the amounts employed, the copper compounds do not interfere with the performance of other components of the lubricating composition, in many instances, completely satisfactory results are obtained when the copper compound is the sole antioxidant in addition to the ZDDP. The copper compounds can be utilized to replace part or all of the need for supplementary antioxidants. Thus, for particularly severe conditions it may be desirable to include a supplementary, conventional antioxidant. However, the amounts of supplementary antioxidant required are small, far less than the amount required in the absence of the copper compound.

While any effective amount of the copper antioxidant can be incorporated into the lubricating oil composition, it is contemplated that such effective amounts be sufficient to provide said lube oil composition with an amount of the copper antioxidant of from about 5 to 500 (more preferably 10 to 200, still more preferably 10 to 180, and most preferably 20 to 130 (e.g., 90 to 120)) part per million of added copper based on the weight of the lubricating oil composition. Of course, the preferred amount may depend amongst other factors on the quality of the basestock lubricating oil.

Corrosion inhibitors, also known as anti-corrosive agents, reduce the degradation of the metallic parts contacted by the lubricating oil composition. Illustrative of corrosion inhibitors are phosphosulfurized hydrocarbons and the products obtained by reaction of a phosphosulfurized hydrocarbon with an alkaline earth metal oxide or hydroxide, preferably in the presence of an alkylated phenol or of an alkylphenol thioester, and also preferably in the presence of carbon dioxide. Phosphosulfurized hydrocarbons are prepared by reacting a suitable hydrocarbon such as a terpene, a heavy petroleum fraction of a C₂ to C₆ olefin polymer such as polyisobutylene, with from 5 to 30 weight percent of a sulfide of phosphorus for 1/2 to 15 hours, at a temperature in the range of 65.6-315.6°C (150° to 600°F). Neutralization of the phosphosulfurized hydrocarbon may be effected in the manner taught in U.S. Patent No. 1,969,324.

Oxidation inhibitors reduce the tendency of mineral oils to deteriorate in service which deterioration can be evidenced by the products of oxidation such as sludge and varnish-like deposits on the metal surfaces and by viscosity growth. Such oxidation inhibitors include alkaline earth metal salts of alkylphenolthioesters having preferably C₅ to C₁₂ alkyl side chains, calcium nonylphenol sulfide, barium t-octylphenyl sulfide, dioctylphenylamine, phenylalphanaphthylamine, phosphosulfurized or sulfurized hydrocarbons, etc.

Friction modifiers serve to impart the proper friction characteristics to lubricating oil compositions such as automatic transmission fluids.

Representative examples of suitable friction modifiers are found in U.S. Patent No. 3,933,659 which discloses fatty acid esters and amides; U.S. Patent No. 4,176,074 which describes molybdenum complexes of polyisobutenyl succinic anhydride-amino alkanols; U.S. Patent No. 4,105,571 which discloses glycerol esters of dimerized fatty acids; U.S. Patent No. 3,779,928 which discloses alkane phosphonic acid salts; U.S. Patent No. 3,778,375 which discloses reaction products of a phosphonate with an oleamide; U.S. Patent No. 3,852,205 which discloses S-carboxy-alkylene hydrocarbyl succinimide, S-carboxy-alkylene hydrocarbyl succinamic acid and mixtures thereof; U.S. Patent No. 3,879,306 which discloses N-(hydroxyalkyl) alkenyl-succinamic acids or succinimides; U.S. Patent No. 3,932,290 which discloses reaction products of di-(lower alkyl) phosphites and epoxides; and U.S. Patent No. 4,028,258 which discloses the alkylene oxide adduct of phosphosulfurized N-(hydroxyalkyl) alkenyl succinimides. The disclosures of the above references are herein incorporated by reference. The most preferred friction modifiers are glycerol mono and dioleates, and succinate esters, or metal salts thereof, of hydrocarbyl substituted succinic acids or anhydrides and thiois alkanols such as described in U.S. Patent No. 4,344,853.

Pour point depressants lower the temperature at which the fluid will flow or can be poured. Such depressants are well known. Typical of those additives which usefully optimize the low temperature fluidity of the fluid are C₈-C₁₈ dialkylfumarate vinyl acetate copolymers, polymethacrylates, and wax naphthalene.

Foam control can be provided by an antifoamant of the polysiloxane type, e.g. silicone oil and polydimethyl siloxane.

Organic, oil-soluble compounds useful as rust inhibitors in this invention comprise nonionic surfactants such as polyoxyalkylene polyols and esters thereof, and anionic surfactants such as salts of alkyl sulfonic acids. Such anti-rust compounds are known and can be made by conventional means. Nonionic surfactants, useful as anti-rust additives in the oleaginous compositions of this invention, usually owe their surfactant properties to a number of weak stabilizing groups such as ether linkages. Nonionic anti-rust agents containing ether linkages can be made by alkoxyating organic substrates containing active hydrogens with an excess of the lower alkylene oxides (such as ethylene and propylene oxides) until the desired number of alkoxy groups have been placed in the molecule.

The preferred rust inhibitors are polyoxyalkylene polyols and derivatives thereof. This class of materials are commercially available from various sources: Pluronic Polyols from Wyandotte Chemicals Corporation; Polyglycol 112-2, a liquid triol derived from ethylene oxide and propylene oxide available from Dow Chemical Co.; and Tergitol, dodecylphenyl or monophenyl polyethylene glycol ethers, and Ucon, polyalkylene glycols

and derivatives, both available from Union Carbide Corp. These are but a few of the commercial products suitable as rust inhibitors in the improved composition of the present invention.

In addition to the polyols per se, the esters thereof obtained by reacting the polyols with various carboxylic acids are also suitable. Acids useful in preparing these esters are lauric acid, stearic acid, succinic acid, and alkyl- or alkenyl-substituted succinic acids wherein the alkyl- or alkenyl group contains up to about twenty carbon atoms.


The preferred polyols are prepared as block polymers. Thus, a hydroxy-substituted compound, R-(OH)_n (wherein n is 1 to 6, and R is the residue of a mono- or polyhydric alcohol, phenol, naphthol, etc.) is reacted with propylene oxide to form a hydrophobic base. This base is then reacted with ethylene oxide to provide a hydrophylic portion resulting in a molecule having both hydrophobic and hydrophylic portions. The relative sizes of these portions can be adjusted by regulating the ratio of reactants, time of reaction, etc., as is obvious to those skilled in the art. Thus it is within the skill of the art to prepare polyols whose molecules are characterized by hydrophobic and hydrophylic moieties which are present in a ratio rendering rust inhibitors suitable for use in any lubricant composition regardless of differences in the base oils and the presence of other additives.

If more oil-solubility is needed in a given lubricating composition, the hydrophobic portion can be increased and/or the hydrophylic portion decreased. If greater oil-in-water emulsion breaking ability is required, the hydrophylic and/or hydrophobic portions can be adjusted to accomplish this.


Compounds illustrative of R-(OH)_n include alkylene polyols such as the alkylene glycols, alkylene triols, alkylene tetrols, etc., such as ethylene glycol, propylene glycol, glycerol, pentaerythritol, sorbitol, mannitol, and the like. Aromatic hydroxy compounds such as alkylated mono- and polyhydric phenols and naphthols can also be used, e.g., heptylphenol, dodecylphenol, etc.

Other suitable demulsifiers include the esters disclosed in U.S. Patents 3,098,827 and 2,674,619.

The liquid polyols available from Wyandotte Chemical Co. under the name Pluronic Polyols and other similar polyols are particularly well suited as rust inhibitors. These Pluronic Polyols correspond to the formula :



wherein x, y, and z are integers greater than 1 such that the —CH₂CH₂O— groups comprise from about 10% to about 40% by weight of the total molecular weight of the glycol, the average molecule weight of said glycol being from about 1000 to about 5000. These products are prepared by first condensing propylene oxide with propylene glycol to produce the hydrophobic base



This condensation product is then treated with ethylene oxide to add hydrophylic portions to both ends of the molecule. For best results, the ethylene oxide units should comprise from about 10 to about 40% by weight of the molecule. Those products wherein the molecular weight of the polyol is from about 2500 to 4500 and the ethylene oxide units comprise from about 10% to about 15% by weight of the molecule are particularly suitable. The polyols having a molecular weight of about 4000 with about 10% attributable to (CH₂CH₂O) units are particularly good. Also useful are alkoxyated fatty amines, amides, alcohols and the like, including such alkoxyated fatty acid derivatives treated with C₉ to C₁₈ alkyl-substituted phenols (such as the mono- and di-heptyl, octyl, nonyl, decyl, undecyl, dodecyl and tridecyl phenols), as described in U.S. Patent 3,849,501.

These compositions of our invention may also contain other additives such as those previously described, and other metal containing additives, for example, those containing barium and sodium.

The lubricating composition of the present invention may also include copper lead bearing corrosion inhibitors. Typically such compounds are the thiadiazole polysulphides containing from 5 to 50 carbon atoms, their derivatives and polymers thereof. Preferred materials are the derivatives of 1,3,4 thiadiazoles such as those described in U.S. Patents 2,719,125 ; 2,719,126 ; and 3,087,932 ; especially preferred is the compound 2,5 bis (t-octadithio)-1,3,4 thiadiazole commercially available as Amoco 150. Other similar materials also suitable are described in U.S. Patents 3,821,236 ; 3,904,537 ; 4,097,387 ; 4,107,059 ; 4,136,043 ; 4,188,299 ; and

4,193,882.

Other suitable additives are the thio and polythio sulphenamides of thiadiazoles such as those described in GB Patent Specification 1,560,830. When these compounds are included in the lubricating composition, we prefer that they be present in an amount from 0.01 to 10, preferably 0.1 to 5.0 weight percent based on the weight of the composition.

Some of these numerous additives can provide a multiplicity of effects, e.g. a dispersant-oxidation inhibitor. This approach is well known and need not be further elaborated herein.

Compositions when containing these conventional additives are typically blended into the base oil in amounts effective to provide their normal attendant function. Representative effective amounts of such additives (as the respective active ingredients) in the fully formulated oil are illustrated as follows :

<u>Compositions</u>	<u>Wt. % A.I. (Preferred)</u>	<u>Wt. % A.I. (Broad)</u>
Viscosity Modifier	.01-4	0.01-12
Detergents	0.01-3	0.01-20
Corrosion Inhibitor	0.01-1.5	.01-5
Oxidation Inhibitor	0.01-1.5	.01-5
Dispersant	0.1-8	.1-20
Pour Point Depressant	0.01-1.5	.01-5
Anti-Foaming Agents	0.001-0.15	.001-3
Anti-Wear Agents	0.001-1.5	.001-5
Friction Modifiers	0.01-1.5	.01-5
Mineral Oil Base	Balance	Balance

When other additives are employed, it may be desirable, although not necessary, to prepare additive concentrates comprising concentrated solutions or dispersions of the novel dispersants of this invention (in concentrate amounts hereinabove described), together with one or more of said other additives (said concentrate when constituting an additive mixture being referred to herein as an additive-package) whereby several additives can be added simultaneously to the base oil to form the lubricating oil composition. Dissolution of the additive concentrate into the lubricating oil may be facilitated by solvents and by mixing accompanied with mild heating, but this is not essential. The concentrate or additive-package will typically be formulated to contain the additives in proper amounts to provide the desired concentration in the final formulation when the additive-package is combined with a predetermined amount of base lubricant. Thus, the dispersants of the present invention can be added to small amounts of base oil or other compatible solvents along with other desirable additives to form additive-packages containing active ingredients in collective amounts of typically from about 2.5 to about 90%, and preferably from about 15 to about 75%, and most preferably from about 25 to about 60% by weight additives in the appropriate proportions with the remainder being base oil.

The final formulations may employ typically about 10 wt. % of the additive-package with the remainder being base oil.

All of said weight percents expressed herein (unless otherwise indicated) are based on active ingredient (A.I.) content of the additive, and/or upon the total weight of any additive-package, or formulation which will be the sum of the A.I. weight of each additive plus the weight of total oil or diluent.

This invention will be further understood by reference to the following examples, wherein all parts are parts by weight, unless otherwise noted and which include preferred embodiments of the invention. In the Examples, SA : PIB ratios are based upon the total PIB charged to the reactor as starting material, i.e., both the PIB which reacts and the PIB which remains unreacted.

Preparation of Polyisobutylene succinic Anhydride (PIBSA)EXAMPLE 1

5 A polyisobutenyl succinic anhydride having a succinic anhydride (SA) to polyisobutylene mole ratio (i.e., a SA : PIB ratio) of 1.04 is prepared by heating a mixture of 100 parts of polyisobutylene (940 M_n ; M_w/M_n 2.5) with 13 parts of maleic anhydride to a temperature of about 220°C. When the temperature reaches 120°C., the chlorine addition is begun and 10.5 parts of chlorine at a constant rate are added to the hot mixture for about 5.5 hours. The reaction mixture is then heat soaked at 220°C. for about 1.5 hours and then stripped with nitrogen
10 for about one hour. The resulting polyisobutenyl succinic anhydride has an ASTM Saponification Number of 112. The PIBSA product is 90 wt.% active ingredient (A.I.), the remainder being primarily unreacted PIB.

EXAMPLE 2

15 A polyisobutenyl succinic anhydride (PIBSA) having a SA : PIB ratio of 1.24, is prepared by heating a mixture of 100 parts of polyisobutylene (1320 M_n ; M_w/M_n 2.5) with 11 parts of maleic anhydride to a temperature of about 220°C. When the temperature reaches 120°C., the chlorine addition is begun and 10 parts of chlorine at a constant rate are added to the hot mixture for about 5 hours. The reaction mixture is then heat soaked at 220°C. for about 1.5 hours and then stripped with nitrogen for about one hour. The resulting polyisobutenyl
20 succinic anhydride was diluted with S150 mineral oil to obtain a product having an ASTM Saponification Number of 69. The PIBSA product is 59 wt.% active ingredient (A.I.), the remainder being primarily unreacted PIB and mineral oil.

EXAMPLE 3

25 A polyisobutenyl succinic anhydride having a SA : PIB ratio of 1.13 is prepared by heating a mixture of 100 parts of polyisobutylene (2225 M_n ; M_w/M_n 2.5) with 6.14 parts of maleic anhydride to a temperature of about 220°C. When the temperature reaches 120°C., the chlorine addition is begun and 5.07 parts of chlorine at a constant rate are added to the hot mixture for about 5.5 hours. The reaction mixture is then heat soaked at
30 220°C. for about 1.5 hours and then stripped with nitrogen for about one hour. The resulting polyisobutenyl succinic anhydride has an ASTM Saponification Number of 54. The PIBSA product is 80 wt.% active ingredient (A.I.), the remainder being primarily unreacted PIB.

Preparation of Amido Amine — PIBSA Adducts

35 A series of dispersants are prepared by reacting the selected PIBSA, prepared as in Examples 1-3 above, with one of two amido-amines or with a polyalkylene polyamine, tetraethylene pentamine (TEPA). Amido-amine I is prepared by reacting TEPA with methyl acrylate at a 2 : 1 TEPA : methyl acrylate molar ratio, to form a product mixture having 30.1 wt.% total N, 8.2 wt.% primary N, and containing about 50 wt.% unreacted TEPA.
40 Amido-amine II is prepared similarly, except that a 1.5 : 1 TEPA : methyl acrylate molar ratio is employed, to form a product mixture containing 28.3 wt.% total N, 6.1 wt.% primary N, and about 25 wt.% unreacted TEPA.

The amination reactions are carried out as follows :

EXAMPLE 4

45 A mixture of 200 parts by weight of the PIBSA product formed in Example 1 and 188 parts of S150 mineral oil is heated to 150°C. under N_2 . Then 32.3 parts of amido-amine I are added dropwise while stirring and light nitrogen sparging. The mixture is nitrogen stripped at 150°C for 3 hours and then filtered.

EXAMPLE 5

50 A mixture of 200 parts by weight of the PIBSA product formed in Example 1 and 200 parts of S150 mineral oil is heated to 150°C. under N_2 . Then 43.4 parts of amido-amine II are added dropwise while stirring and light nitrogen sparging. The mixture is nitrogen stripped at 150°C for 3 hours and then filtered.

55

EXAMPLE 6

A mixture of 200 parts by weight of the PIBSA product formed in Example 2 and 55 parts of S150 mineral

oil is heated to 150°C. under N₂. Then 21 parts of amido-amine I are added dropwise while stirring and light nitrogen sparging. The mixture is nitrogen stripped at 150°C for 3 hours and then filtered.

EXAMPLE 7

A mixture of 200 parts by weight of the PIBSA product formed in Example 2 and 62 parts of S150 mineral oil is heated to 150°C. under N₂. Then 28.2 parts of amido-amine II are added dropwise while stirring and light nitrogen sparging. The mixture is nitrogen stripped at 150°C for 3 hours and then filtered.

EXAMPLE 8

A mixture of 200 parts by weight of the PIBSA product formed in Example 3 and 126 parts of S150 mineral oil is heated to 150°C. under N₂. Then 15.9 parts of amido-amine I are added dropwise while stirring and light nitrogen sparging. The mixture is nitrogen stripped at 150°C for 3 hours and then filtered.

EXAMPLE 9

A mixture of 200 parts by weight of the PIBSA product formed in Example 3 and 132 parts of S150 mineral oil is heated to 150°C. under N₂. Then 21.3 parts of amido-amine II are added dropwise while stirring and light nitrogen sparging. The mixture is nitrogen stripped at 150°C for 3 hours and then filtered.

EXAMPLES 10-21

In a series of runs, the PIBSA-amido-amine adduct products of Examples 4-9 are contacted with E-caprolactone, in the amounts indicated in the Table below, to form caprolactone modified PIBSA-amido-amine adducts of this invention. In each run, the indicated quantity of E-caprolactone, and 0.25 grams of stannous octanoate. This reaction mixture is heated to 150°C and held at this temperature for 2 hours while stirring under a nitrogen blanket. The resulting polycaprolactone adduct is stripped with a mild stream of nitrogen for one half hour and collected. Infrared analysis of the polycaprolactone adduct indicates complete opening of the lactone ring.

TABLE A.

EXAMPLE	PIBSA-AMIDO-AMINE ADDUCT E-CAPROLACTONE		
	EXAMPLE NO.	MOLE	(mole)
10	4	0.1	0.1
11	4	0.1	0.05
12	5	0.1	0.1
13	5	0.1	0.05
14	6	0.06	0.06
15	6	0.06	0.03
16	7	0.06	0.06
17	7	0.06	0.03
18	8	0.048	0.048
19	8	0.048	0.024
20	9	0.048	0.048
21	9	0.048	0.024

The following lubricating oil compositions are prepared using the lactone modified amido-amine disper-

sants of Examples 10-21. The resulting compositions are then tested for sludge inhibition (via the SIB test) and varnish inhibition (via the VIB test), as described below.

The SIB test has been found, after a large number of evaluations, to be an excellent test for assessing the dispersing power of lubricating oil dispersant additives.

The medium chosen for the SIB test is a used crankcase mineral lubricating oil composition having an original viscosity of about 325 SUS at 38°C that had been used in a taxicab that is driven generally for short trips only, thereby causing a buildup of a high concentration of sludge precursors. The oil that is used contained only a refined base mineral lubricating oil, a viscosity index improver, a pour point depressant and zinc dialkylthiophosphate anti-wear additive. The oil contained no sludge dispersant. A quantity of such used oil is acquired by draining and refilling the taxicab crankcase at 1609-3218 Km (1000-2000 mile) intervals.

The SIB test is conducted in the following manner: the aforesaid used crankcase oil, which is milky brown in color, is freed of sludge by centrifuging for one hour at about 39,000 gravities (gs.). The resulting clear bright red supernatant oil is then decanted from the insoluble sludge particles thereby separated out. However, the supernatant oil still contains oil-soluble sludge precursors which on heating under the conditions employed by this test will tend to form additional oil-insoluble deposits of sludge. The sludge inhibiting properties of the additives being tested are determined by adding to portions of the supernatant used oil, a small amount, such as 0.5, 1 or 2 weight percent, of the particular additive being tested. Ten grams of each blend being tested are placed in a stainless steel centrifuge tube and are heated at 135°C for 16 hours in the presence of air. Following the heating, the tube containing the oil being tested is cooled and then centrifuged for about 30 minutes at room temperature at about 39,000 gs. Any deposits of new sludge that form in this step are separated from the oil by decanting the supernatant oil and then carefully washing the sludge deposits with 25 ml of heptane to remove all remaining oil from the sludge and further centrifuging. The weight of the new solid sludge that has been formed in the test, in milligrams, is determined by drying the residue and weighing it. The results are reported as amount of precipitated sludge in comparison with the precipitated sludge of a blank not containing any additional additive, which blank is normalized to a rating of 10. The less new sludge precipitated in the presence of the additive, the lower the SIB value and the more effective is the additive as a sludge dispersant. In other words, if the additive gives half as much precipitated sludge as the blank, then it would be rated 5.0 since the blank will be normalized to 10.

The VIB test is used to determine varnish inhibition. Here, each test sample consisted of 10 grams of lubricating oil containing a small amount of the additive being tested. The test oil to which the additive is admixed is of the same type as used in the above-described SIB test. Each ten gram sample is heat soaked overnight at about 140°C and thereafter centrifuged to remove the sludge. The supernatant fluid of each sample is subjected to heat cycling from about 150°C to room temperature over a period of 3.5 hours at a frequency of about 2 cycles per minute. During the heating phase, gas which is a mixture of about 0.7 volume percent SO₂, 1.4 volume percent NO and balance air is bubbled through the test samples. During the cooling phase, water vapor is bubbled through the test samples. At the end of the test period, which testing cycle can be repeated as necessary to determine the inhibiting effect of any additive, the wall surfaces of the test flasks in which the samples are contained are visually evaluated as to the varnish inhibition. The amount of varnish imposed on the walls is rated to values of from 1 to 11 with the higher number being the greater amount of varnish, in comparison with a blank with no additive that is rated 11.

10.00 grams of SIB test oil are mixed with 0.05 grams of the products of the Examples as described in Table II and tested in the aforescribed SIB and VIB tests.

The above data thereby obtained show that the lactone modified amido-amine dispersants of this invention have excellent SIB/VIB performance and sludge and varnish inhibiting properties.

EXAMPLE 22

A series of lubricating formulations were prepared in which the dispersant comprises the lactone modified amido-amine dispersant of Examples 10-21. Each lubricating composition contains 6 vol% of the dispersant product mixture formed in Examples 10-21, respectively. Each lubricating composition also contained in equal proportions, mineral lubricating oil, a mixture of overbased Mg sulfonate detergent inhibitor and overbased Ca sulfonate detergent inhibitor, zinc dialkyl dithiophosphate antiwear agent, antioxidant and ethylene propylene viscosity index improver.

EXAMPLE 23.

To a stirred reaction vessel is added 1.5 moles of tetraethylene pentaamine (TEPA) at room temperature, followed by 1 mole of ethyl acrylate, under a N₂ blanket. The resulting exothermic reaction raises the reaction

mass' temperature to about 75°C. Then an infra-red analysis (IR) is made of the reaction mass, which shows the disappearance of the double bond of the ethyl acrylate, but reveals ester groups to be still present. A gas chromatographic analysis of the reaction mass is also then taken, which shows unreacted TEPA still present.

An esterification catalyst, stannous octanoate, is then added (1 drop) to the reaction mass, and the temperature of the reaction vessel is increased to 130 to 135°C with mild N₂ sweeping. The by-product alcohol (ethanol) is removed as a vapor from the reaction vessel with the sweep N₂, and the progress of the reaction is followed by IR until the ester absorption band disappears. The reaction mass is stirred for additional 1 hour at 130 to 135°C to ensure completion of the reaction. A total reaction time of 6 hours is used. The resulting product mixture containing the amido-amine is analyzed and is found to contain 4.8 millequivalents of primary amine per gram of amido-amine and a nitrogen content of 30.1 wt%.

To the reaction mass obtained above is added 1.5 moles of E-caprolactone, to form a polycaprolactone-amido-amine adduct. No additional catalyst is added; rather, the catalyst used in formation of the polycaprolactone-amido-amine adduct is allowed to function as the catalyst for the caprolactone ring opening reaction. This reaction mixture is heated to 150°C and held at this temperature for 2 hours while stirring under a nitrogen blanket. The resulting polycaprolactone adduct is stripped with a mild stream of nitrogen for one half hour and collected. Infrared analysis of the polycaprolactone adduct indicates complete opening of the lactone ring.

To the polycaprolactone-amido-amine product obtained above is added 3 mole of the PIBSA formed as in Example 1 above, using the reaction conditions described in Example 4 to form a product mixture containing the desired PIBSA-polycaprolactone-amido-amine adduct.

EXAMPLE 24.

The procedure of Example 11 was repeated except that the esterification catalyst comprised titanium tetrabutoxide, and similar results were obtained.

It will be understood that the reactants (A), (B) and (C) can be contacted for reaction in any order. While the above illustrative examples exemplify methods wherein the long chain hydrocarbyl substituted dicarboxylic acid producing material is first reacted with the amido-amine and the resulting adduct modified by reaction with the polymerizable lactone (Examples 1-21) and the method wherein the polymerizable lactone and amido-amine are first contacted to form an adduct followed by contacting the lactone-amido-amine adduct with the long chain hydrocarbyl substituted dicarboxylic acid producing material (Examples 22-24), any other order of addition can be used. Alternatively, the reactants can be charged to the reaction zone simultaneously.


The principles, preferred embodiments, and modes of operation of the present invention have been described in the foregoing specification. The invention which is intended to be protected herein, however, is not to be construed as limited to the particular forms disclosed, since these are to be regarded as illustrative rather than restrictive.

Claims

1. A poly (C₅ to C₉) adduct of an aminated hydrocarbyl substituted dicarboxylic acid producing material useful as an oil additive and formed by reacting:

(A) a long chain hydrocarbyl substituted C₄ to C₁₀ monounsaturated dicarboxylic acid producing material formed by reacting an olefin polymer of C₂ to C₁₀ monoolefin having a number average molecular weight of 300 to 10,000 and a C₄ to C₁₀ monounsaturated acid material, said acid producing material having an average of at least 0.8 dicarboxylic acid producing moieties, per molecule of said olefin polymer present in the reaction mixture used to form said acid producing material;

(B) an amido-amine or a thioamido-amine characterized by being a reaction product of at least a polyamine and an alpha, beta-unsaturated compound of the formula:



wherein X is sulphur or oxygen, Y is —OR⁴, —SR⁴, or —NR⁴ (R⁵), and R¹, R², R³, R⁴ and R⁵ are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl; and

(C) a C₅ to C₉ lactone material, said poly (C₅ to C₉) adduct containing the unit —[C(O)(CH₂)_zO]_m wherein m has an average value of from 0.2 to 100 and z is 4 to 8.



mass' temperature to about 75°C. Then an infra-red analysis (IR) is made of the reaction mass, which shows the disappearance of the double bond of the ethyl acrylate, but reveals ester groups to be still present. A gas chromatographic analysis of the reaction mass is also then taken, which shows unreacted TEPA still present.

An esterification catalyst, stannous octanoate, is then added (1 drop) to the reaction mass, and the temperature of the reaction vessel is increased to 130 to 135°C with mild N₂ sweeping. The by-product alcohol (ethanol) is removed as a vapor from the reaction vessel with the sweep N₂, and the progress of the reaction is followed by IR until the ester absorption band disappears. The reaction mass is stirred for additional 1 hour at 130 to 135°C to ensure completion of the reaction. A total reaction time of 6 hours is used. The resulting product mixture containing the amido-amine is analyzed and is found to contain 4.8 milliequivalents of primary amine per gram of amido-amine and a nitrogen content of 30.1 wt%.

To the reaction mass obtained above is added 1.5 moles of E-caprolactone, to form a polycaprolactone-amido-amine adduct. No additional catalyst is added; rather, the catalyst used in formation of the polycaprolactone-amido-amine adduct is allowed to function as the catalyst for the caprolactone ring opening reaction. This reaction mixture is heated to 150°C and held at this temperature for 2 hours while stirring under a nitrogen blanket. The resulting polycaprolactone adduct is stripped with a mild stream of nitrogen for one half hour and collected. Infrared analysis of the polycaprolactone adduct indicates complete opening of the lactone ring.

To the polycaprolactone-amido-amine product obtained above is added 3 mole of the PIBSA formed as in Example 1 above, using the reaction conditions described in Example 4 to form a product mixture containing the desired PIBSA-polycaprolactone-amido-amine adduct.

EXAMPLE 24.

The procedure of Example 11 was repeated except that the esterification catalyst comprised titanium tetrabutoxide, and similar results were obtained.

It will be understood that the reactants (A), (B) and (C) can be contacted for reaction in any order. While the above illustrative examples exemplify methods wherein the long chain hydrocarbyl substituted dicarboxylic acid producing material is first reacted with the amido-amine and the resulting adduct modified by reaction with the polymerizable lactone (Examples 1-21) and the method wherein the polymerizable lactone and amido-amine are first contacted to form an adduct followed by contacting the lactone-amido-amine adduct with the long chain hydrocarbyl substituted dicarboxylic acid producing material (Examples 22-24), any other order of addition can be used. Alternatively, the reactants can be charged to the reaction zone simultaneously.


The principles, preferred embodiments, and modes of operation of the present invention have been described in the foregoing specification. The invention which is intended to be protected herein, however, is not to be construed as limited to the particular forms disclosed, since these are to be regarded as illustrative rather than restrictive.

Claims

1. A poly (C₅ to C₉) adduct of an aminated hydrocarbyl substituted dicarboxylic acid producing material useful as an oil additive and formed by reacting:

(A) a long chain hydrocarbyl substituted C₄ to C₁₀ monounsaturated dicarboxylic acid producing material formed by reacting an olefin polymer of C₂ to C₁₀ monoolefin having a number average molecular weight of 300 to 10,000 and a C₄ to C₁₀ monounsaturated acid material, said acid producing material having an average of at least 0.8 dicarboxylic acid producing moieties, per molecule of said olefin polymer present in the reaction mixture used to form said acid producing material;

(B) an amido-amine or a thioamido-amine characterized by being a reaction product of at least a polyamine and an alpha, beta-unsaturated compound of the formula:



wherein X is sulphur or oxygen, Y is —OR⁴, —SR⁴, or —NR⁴ (R⁵), and R¹, R², R³, R⁴ and R⁵ are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl; and

(C) a C₅ to C₉ lactone material, said poly (C₅ to C₉) adduct containing the unit —[C(O)(CH₂)_zO]_m wherein m has an average value of from 0.2 to 100 and z is 4 to 8.



2. The poly (C₅-C₉) adduct according to claim 1, wherein reactants (A) and (B) are first contacted, followed by addition of reactant (C).

3. The poly (C₅-C₉) adduct according to claim 1, wherein reactants (B) and (C) are first contacted, followed by addition of reactant (A).

4. The poly (C₅-C₉) adduct according to any of claims 1 to 3, wherein said polyamine comprises amines containing from 2 to 60 carbon atoms and from 3 to 12 nitrogen atoms per molecule.

5. The poly (C₅-C₉) adduct according to claim 4, wherein said amine comprises a polyalkylene-polyamine wherein said alkylene groups contain 2 to 40 carbons and said polyalkylene polyamine contains from 5 to 9 nitrogen atoms per molecule.

6. The poly (C₅-C₉) adduct according to claim 1, wherein said hydrocarbyl substituted C₄ to C₁₀ monounsaturated dicarboxylic acid producing material comprises polyisobutylene of from 900 to 5000 number average molecular weight substituted with succinic anhydride moieties, said polyamine comprises polyalkylene-polyamine wherein said alkylene groups contain 2 to 6 carbons and said polyalkylene polyamine contains 5 to 9 nitrogen atoms per molecule, and said alpha, beta-unsaturated compound comprises at least one member selected from methyl acrylate, ethyl acrylate, propyl acrylate, butyl acrylate, methyl methacrylate, ethyl methacrylate, propyl methacrylate, and butyl methacrylate.

7. The poly (C₅-C₉) adduct according to any of claims 1 to 6, wherein said olefin polymer comprises polyisobutylene, and wherein said number average molecular weight of said olefin polymer is from 1300 to 4,000.

8. The poly (C₅-C₉) adduct of any of claims 1 to 7, wherein said monounsaturated acid material comprises maleic anhydride.

9. The poly (C₅-C₉) adduct according to any of claims 1 to 8 wherein 1 to 5 moles of said acid producing material per primary nitrogen equivalent of said amido-amine are present in said reaction mixture.


10. The poly (C₅-C₉) adduct according to claim 9 wherein said amido-amine contains an average of from 1 to 3 amido groups per molecule of said amido-amine.

11. The poly (C₅-C₉) adduct according to any of claims 1 to 10 wherein said C₅ to C₉ lactone material is E-caprolactone.

12. A process for producing a poly (C₅-C₉) adduct useful as an oil additive which comprises :

(a) providing a hydrocarbyl substituted C₄ to C₁₀ monoolefin having a number average molecular weight of 700 to 10,000 and a C₄ to C₁₀ monounsaturated acid material, said acid producing material having an average of at least 0.8 dicarboxylic acid producing moieties, per molecule of said olefin polymer present in the reaction mixture used to form said acid producing material ;

(b) providing an amido-amine compound having at least one primary amino group prepared by reacting at least one polyamine with at least one alpha, beta-unsaturated compound of the formula :



wherein X is sulphur or oxygen, Y is —OR⁴, —SR⁴, or —NR⁴(R⁵), and R¹, R², R³, R⁴ and R⁵ are the same or different and are hydrogen or substituted or unsubstituted hydrocarbyl ;

(c) contacting the said acid producing material with said amido-amine compound under conditions sufficient to effect reaction of at least a portion of the primary amino groups on said amido-amine compound with at least a portion of the acid-producing groups in said acid producing material, to form a first adduct ; and

(d) contacting said first adduct with a C₅ to C₉ lactone material under conditions sufficient to ring open the lactone ring of said lactone material to form said poly (C₅-C₉) adduct containing the unit —[C(O)(CH₂)_zO]_m wherein m has an average value of from 0.2 to 100 and z is 4 to 8.

13. The process according to claim 12, wherein said amine comprises a polyalkylene polyamine wherein said alkylene group contain 2 to 40 carbons and said polyalkylene polyamine contains from 5 to 9 nitrogen atoms per molecule.

14. The process according to claim 13, wherein said hydrocarbyl substituted C₄ to C₁₀ monounsaturated dicarboxylic acid producing material comprises polyisobutylene of from 900 to 5000 number average molecular weight substituted with succinic anhydride moieties, said amine comprises polyalkylene polyamine wherein said alkylene groups contain 2 to 6 carbons and said polyalkylene polyamine contains 5 to 9 nitrogen atoms per molecule, and said acrylate-type compound comprises at least one member selected from the group con-



sisting of methyl acrylate, ethyl acrylate, propyl acrylate, butyl acrylate, methyl methacrylate, ethyl methacrylate, propyl methacrylate, and butyl methacrylate.

15. The process according to any of claims 12 to 14, wherein said olefin polymer comprises polyisobutylene, and wherein said number average molecular weight of said first olefin polymer is from 1300 to 4,000.

16. A concentrate containing from 3 to 45 wt.% of the poly (C₅-C₉) adduct of any of claims 1 to 11.

17. A concentrate as described in claim 16 containing from 10 to 35 wt.% of the poly (C₅-C₉) adduct of claim 4.


18. A lubricating oil composition containing from 0.1 to 20 wt.% of the poly (C₅-C₉) adduct prepared according to any of claims 1 to 11.

Revendications

1. Produit de polyaddition en C₅ à C₉ d'une matière aminée productrice d'acide dicarboxylique à substitution hydrocarbyle, utile comme additif pour huiles et formé par réaction :

(A) d'une matière productrice d'acide dicarboxylique mono-insaturé en C₄ à C₁₀ à substitution hydrocarbyle à chaîne longue formée par réaction d'un polymère oléfinique d'une mono-oléfine en C₂ à C₁₀ ayant une moyenne numérique du poids moléculaire de 300 à 10000 et d'un acide mono-insaturé en C₄ à C₁₀, ladite matière productrice d'acide ayant un nombre moyen de groupements producteurs d'acide dicarboxylique d'au moins 0,8, par molécule dudit polymère oléfinique présente dans le mélange réactionnel utilisé pour former ladite matière productrice d'acide ;

(B) d'une amido-amine ou d'une thioamido-amine caractérisée en ce qu'elle consiste en un produit de réaction d'au moins une polyamine et d'un composé à insaturation alpha, bêta de formule :



dans laquelle X représente le soufre ou l'oxygène, Y représente un groupe —OR⁴, —SR⁴ ou —NR⁴ (R⁵), et R¹, R², R³, R⁴ et R⁵ sont identiques ou différents et représentent l'hydrogène ou des groupes hydrocarbyle substitués ou non substitués ; et

(C) d'une lactone en C₅ à C₉, ledit produit de polyaddition en C₅ à C₉ contenant le motif —[C(O)(CH₂)_zO]_m dans lequel m possède une valeur moyenne de 0,2 à 100 et z possède une valeur de 4 à 8.

2. Produit de polyaddition en C₅ à C₉ suivant la revendication 1, dans lequel les corps réactionnels (A) et (B) sont tout d'abord mis en contact, puis le corps réactionnel (C) est ajouté.

3. Produit de polyaddition en C₅ à C₉ suivant la revendication 1, dans lequel les corps réactionnels (B) et (C) sont tout d'abord mis en contact, puis le corps réactionnel (A) est ajouté.

4. Produit de polyaddition en C₅ à C₉ suivant l'une quelconque des revendications 1 à 3, dans lequel la polyamine consiste en anines contenant 2 à 60 atomes de carbone et 3 à 12 atomes d'azote par molécule.

5. Produit de polyaddition en C₅ à C₉ suivant la revendication 4, dans lequel l'amine consiste en une polyalkylène-polyamine dans laquelle les groupes alkylène contiennent 2 à 40 atomes de carbone et la polyalkylène-polyamine contient 5 à 9 atomes d'azote par molécule.

6. Produit de polyaddition en C₅ à C₉ suivant la revendication 1, dans lequel ladite matière productrice d'acide dicarboxylique mono-insaturé en C₄ à C₁₀ à substitution hydrocarbyle consiste en un polyisobutylène ayant une moyenne numérique du poids moléculaire de 900 à 5000 substitué avec des groupements anhydride succinique, ladite polyamine consiste en une polyalkylène-polyamine dans laquelle lesdits groupes alkylène comprennent 2 à 6 atomes de carbone et ladite polyalkylène-polyamine contient 5 à 9 atomes d'azote par molécule, et ledit composé à insaturation alpha, bêta comprend au moins un élément choisi entre l'acrylate de méthyle, l'acrylate d'éthyle, l'acrylate de propyle, l'acrylate de butyle, le méthacrylate de méthyle, le méthacrylate d'éthyle, le méthacrylate de propyle et le méthacrylate de butyle.

7. Produit de polyaddition en C₅ à C₉ suivant l'une quelconque des revendications 1 à 6, dans lequel le polymère oléfinique consiste en polyisobutylène et la moyenne numérique du poids moléculaire du polymère oléfinique est comprise dans l'intervalle de 1300 à 4000.

8. Produit de polyaddition en C₅ à C₉ suivant l'une quelconque des revendications 1 à 7, dans lequel la matière du type acide mono-insaturé consiste en anhydride maléique.

9. Produit de polyaddition en C₅ à C₉ suivant l'une quelconque des revendications 1 à 8, dans lequel 1 à 5 moles de la matière productrice d'acide par équivalent d'azote primaire de l'amido-amine sont présentes dans



le mélange réactionnel.


10. Produit de polyaddition en C₅ à C₉ suivant la revendication 9, dans lequel l'amido-amine contient un nombre moyen de 1 à 3 groupes amido par molécule de l'amido-amine.

11. Produit de polyaddition en C₅ à C₉ suivant l'une quelconque des revendications 1 à 10, dans lequel la lactone en C₅ à C₉ est l' ϵ -caprolactone.

12. Procédé de production d'un produit de polyaddition en C₅ à C₉ utile comme additif d'huile, qui consiste:

(a) à produire une mono-oléfine en C₄ à C₁₀ à substitution hydrocarbyle ayant une moyenne numérique du poids moléculaire de 700 à 10000 et un acide mono-insaturé en C₄ à C₁₀, ladite matière productrice d'acide comprenant un nombre moyen d'au moins 0,8 groupement producteur d'acide dicarboxylique par molécule dudit polymère oléfinique présente dans le mélange réactionnel utilisé pour former ladite matière productrice d'acide ;

(b) à produire une amido-amine ayant au moins un groupe amino primaire, par réaction d'au moins une polyamine avec au moins un composé à insaturation alpha, bêta de formule :



dans laquelle X représente le soufre ou l'oxygène, Y représente un groupe —OR⁴, —SR⁴ ou —NR⁴ (R⁵), et R¹, R², R³, R⁴ et R⁵ sont identiques ou différents et représentent l'hydrogène ou des groupes hydrocarbyle substitués ou non substitués ;

(c) à mettre en contact ladite matière productrice d'acide avec ladite amido-amine dans des conditions suffisantes pour conduire la réaction d'au moins une partie des groupes amino primaires présents sur l'amido-amine avec au moins une partie des groupes producteurs d'acide dans ladite matière productrice d'acide, pour former un premier produit d'addition ; et

(d) à mettre en contact ledit premier produit d'addition avec une lactone en C₅ à C₉ dans des conditions suffisantes pour l'ouverture du noyau lactone de ladite lactone pour former un produit de polyaddition en C₅ à C₉ contenant le motif —[C(O)(CH₂)_zO]_m dans lequel m possède une valeur moyenne de 0,2 à 100 et z possède une valeur de 4 à 8.

13. Procédé suivant la revendication 12, dans lequel l'amine consiste en une polyalkylène-polyamine dans laquelle le groupe alkylène contient 2 à 40 atomes de carbone et la polyalkylène-polyamine contient 5 à 9 atomes d'azote par molécule.

14. Procédé suivant la revendication 13, dans lequel ladite matière productrice d'acide dicarboxylique mono-insaturé en C₄ à C₁₀ à substitution hydrocarbyle consiste en un polyisobutylène ayant une moyenne numérique du poids moléculaire de 900 à 5000, substitué avec des groupements anhydride succinique, l'amine consiste en une polyalkylène-polyamine dans laquelle les groupes alkylène contiennent 2 à 6 atomes de carbone et ladite polyalkylène-polyamine contient 5 à 9 atomes d'azote par molécule, et ledit composé de type acrylate comprend au moins un élément choisi entre les groupes comprenant l'acrylate de méthyle, l'acrylate d'éthyle, l'acrylate de propyle, l'acrylate de butyle, le méthacrylate de méthyle, le méthacrylate d'éthyle, le méthacrylate de propyle et le méthacrylate de butyle.

15. Procédé suivant l'une quelconque des revendications 12 à 14, dans lequel le polymère oléfinique consiste en polyisobutylène et la moyenne numérique du poids moléculaire du premier polymère oléfinique est comprise dans l'intervalle de 1300 à 4000.

16. Concentré contenant 3 à 45% en poids du produit de polyaddition en C₅ à C₉ suivant l'une quelconque des revendications 1 à 11.

17. Concentré suivant la revendication 16, contenant 10 à 35% en poids du produit de polyaddition en C₅ à C₉ suivant la revendication 4.

18. Composition d'huile lubrifiante comprenant 0,1 à 20% en poids du produit de polyaddition en C₅ à C₉ préparée suivant l'une quelconque des revendications 1 à 11.

Patentansprüche


1. Poly(C₅-C₉)addukt eines aminierten, kohlenwasserstoffsubstituierten Dicarbonsäure produzierenden Materials, daß als Öladditiv brauchbar ist und hergestellt wird, indem

(A) ein langkettig-kohlenwasserstoffsubstituiertes, monoungesättigtes C₄-C₁₀-Dicarbonsäure produzierendes Material, das durch Umsetzen eines Olefinpolymeren aus einem C₂-C₁₀-Monoolefin, das ein durchschnittliches zahlenmäßiges Molekulargewicht von 300 bis 10000 hat, mit einem monoungesättigten



C₄-C₁₀-Säurematerial gebildet worden ist, wobei das säureproduzierende Material im Durchschnitt mindestens 0,8 Dicarbonsäure produzierende Reste pro Molekül des in der Reaktionsmischung zur Bildung des säureproduzierenden Materials vorhandenen Olefinpolymeren aufweist,

(B) ein Amido-Amin oder ein Thioamido-Amin, das dadurch gekennzeichnet ist, daß es ein Reaktionsprodukt aus mindestens einem Polyamin und einer α,β -ungesättigten Verbindung mit der Formel :



ist, worin X Schwefel oder Sauerstoff ist, Y für —OR⁴, —SR⁴ oder —NR⁴ (R⁵) steht und R¹, R², R³, R⁴ und R⁵ gleich oder verschieden sind und für Wasserstoff oder substituierte oder unsubstituierte Kohlenwasserstoffreste stehen, und

(C) ein C₅-C₉ Lactonmaterial umgesetzt werden, wobei das Poly(C₅-C₉)addukt die Einheit —[C(O)(CH₂)_zO]_m— enthält, worin m einen Durchschnittswert von 0,2 bis 100 hat und z = 4 bis 8 ist.

2. Poly(C₅-C₉)addukt nach Anspruch 1, bei dem die Reaktanten (A) und (B) zuerst kontaktiert werden und dann die Zugabe von Reaktant (C) erfolgt.

3. Poly(C₅-C₉)addukt nach Anspruch 1, bei dem die Reaktanten (B) und (C) zuerst kontaktiert werden und anschließend die Zugabe von Reaktant (A) erfolgt.

4. Poly(C₅-C₉)addukt nach einem der Ansprüche 1 bis 3, bei dem das Polyamin Amine umfaßt, die 2 bis 60 Rohlenstoffatome und 3 bis 12 Stickstoffatome pro Molekül enthalten.

5. Poly(C₅-C₉)addukt nach Anspruch 4, bei dem das Amin ein Polyalkylenpolyamin umfaßt, bei dem die Alkylengruppen 2 bis 40 Kohlenstoffatome enthalten und das Polyalkylenpolyamin 5 bis 9 Stickstoffatome pro Molekül enthält.

6. Poly(C₅-C₉)addukt nach Anspruch 1, bei dem das kohlenwasserstoffsubstituierte, monoungesättigte C₄-C₁₀-Dicarbonsäure produzierende Material Polyisobutylen umfaßt, das ein durchschnittliches zahlenmäßiges Molekulargewicht von 900 bis 5000 aufweist und mit Bernsteinsäureanhydridresten substituiert ist, das Polyamin Polyalkylenpolyamin umfaßt, worin die Alkylengruppen 2 bis 6 Kohlenstoffatome enthalten und das Polyalkylenpolyamin 5 bis 9 Stickstoffatome pro Molekül enthält, und die α,β -ungesättigte Verbindung mindestens eine aus Methylacrylat, Ethylacrylat, Propylacrylat, Butylacrylat, Methylmethacrylat, Ethylmethacrylat, Propylmethacrylat und Butylmethacrylat ausgewählte Verbindung umfaßt.

7. Poly(C₅-C₉)addukt nach einem der Ansprüche 1 bis 6, bei dem das Olefinpolymer Polyisobutylen umfaßt, und das durchschnittliche zahlenmäßige Molekulargewicht des Olefinpolymeren 1300 bis 4000 beträgt.

8. Poly(C₅-C₉)addukt nach einem der Ansprüche 1 bis 7, bei dem das monoungesättigte Säurematerial Maleinsäureanhydrid umfaßt.

9. Poly(C₅-C₉)addukt nach einem der Ansprüche 1 bis 8, bei dem 1 bis 5 Mole des säureproduzierenden Materials pro primärem Stickstoffäquivalent des Amido-Amins in der Reaktionsmischung vorhanden sind.


10. Poly(C₅-C₉)addukt nach Anspruch 9, bei dem das Amido-Amin im Durchschnitt 1 bis 3 Amidogruppen pro Molekül enthält.

11. Poly(C₅-C₉)addukt nach einem der Ansprüche 1 bis 10, bei dem das C₅-C₉ Lacton E-Caprolacton ist.

12. Verfahren zur Herstellung eines als Öladitiv brauchbaren Poly(C₅-C₉)addukts, bei dem

(a) ein kohlenwasserstoffsubstituiertes C₄-C₁₀-Monoolefin mit einem durchschnittlichem zahlenmäßigen Molekulargewicht von 700 bis 10000 und ein monoungesättigtes C₄-C₁₀-Säurematerial zur Verfügung gestellt werden, wobei im säureproduzierenden Material im Durchschnitt mindestens 0,8 Dicarbonsäure produzierende Reste pro Molekül des in der Reaktionsmischung zur Bildung des säureproduzierenden Materials verwendeten Olefinpolymeren vorhanden sind ;

(b) eine Amido-Aminverbindung zur Verfügung gestellt wird, die mindestens eine primäre Aminogruppe aufweist und hergestellt wird, indem mindestens ein Polyamin mit mindestens einer α,β -ungesättigten Verbindung der Formel :



umgesetzt wird, worin X Schwefel oder Sauerstoff ist, Y für —OR⁴, —SR⁴, oder —NR⁴ (R⁵) steht und R¹, R², R³, R⁴ und R⁵ gleich oder verschieden sind und für Wasserstoff oder einen substituierten oder unsubstituierten Kohlenwasserstoffrest stehen,

(c) das säureproduzierende Material mit der Amido-Aminverbindung unter Bedingungen kontaktiert wird,



die ausreichen, die Reaktion mindestens eines Teils der primären Aminogruppen der Amido-Aminverbindung mit mindestens einem Teil der säureproduzierenden Gruppen des säureproduzierenden Materials zur Bildung eines ersten Addukts zu bewirken.

(d) das erste Addukt mit einem C₅-C₉-Lactonmaterial unter Bedingungen kontaktiert wird, die ausreichen, den Lactonring des Lactonmaterials zu öffnen, um das Poly(C₅-C₉)addukt zu bilden, das die Einheit $-\text{[C(O)(CH}_2\text{)}_z\text{O]}_m-$ enthält, worin m einen durchschnittlichen Wert von 0,2 bis 100 hat und z gleich 4 bis 8 ist.

13. Verfahren nach Anspruch 12, bei dem das Amin ein Polyalkylenpolyamin umfaßt, bei dem die Alkylengruppen 2 bis 40 Kohlenstoffatome enthalten und das Polyalkylenpolyamin 5 bis 9 Stickstoffatome pro Molekül enthält.

14. Verfahren nach Anspruch 13, bei dem das kohlenwasserstoffs substituierte, monoungesättigte C₄-C₁₀-Dicarbonsäure produzierende Material Polyisobutylen mit einem durchschnittlichen zahlenmäßigen Molekulargewicht von 900 bis 5000 umfaßt, das mit Bernsteinsäureanhydridresten substituiert ist, das Amin Polyalkylenpolyamin umfaßt, worin die Alkylengruppen 2 bis 6 Kohlenstoffatome enthalten und das Polyalkylenpolyamin 5 bis 9 Stickstoffatome pro Molekül enthält, und die Verbindung vom Acrylat-Typ mindestens eine aus Methylacrylat, Ethylacrylat, Propylacrylat, Butylacrylat, Methylmethacrylat, Ethylmethacrylat, Propylmethacrylat und Butylmethacrylat ausgewählte Verbindung umfaßt.

15. Verfahren nach einem der Ansprüche 12 bis 14, bei dem das Olefinpolymer Polyisobutylen umfaßt und bei dem das durchschnittliche zahlenmäßige Molekulargewicht des ersten Olefinpolymeren 1300 bis 4000 beträgt.

16. Konzentrat, das 3 bis 45 Gew.% des Poly(C₅-C₉)adduktes gemäß einem der Ansprüche 1 bis 11 enthält.

17. Konzentrat nach Anspruch 16, das 10 bis 35 Gew.% des Poly(C₅-C₉)addukts gemäß Anspruch 4 enthält.

18. Schmierölzusammensetzung, die 0,1 bis 20 Gew.% des Poly(C₅-C₉)addukts enthält, das gemäß einem der Ansprüche 1 bis 11 hergestellt wurde.