



- (51) International Patent Classification:
H04W 40/22 (2009.01)
- (21) International Application Number:
PCT/IL2013/050229
- (22) International Filing Date:
12 March 2013 (12.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/610,553 14 March 2012 (14.03.2012) US
- (71) Applicant: **MAXTECH COMMUNICATION NETWORKS LTD.** [IL/IL]; 2 Haprat St., 81101 Yavne (IL).
- (72) Inventors: **MATUSOVSKY, Yakir**; Reuven and Bat Sheva 7/8, 75357 Rishon le Zion (IL). **HANUNI, Uzi**; Emek HaEla 123, 99825 Givat Yeshayahu (IL). **DAGAN, Boaz**; Fikus 22/2, 70700 Gedera (IL).
- (74) Agents: **DR. EYAL BRESSLER LTD** et al.; 11 Tuval Street, Lazrom House, 52522 Ramat Gan (IL).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

[Continued on next page]

- (54) Title: HEURISTIC SPANNING METHOD AND SYSTEM FOR LINK STATE ROUTING

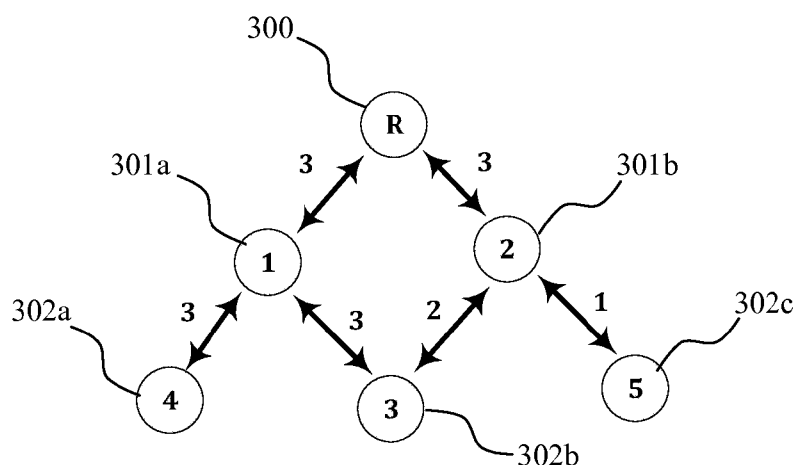


Fig. 3

- (57) Abstract: A system and method for selecting at least one relay in a communication network; the network comprises a plurality of nodes; each of the nodes comprises at least one processing unit; each pair of the nodes is characterized by a first connection number; a first score is associated with each pair of (i) first connection number; and (ii) second first connection number; each of the processing unit is programmed to execute the method.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*