



(51) International Patent Classification:

H03H 9/72 (2006.01) *H04B* 1/18 (2006.01)
H04N 5/46 (2006.01) *H04B* 1/00 (2006.01)

(21) International Application Number:

PCT/EP2010/066383

(22) International Filing Date:

28 October 2010 (28.10.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **EPCOS AG** [DE/DE]; St.-Martin-Str. 53, 81669 Munich (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **QUEK, James** [SG/SG]; Blk 34, Upper Cross Street, #11-138, Singapore S050034 (SG). **NG, Beng Chuan** [SG/SG]; Blk 642, Choa Chu Kang, Street 64, #11-79, Singapore S680642 (SG).

(74) Agent: **EPHING HERMANN FISCHER PATENTANWALTSGESELLSCHAFT MBH**; Ridlerstr. 55, 80339 Munich (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SWITCHABLE FILTER

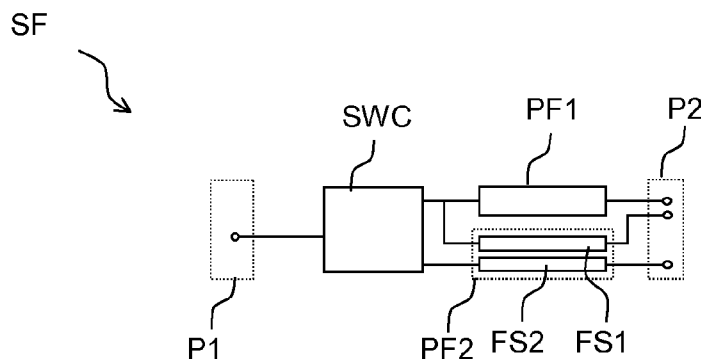


Fig. 3

(57) Abstract: A switchable filter for different transmission standards that is produceable in a cost-efficient manner and that has reduced cross-talk between different signal paths is provided. The switchable filter comprises a first partial filter, a second partial filter and a switch circuit that can switch between a first state and a second state. In the first state, the first partial filter is electrically connected to a first port. In the second state, the first partial filter is electrically separated from the first port.