

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 August 2004 (26.08.2004)


PCT

(10) International Publication Number
WO 2004/071676 A1

- (51) International Patent Classification⁷: **B05C 17/005**, 21/00, B65D 83/76
- (21) International Application Number: PCT/AU2004/000139
- (22) International Filing Date: 10 February 2004 (10.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 2003900623 11 February 2003 (11.02.2003) AU
- (71) Applicant (for all designated States except US): **CONCEPT EXPRESS PTY LTD** [AU/AU]; 8/6 Thames Street, Balmain, NSW 2041 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BRAAMS, John** [AU/AU]; 51 Burns Crescent, Chiswick, NSW 2046 (AU).
- (74) Agent: **MISCHLEWSKI, Darryl**; IP Strategies, PO Box 1254, Camberwell, VIC 3124 (AU).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: A FLUID DISPENSING ACCESSORY

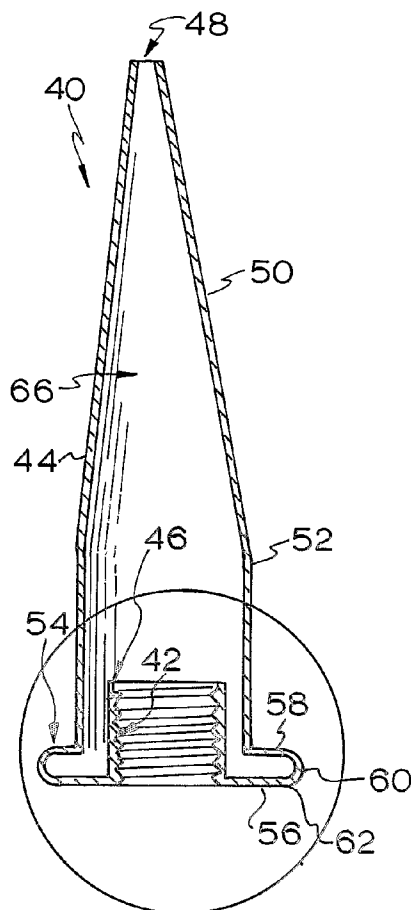

(57) Abstract: A nozzle for a caulking gun incorporates a resilient portion that is compressed when the trigger of the caulking gun is actuated and resumes its former shape when the trigger is released to expand the internal volume of the nozzle. In one embodiment a resiliently compressible insert is mounted within a conventional nozzle and the insert has a hollow body which has an inlet facing the nozzle inlet and an outlet facing the nozzle outlet and the outlet of the compressible insert is of larger diameter than the inlet of the compressible portion. In another embodiment the nozzle incorporates a resiliently compressible folded flange extending radially of the body portion adjacent to the inlet of the nozzle.

WO 2004/071676 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*