



(51) International Patent Classification:
B25H 7/00 (2006.01) **B23Q 33/00** (2006.01)

(21) International Application Number:
PCT/AU2010/000947

(22) International Filing Date:
28 July 2010 (28.07.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2009903508 28 July 2009 (28.07.2009) AU

(71) Applicant (for all designated States except US):
THINGAMEJIG PTY LTD [AU/AU]; 11 Ceduna
Close, Torquay, VIC 3228 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CHAMBERLAIN,**
Peter Anthony [AU/AU]; 11 Ceduna Close, Torquay,
VIC 3228 (AU).

(74) Agent: **SMOORENBURG PINI PATENT & TRADE**
MARK ATTORNEYS; P.O. Box 515, Ringwood, VIC
3134 (AU).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR TRANSCRIBING A PROFILE

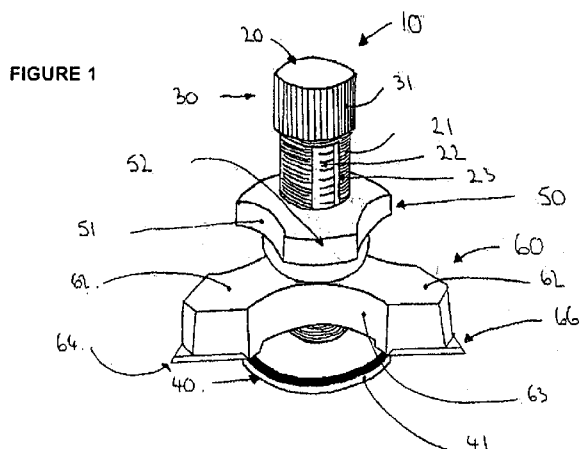

(57) Abstract: The present invention relates to the field of cabinetry, cabinet making and the building industry in general. In particular, the invention relates to a method and apparatus for transcribing a profile of a reference surface onto a target surface. In one form, the present invention provides a scribe tool comprising at least one marking portion operatively associated with a reference surface following portion, the at least one marking portion extending laterally beyond the perimeter of the reference surface following portion and comprising at least one marking region forming an angle of 90° or less at its outer extent.