

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number  
**WO 2004/006242 A2**

(51) International Patent Classification<sup>7</sup>: **G11B 15/66**

(21) International Application Number:  
PCT/US2003/017963

(22) International Filing Date: 6 June 2003 (06.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/189,811 3 July 2002 (03.07.2002) US

(71) Applicant: SEGWAY SYSTEMS, LLC [US/US]; 10488  
West Centennial Road, Littleton, CO 80127 (US).

(72) Inventors: GAVIT, Stephan, E.; 10488 W. Centennial  
Road, Littleton, CO 80127 (US). GOLDSMITH, Christo-  
pher, D.; 8219 W. Laurel Place, Unit A, Littleton, CO  
80128 (US).

(74) Agents: MARTIN, Timothy, J. et al.; Timothy J. Martin,  
P.C., Suite 200, 9250 W. 5th Avenue, Lakewood, CO 80226  
(US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU,  
ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *without international search report and to be republished  
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(54) Title: RELEASABLY LATCHABLE LEADER BLOCK IN TAPE THREADING APPARATUS FOR DATA STORAGE SYS-  
TEMS AND METHOD THEREFOR

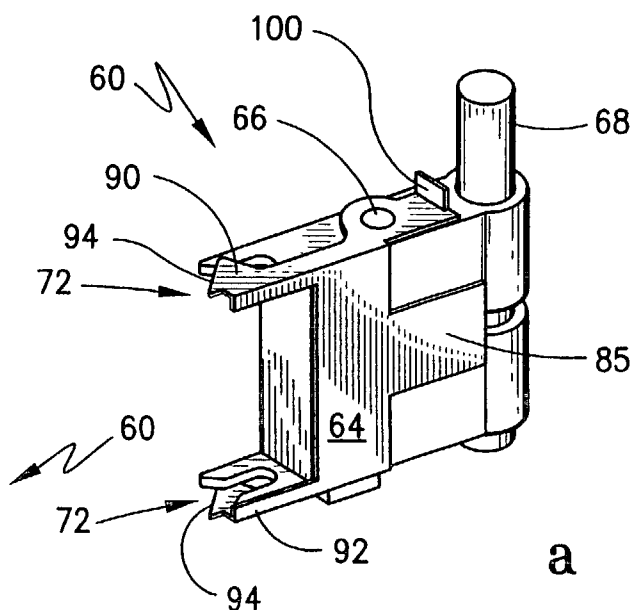

(57) Abstract: A leader block in a read/write recording apparatus includes a body member and a latch member that move relative to each other to receive, engage and retain the leader pin on a tape medium. The leader block may include finger-like engagement structures. The catch piece can be biased toward a closed position and can include a ramp to facilitate initial engagement of the leader pin. The catch piece can include an actuator tab. A threading assembly is disclosed to incorporate the leader block and includes an actuator that selective operates the catch piece via the actuator tab to permit disengagement of the leader pin therefrom. A cam assembly may control the actuator. This assembly is disclosed in conjunction with a threading assembly that includes a flexible conveyor member received in a guide track. A method utilizing this structure is described.